

48" Class LED HDTV

SE48FY19

- 48" DIAGONAL LED PANEL
- 1080P FULL HD PANEL RESOLUTION
- **60 HZ PANEL REFRESH RATE**
- **3 HDMI CONNECTIONS**
- **USB PORT FOR JPEG IMAGES**
- 1 YEAR REPLACEMENT WARRANTY

Upgrade your TV with the brilliant Seiki 48-inch 1080p LED HDTV. The popular Seiki model features 1,920 x 1,080 Full HD resolution with 60 Hz refresh rate to offer top picture quality and performance.

Among its feature set are advanced direct-lit LED technology for super bright HD video, and choice audio components to match its picture quality. The Seiki 48-inch Full HD model also offers built-in digital and analog channel tuning, multiple video and audio connections to fit everyone's digital entertainment needs.

For all of its HDTV models. Seiki offers its oneyear replacement warranty through its U.S.-based customer support.













UPC CODE: 819456010538








DISPLAY SPECS	
Diagonal Panel Size	48 in
Active Area	1,054.08 mm (H) x 592.92 mm (V)
Aspect Ratio	16:9
Panel Resolution	1,920 x 1,080
Panel Refresh Rate	60 Hz
Brightness	250 cd/m2
Dynamic Contrast ratio	3,000:1
Viewing Angle	178°(H) x 178°(V)
Dot Pitch	0.54 mm (H) x 0.54 mm (V)
Maximum Color	1.07 billion
Response time Gray-Gray	8 ms

ELECTRONICS	
DNR	3D
Digital Comb Filter/Type	3D

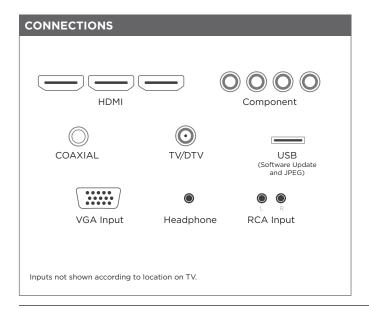

FEATURES

Built-in 3D PAL/NTSC Comb Filter

Built-in 3D Video Noise Reduction

Built-in BTSC/SAP

Over-the-air ATSC/NTSC RF Input Support

Digital/analog Channel Auto Tuning

V-CHIP Support/CCD/Favorite Channel

480I, 576I, 480P, 576P, 720P, 1080P, 1080I

Component + HDMI Supports

OSD Language English/French/Spanish

TV SYSTEM & VIDEO STANDARDS

ATSC/NTSC M TV System

Channel CATV - UHF/VHF AIR (2-69); CABLE (1-135)

Composite/C-Video Input PAL/NTSC

VGA RESOLUTIONS

640 x 480 800 x 600 1,024 x 768 1,280 x 1,024 1,360 x 768 1,920 x 1,080

ACCESSORIES INCLUDED

Remote Control (Batteries Included)

User Manual/Quick Start Guide/Warranty Card

POWER REQUIREMENTS

Power Source	AC 100-240V 50/60Hz
Power On Consumption	<110W
Standby Consumption	<0.5W
Operating Temperature	41°F-95°F
Operating Humidity	20%-80%

WARRANTY & SUPPORT

1 Year Replacement Warranty

Toll-free Customer Support

Online Manual/Firmware Access

