



**Configuration:**

LT-800-072-01 Stationary RF Transmitter (216 MHz) (North America)

**Product Overview:**

Thanks to its outstanding audio quality, the Listen LT-800 Stationary Transmitter can be used in a variety of applications. The LT-800 connects to your main audio system, to broadcast a high quality audio signal to belt pack receivers or stationary receivers. The end result – your audience can hear and understand the presentation better because of improved speaker placement or because they have their own belt pack and headset. The signature Look & Listen™ LCD shows channel, lock, programming and RF power.

**Highlights:**

- Superior audio quality – 80 dB signal-to-noise ratio (SNR), setting the industry's sound quality standard
- 57 channels
- 100% Digital – Listen transmitters are digitally-tuned so the transmission won't drift
- Use up to six (6) simultaneously on 72 MHz
- Limited Lifetime Warranty
- Look & Listen™ LCD shows channel, channel lock, and programming information
- Balanced/Unbalanced Inputs – you can interface with any audio source on the market
- Designed for installation – rack mountable with optional remote antennas make installation easy and service reliable
- Auto Processor – to condition the audio for voice/music prior to transmission
- VU level meter and test tone – simply makes the installation easier to set-up
- 30-day no obligation demonstrations available
- Many accessory options make Listen products ideal for a wide range of applications


**Includes:**

- One (1) LT-800 Stationary RF Transmitter (72 MHz)
- One (1) LA-207 Power Supply for LT-800
- One (1) Line Cord
- One (1) Quick reference card

**Architectural Specification:**

The stationary RF transmitter shall be capable of broadcasting on 57 channels. The transmitter shall have an SNR of 80 dB or greater. The output power shall be adjustable to quarter, half or full. Channel tuning shall be capable of being locked. The device shall have an audio frequency response of 50 Hz to 15k Hz,  $\pm 3$  dB at 72 MHz. It shall have two (2) mixing audio inputs and a mixed signal output. The device shall have the following audio controls: input level, mix level and an adjustable low pass filter (contour). The device shall have an audio processor that is capable of automatic gain

control and limiting. The Listen LT-800-072 is specified.

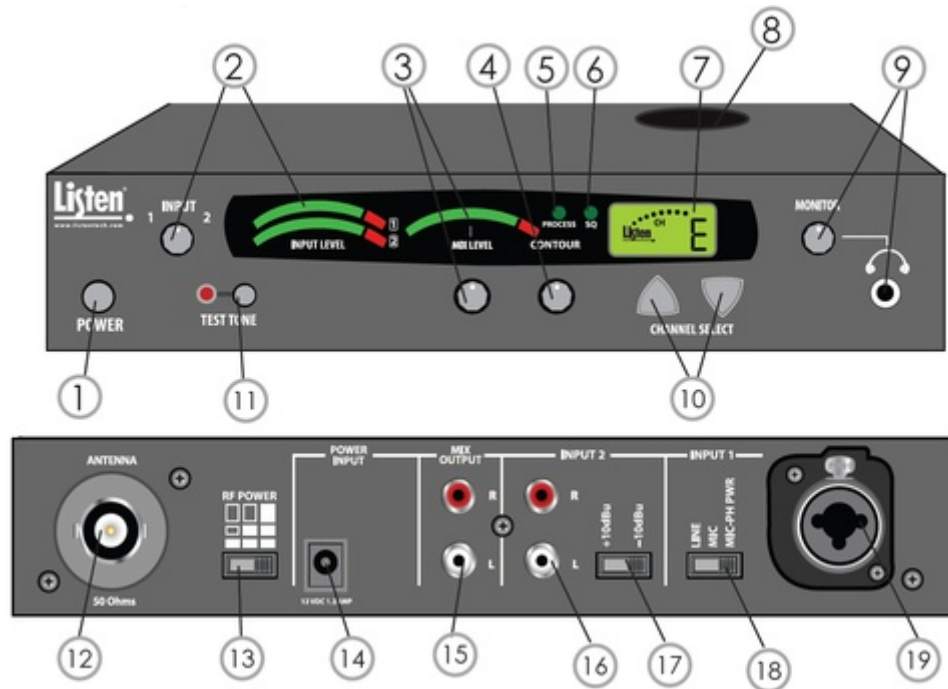

**Stationary RF Transmitter (72 MHz) Product Features:**

1. POWER: Easy access from the front to turn unit On/Off.
2. INPUT 1 & 2 AND INPUT LEVEL INDICATORS: Adjust audio levels of Input 1 and 2. Dual VU meters shows audio Input 1 and 2 levels.
3. MIX LEVEL & MIX TRANSMIT LEVELS: Mix Level control sets level of mixed audio. VU meter shows the output level of your mixed audio.
4. CONTOUR: Contour equalization Cuts/Boosts frequencies above 5 kHz.
5. PROCESS LED: Processing (automatic gain control and compression) can be turned on and off from the front panel.
6. SQ™ LED: (Super Quiet Companding Technology) can be turned on and off from the front panel.
7. LCD DISPLAY: Shows channel selected, channel lockout, programming, and RF power.
8. RF ANTENNA OUTPUT: Top mount antenna jack for top mounted telescoping antennas.
9. MONITOR LEVEL: Earphone jack and volume control to check audio integrity of transmission source.
10. CHANNEL SELECT: UP/DOWN channel selection of 57 channels. User can easily change between Basic and Expanded modes.
11. TEST TONE: The test tone level is adjustable, which adds flexibility when setting up and testing system.
12. RF ANTENNA OUTPUT: Top mount, rear mount, and remote antenna options.
13. RF POWER LEVEL: Multiple transmitter power settings (full, ½ and ¼) with indication on LCD display.
14. POWER INPUT: In-line power supply (included) attaches.
15. AUDIO OUTPUTS: Two (2) phono connectors for a mixed output of Inputs 1 and 2.
16. AUDIO INPUT 2: Two (2) unbalanced phono audio inputs. Select either +10 dBu or -10 dBu.
17. INPUT 2 LEVEL SWITCH: Set switch to match the level of Input 2 source.
18. INPUT 1 LEVEL SWITCH: Set switch for line or mic level. Phantom power available in Mic-PH power position.
19. AUDIO INPUT 1: Balanced XLR / ¼ inch audio input. Select either mic, line, or mic phantom power level for input. Electret (Condenser) microphones can be used with Input 1, mic, and phantom power.

Product Specification: Stationary RF Transmitter (72 MHz)	
Audio	
Frequency Response	50 Hz - 15 kHz ( $\pm 3$ dB)
Signal-to-Noise Ratio	SQ enabled 80 dB, SQ disabled 60 dB
Distortion	<2% total harmonic distortion (THD) at 80% deviation
Audio Input 1	Rear panel, one (1) Female XLR or 1/4 in combo connector, balanced, 0 / -55 dBu (line/mic) nominal input level adjustable, -30 / +21 dBu (line/mic) maximum input level, impedance 20k / 1k ohm (line/mic), phantom power +12 VDC
Audio Input 2	Rear panel, two (2) phono connectors, unbalanced, -10 / +10 dBu nominal input level adjustable, +30 dBu maximum, impedance 100k ohm
Audio Processing	Compression can be turned on/off, slope internally adjustable from 1:1 to 4:1, default 2:1
Contour	Cuts and boosts frequencies above 5 kHz
Audio Output	Input 1 and input 2, mixed output (rear panel), two (2) phono connectors, unbalanced, -10 dBu nominal output level, +15 dBu maximum, impedance 10 ohm
Headphone Output	Front panel, one (1) 3.5 mm (0.14 in.) stereo connector, unbalanced, adjustable output level, +3 dBu maximum, impedance 10 ohm
Controls	
User Controls	Front Panel: Power, test tone on/off, channel up/down, input levels, mix level, contour, monitor volume control Rear Panel: Input 1 Level, (Line, Mic, Mic-Phantom Power), Input 2 level (-10 / +10 dBu), RF power level (low, mid, high)
Internal Adjustments	Compression ratio for audio processor
Programming	SQ on/off, process on/off, channel lock
Indicators	
Audio Input Status LEDs	Indicates Input 1, Input 2, and Mix audio levels; 10 segment LED's (8 green, 2 red)
Processing	Indicated by a green LED when on (front panel)
RF Power	Indicated on the LCD (low, mid, high)
LCD	Channel designation, lock status, RF power level, programming (front panel)
Test Tone	Red LED illuminates when test tone is enabled.
RF	
Frequency Range	72.025 - 75.950 MHz

Listen Technologies Corporation \* 14912 Heritagecrest Way \* Bluffdale \* Utah 84065-4818 U.S.A.

+1.801.233.8992 \* +1.800.330.0891 North America \* +1.801.233.8995 Fax

Listen Technologies Corporation All rights reserved 91407 - Created Aug. 11, 2014

Number of Channels	17 wide band, 40 narrow band
Number of Simultaneous Transmitters	6
Frequency Accuracy	± .005% stability +32° to +122 °F (0° to +50 °C)
Transmitter Stability	50 PPM
Transmission Range	Up to 1,500 ft. (457 m)
Output Power	80,000 uV at 3 m
Antenna Type	Various antennas available
Antenna Connector	BNC
Power	
Compliance	UL, CE, GS, TÜV, RoHS
Power Supply	In line power supply, Listen part number LA-207 (Line cord is determined by the each Country's AC power standards)
Power Supply Input	100-240 VAC, 50-60 Hz, 0.4 A
Power Supply Output	12 VDC, 1.3 A, 15.6 W
Power Supply Connector	0.02 in (5.0 mm) OD, 0.01 in. (2.5 mm) ID, barrel type
Physical	
Height	1.75 in. (4.5 cm)
Width	8.50 in. (21.5 cm)
Depth	9.13 in. (23 cm)
Color	Dark Grey with white silk screening
Weight	2.6 lbs. (1.2 kg)
Unit Weight with Power Supply	3.5 lbs. (1.6 kg)
Rack Mounting	One (1) rack space height, 1/2 rack space wide. One (1) or two (2) transmitters can be mounted in one rack space, optional rack mount (LA-326)
Shipping Weight	6.0 lbs. (2.7 kg)
Environmental	
Temperature - Operation	-10 °C (14 °F) to +40 °C (104 °F)
Temperature - Storage	-20 °C (-4 °F) to +50 °C (122 °F)
Relative Humidity	0 to 95% relative humidity, non condensing
Compliance	
Safety	RoHS

Listen Technologies Corporation \* 14912 Heritagecrest Way \* Bluffdale \* Utah 84065-4818 U.S.A.

+1.801.233.8992 \* +1.800.330.0891 North America \* +1.801.233.8995 Fax

Listen Technologies Corporation All rights reserved 91407 - Created Aug. 11, 2014

LT-800-072-01

Stationary RF Transmitter (72 MHz)



RF	FCC Part 15, Part 90, Industry Canada
----	---------------------------------------