


# PLEASE READ

**S1297-96 will only work with the AmpliVox SW925-96 and SW800-96 Portable PA Systems installed with wireless speaker transmitter.**

Today's wireless world can be frustrating. Many factors can contribute to the performance of wireless signals. The wireless microphone receiver and wireless speaker transmitter and receiver all have 96 channels to chose from for a clear transmission.

**Wireless Microphone / Receiver Set-up:** First select channel to use for microphone transmission (A). Wireless receiver, microphone or body pack must all be on the same channel (see owner's manual for directions). Once selected, test that you do not have any interference.

**Wireless Speaker Set-up:** On the wireless speaker transmitter (B) select a channel that is at least 6 channels away from channel selected for the wireless microphone (A). Example: If channel 5 was selected for the microphone then select channel 11 for the speaker transmitter and receiver (C). **Do not select same channel as used on wireless microphone.** Now turn on the wireless microphone, wireless microphone receiver (A), wireless speaker transmitter (B) and the wireless speaker receiver (C). Test system for clear transmission between both speakers. If you do not get a clear transmission, select a new channel on the wireless speaker transmitter (B) and receiver (C).

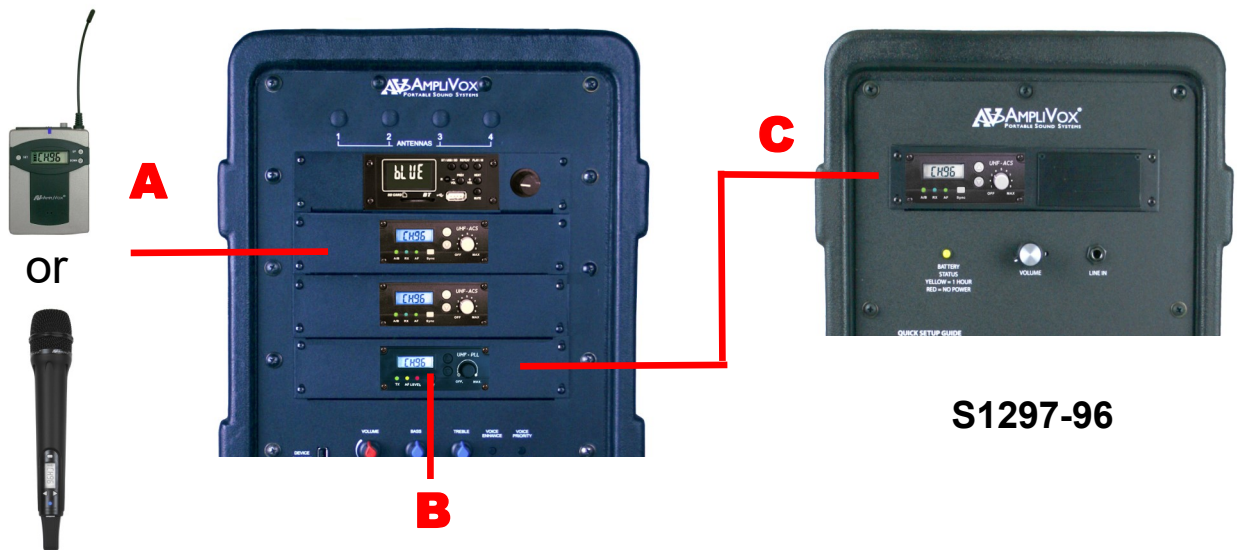

**SW925-96 shown**

## FREQUENCY CHART

514 - 544 MHz					
Channel	Frequency	Channel	Frequency	Channel	Frequency
1	514.1	33	523.8	65	519.3
2	543.9	34	529.5	66	538.9
3	529.1	35	540.3	67	527.5
4	521.5	36	518.3	68	515.5
5	537.0	37	522.4	69	529.8
6	517.4	38	535.6	70	540.9
7	533.1	39	515.0	71	514.8
8	524.5	40	528.6	72	543.2
9	539.5	41	543.7	73	528.9
10	526.3	42	521.1	74	520.4
11	538.0	43	536.4	75	536.6
12	519.7	44	517.6	76	516.7
13	531.0	45	524.7	77	525.3
14	540.6	46	532.6	78	530.4
15	523.2	47	539.7	79	542.1
16	534.8	48	515.8	80	518.9
17	517.1	49	529.3	81	537.6
18	528.4	50	537.2	82	534.3
19	542.5	51	542.7	83	523.4
20	520.0	52	518.5	84	526.7
21	531.2	53	541.5	85	520.6
22	524.1	54	522.1	86	527.7
23	536.2	55	538.2	87	518.0
24	514.4	56	525.8	88	532.1
25	526.9	57	527.1	89	538.5
26	533.9	58	533.3	90	523.6
27	539.1	59	531.6	91	533.6
28	541.3	60	535.2	92	535.9
29	516.3	61	514.6	93	515.2
30	520.9	62	543.4	94	530.7
31	532.8	63	528.1	95	542.2
32	537.4	64	522.7	96	524.3