




SINGLE MOTOR LOW VOLTAGE CONTROL (LVC)


SPECIFICATION DATA

DA-LITE SCREEN COMPANY, INC.
3100 North Detroit Street
Post Office Box 137
Warsaw, Indiana 46581-0137
Phone: 574-267-8101
800-622-3737
Fax: 574-267-7804
Toll Free Fax: 877-325-4832
www.da-lite.com
e-mail: info@da-lite.com

SUGGESTED SPECIFICATIONS: Electrical rating 115 VAC 60 Hz 5A. The single motor LVC is used to operate Da-Lite single motor electric screens from one or more locations, remote control, or for integration into a control panel system. Operated by a 3-button momentary, dry contact switch. Any combination of single or multiple 3-button switches, optional radio frequency remote or infrared remote, or a control panel with momentary dry contacts may control the LVC. Control board to be mounted in a galvanized steel housing measuring 2¹/₄" H x 4¹/₂" W x 10¹/₂" L. Standard knockouts provided on housing for 1/2" conduit connections. Control to be listed by Underwriter's Laboratories.



NOTE: This control cannot be used with the Horizon Electrol[®], Ascender[®] Electrol[®], Dual Masking Electrol[®] or Motorized Scenic Roller screens.

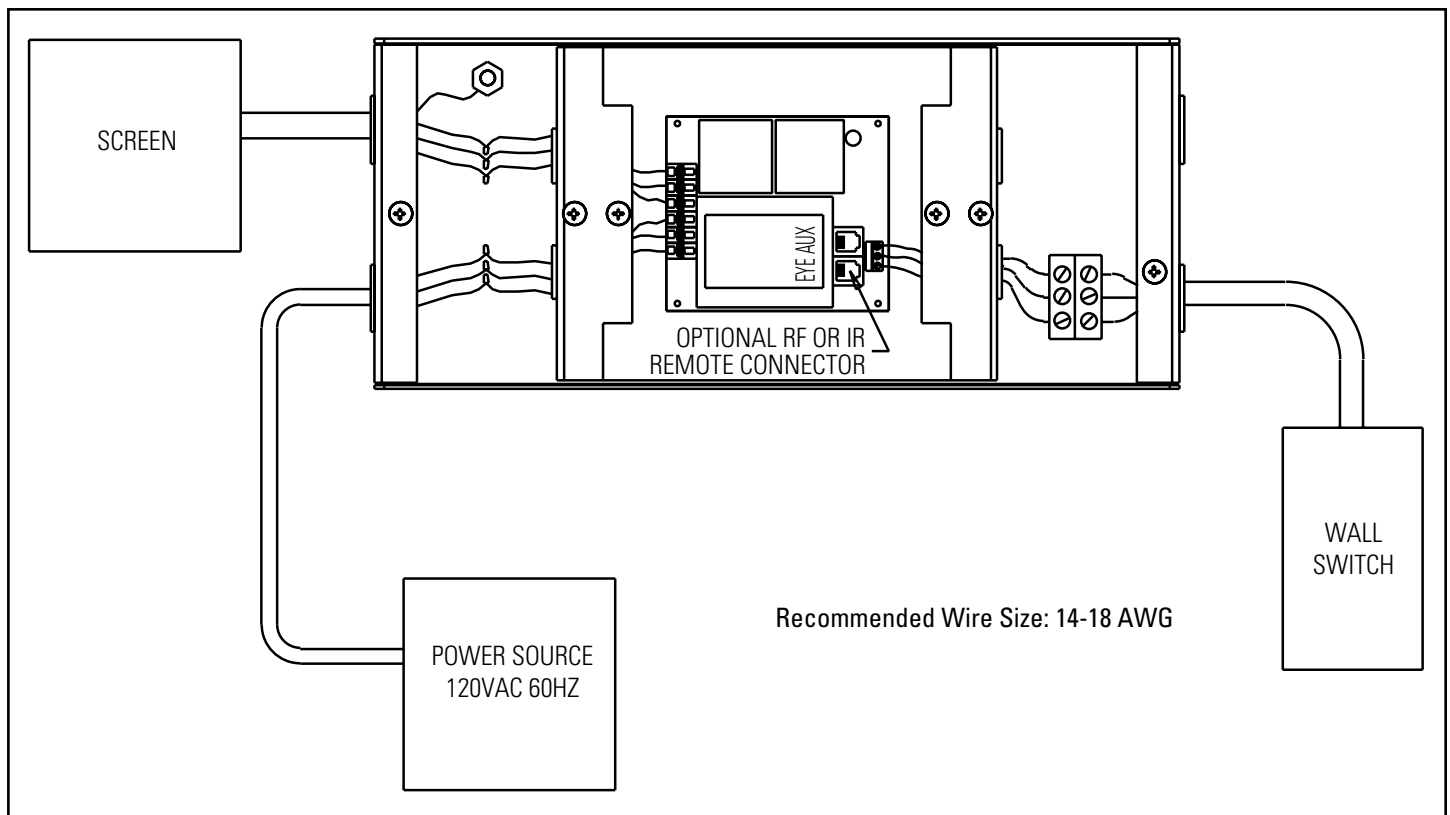

NOTE: Do not seal in – allow access.

Options:

- Radio Frequency Remote Control.
 - Radio Frequency Range Extender available
- Infrared Remote Control.
- Additional 3-button Wall Switch.
- 240V Model Available.
- Key Locking Cover Plate for 120V or Low Voltage Control (LVC).

Specifications are subject to change without notice.

Project: _____

Architect: _____

Phone: _____

Contractor: _____

Phone: _____

Supervisor: _____

Phone: _____

Date: _____

Revised: _____