
LIFT


DOWNDRAFT

The Lift Downdraft is everything you want in a luxury ventilation system—power, performance, and good looks. Packed with perks like the dual-level BriteStrip™ LED lighting, Tri-Capture


Zones and 4-Way Ducting, the Lift is ready to help you rise to any occasion with the touch of a button.



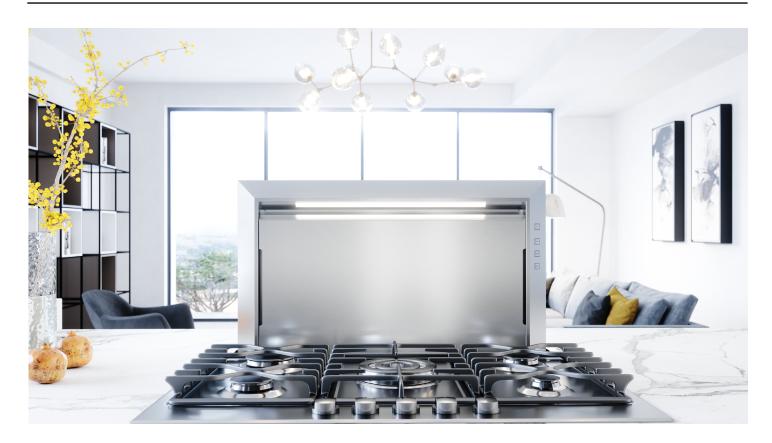

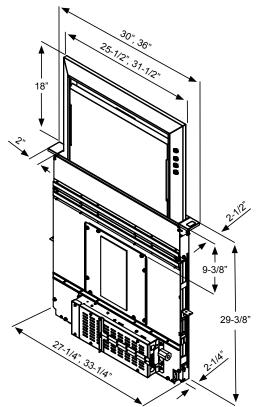

### **CUTOUT AND CLEARANCE DIMENSIONS**

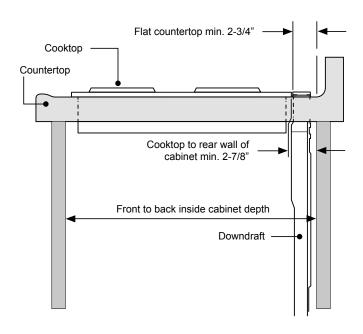

### DOWNDRAFT



MODEL		
Stainless Steel	DLI-E30ASX	DLI-E36ASX
Size	30"	36"
BLOWER PERFORMANCE		
Internal/In-Line Blower (DBI-600A)*	200-600 CFM**	200-600 CFM**
In-Line Blower (PBN-1000A)*	500-1,000 CFM	500-1,000 CFM
External Blower (CBE-1000)*	500-1,000 CFM	500-1,000 CFM
		,
FEATURES		
Controls	Capacitive Touch	Capacitive Touch
Speed Levels	3	3
Auto On/Off***	Yes	Yes
Lighting	BriteStrip™ LED, x1	BriteStrip™ LED, x1
Dual-Level Lighting	Yes	Yes
Filters	Aluminum Mesh x2	Aluminum Mesh x2
Filter Clean Reminder	Yes	Yes
Tri-Capture Zones	Yes	Yes
4-Way Ducting	Yes	Yes
18" Chimney Rise	Yes	Yes
Recirculating Option	Yes	Yes
DUCT SPECIFICATIONS		
Front Ducting	8"(DBI), 10"(PBN/CBE)	8"(DBI), 10"(PBN/CBE)
Left/Right Ducting	1-7/8" x 19" to 8"/10" round	1-7/8" x 19" to 8"/10" round
Rear Ducting	1-7/8" x 19" to 8"/10" round	1-7/8" x 19" to 8"/10" round
Bottom Ducting	1-7/8" x 19" to 8"/10" round	1-7/8" x 19" to 8"/10" round
AC POWER		
Hood w/ DBI-600A	120V, 60Hz, Max. 3A	120V, 60Hz, Max. 3A
Hood w/ PBN-1000A	120V, 60Hz, Max. 4.4A	120V, 60Hz, Max. 4.4A
Hood w/ CBE-1000	120V, 60Hz, Max. 4.3A	120V, 60Hz, Max. 4.3A
ODTIONAL ACCESSORIES		
OPTIONAL ACCESSORIES	7DC 00LF	7DC 001F
Recirculating Kit	ZRC-00LF	ZRC-00LF
ADA Compliant Remote Up/Down Control	DDA-0002	DDA-0002
Gas Cooktop Seal Kit	DDS-0030	DDS-0036
Range Trim Kit Electronics Extension Cable - 5'	DDT-0030	DDT-0036
	11030132	11030132
End Cap Trim Extension +1"	DDE-0001	DDE-0001 54190053
Front Panel Rough-In Plate, 8" Round	54190053 FIL1000FIL	
Front Panel Rough-In Plate, 10" Round	54190054	54190054 AV00070
1-7/8" x 19" to 8" Round Transition	AK00070	AK00070
1-7/8" x 19" to 10" Round Transition	AK00071	AK00071
1-7/8" x 19" Adapter for AK00080 Duct	AK00072	AK00072
1-7/8" x 19" Rectangular Duct, 2'	AK00080	AK00080
Make-Up Air Kit	MUA006A (600 CFM) MUA008A (1,000 CFM)	MUA006A (600 CFM) MUA008A (1,000 CFM)
	IVIOAUUOA (1,000 CFIVI)	WIOAOOOA (1,000 GFW)
WARRANTY	2 year parts, 1 year labor	2 year parts, 1 year labor
		U 1 11/ U11 111



<sup>\*</sup>Blower sold separately.
\*\*Lift downdraft with the DBI-600A blower can be configured to achieve 400 CFM.
\*\*\*Automatically turns on or off when raising or lowering the air vent.



## COOKING APPLIANCE CONFIGURATIONS

Accommodate multiple cooking appliance combinations thanks to our 4-way ducting system.



Cooktop



Cooktop + Oven



Range Top

Range

## 4-WAY DUCTING

Gives you the flexibility to vent in multiple directions, compatible with all blower options.



Front Exhaust



Side Exhaust



Rear Exhaust

**Bottom Exhaust** 

DOWNDRAFT

OPTIONAL **ACCESSORIES** 

**OPTIONAL ACCESSORY** 

# **ZEPH'R** ZEPHYRONLINE.COM

### **OPTIONAL ACCESSORY**

Model AK00070

#### DESCRIPTION

## Model DDA-0002

## **DESCRIPTION** Remote Up/Down Control

Use when you cannot reach the UP/ DOWN button on the downdraft chimney.


Can be located on counter top, face of cabinetry or on the side cabinet of an island. Cut-out: 2-1/4"H x 2"W

Cannot be used where remote control will interfere with cooking, where hot pans could be set, or where hot liquids could be spilled on the control.

(Remote wiring connects with 6-pin connection.)

#### 1-7/8" x 19" to 8" Round Transition

Rectangular to 8" round transition for side, rear, or bottom exhaust when using DBI-600A Blower. Can be attached to downdraft unit or rectangular duct (AK00072).




#### Model AK00071



#### 1-7/8" x 19" to 10" Round Transition

Rectangular to 10" round transition for side, rear, or bottom exhaust when using external blower. Can be attached to downdraft unit or rectangular duct (AK00072).






### Gas Cooktop Seal Kit

Recommended for use with all gas cooktops. Includes trim bracket and trim seal.


30", 36" widths



## Rectangular adapter for 1-7/8" x 19"

Use to connect 1-7/8" x 19" rectangular duct directly to downdraft when using side or rear exhaust.


#### Models DDT-0030, DDT-0036



#### Range Trim Kit

Use with free-standing range - where a gap is present between back of range and downdraft

30", 36" widths



Model AK00072

Model 54190053

Model 54190054

## Front Panel Rough-In Plate - 8" Round

Use where 8" round duct or elbow attaches to front of airbox (model DBI-600A used as remote blower installation).




Model ZRC-00LF



#### Extension Cable - 5ft.


Use where electrical panel is remotely mounted. Extends electrical panel cable an additional 5 feet.


Two can be connected to achieve 10ft.



## Front Panel Rough-In Plate - 10" Round


Use where 10" round duct or elbow attaches to front of airbox (exterior or in-line blower installation).





Use where ducting is not feasible or available. Mount to toe kick or base of a cabinet and attach directly to DBI-600A Blower using 8" round duct. Kit can be rotated so that the exhaust is not directly

at your feet. Includes recirculating filter and decorative cover plate.




## End Cap Trim Extension +1" Width



Use left and right to increase the overall trim width by 1".



Model AK00080



### Rectangular Duct - 2-ft. Sections (1-7/8" x 19")



Use to extend ducting when used in side, rear, or bottom exhaust. Can be cut down to size and multiple sections can be connected to each other.

Galvanized steel construction.

