
₹ PERMANENT INDOOR

1.8 2 3 4 5

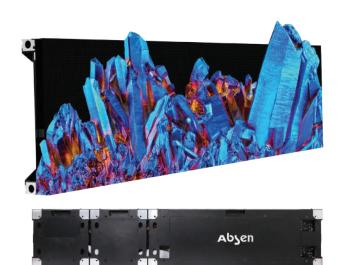

THINNER. LIGHTER. SMARTER.

Lightweight Aluminum Die-Cast Cabinet Design for easy installation and creative application

Smart Remote Monitoring and Diagnostic with live performance and failure detection


Easy Serviceability

with magnetic module design


5000:1 COLOR CONTRAST

800 nits

14 bit

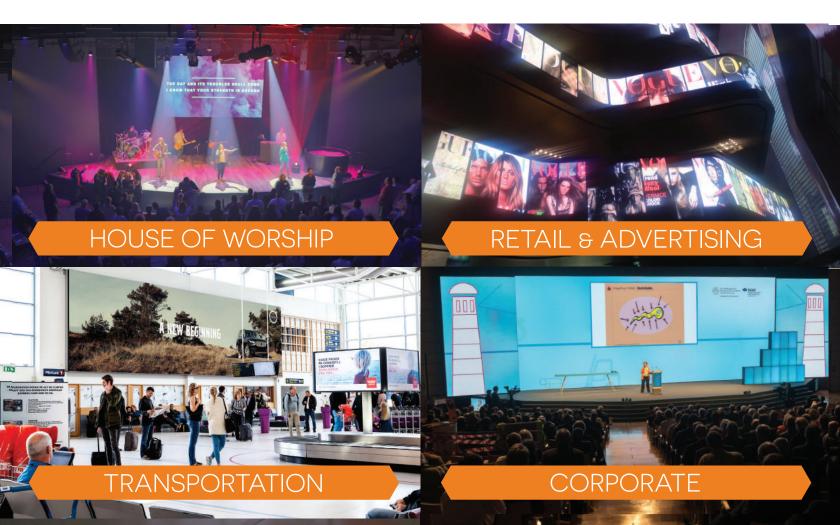

SMART REMOTE MONITORING & DIAGNOSTIC

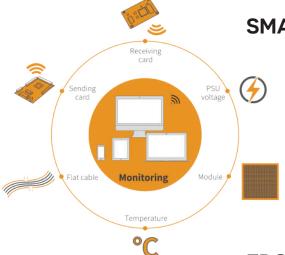

Anywhere, Anytime:

- Real-time performance tracking.
- · Live feed to mobile devices.
- Magnetic Module provides complete data storage including Module ID, Order Info, Production Date, Calibration Data, and more.




Smart Module

FRONT / REAR INSTALLATION & MAINTENANCE



- Featuring front and rear installation that provides a more convenient and easier install in any location.
- N Plus series saves installation space thanks to its 3.15" cabinet depth.
- Fast vertical or horizontal configuration thanks to 3+1+1 modular design.





SPECIFICATIONS	N1.8 PLUS	N2 PLUS	N3 PLUS	N4 PLUS	N5 PLUS
PIXEL PITCH	1.89 mm	2.4 mm	3.2 mm	4.0 mm	5.14 mm
LED TYPE	SMD1415		SMD2121		
PANEL SIZE (WxHxD)	2.8' x 11.34" x 2.13" 864 × 288 × 54 mm		4.7' x 11.34" x 2.13" 1440 x 288 x 54 mm		
CABINET MATERIAL	Aluminum Die-Cast				
PANEL WEIGHT	13.2 lb / 6 kg		22.05 lb / 10 kg		
PIXEL MATRIX PER PANEL (WxH)	456 x 152 pixels	360 x 120 pixels	450 x 90 pixels	360 x 72 pixels	280 x 56 pixels
IP RATING (FRONT/REAR)	IP40 / IP21				
VIEWING ANGLE (H/V)	140° / 120°		140° / 140°		
BRIGHTNESS	800 nits				
REFRESH RATE	1920 Hz				
GRAYSCALE	14 bit				
CERTIFICATION	TUV-CE, RoH, ETL, FCC				