



Abgen
Trusted LED Supplier



Absenicon C Slim

110"

138"

165"



Absenicon C Slim

Absenicon C Slim series is a revolutionary all-in-one LED screen. C Slim features large size, high brightness, minimalist appearance and intelligent interaction. It helps users to better facilitate presentations, brainstorming and decision-making

Delivering the Ultimate Experience >>>>



> Effective

Wireless content sharing
Multi-screen mirroring, online editing
Compatible with a variety of video conferencing software

Quick screen cast | Strong compatibility




> Convenient

Plug and play
One button to turn on/off
Remote control



> Comfort

600nits brightness
Eye protection
Screen surface temperature $\leq 40^{\circ}\text{C}$
 $\leq 25\text{dB}$ mute technology

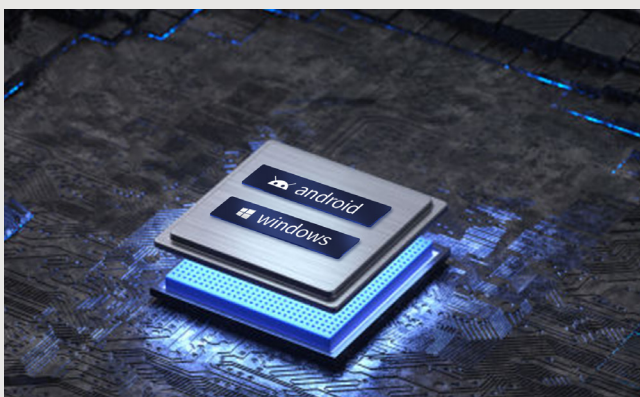

> Smart

Android 8.0 operating system / Windows 10(optional)
Color temperature and brightness adjustment
Four Scene Modes: standard/cinema/conference/soft light mode

Dual Wi-Fi channel | 4+16G storage

*Supporting for Windows system is optional. External OPS PC and the supporting structural parts are required.

Enterprise Solution >>>>

◎ Common meeting room

Ultra-wide display viewing angle, high brightness, promising a comfortable and bright meeting environment for enterprise or government.



◎ Video conference room

Compatible with mainstream video conferencing software, ensuring smooth screen share without buffering or sound sync issues.



Education Solution >>>>

◎ Lecture Hall

Born for large-scale school rooms, able to deliver an immersive learning experience for all the viewers.



6 Reasons Why **Absenicon** C Slim >>>>

Standard Large-format LED video wall

110" 138" 165" standard sizes
16:9 standard aspect ratio
Immersive viewing experience

1



All-in-One Design

Integrated display with power supply, control systems and all necessary component
No external equipment required

2



Immersive View

28.5mm* thickness
5mm* ultra-slim frame
98% screen-to-body ratio

*The upper, left, right and bottom bezel are 5/5/5/23mm respectively

*The thinnest part of the screen body is only 28.5mm

3





Stunning Visuals

High refresh rate, high gray scale,
wide color gamut

- 110% NTSC color gamut
- 1920 x 1080p
- 160° wide viewing angle

4



Easy to Operate

User-friendly interface and remote-control design
Plug and play
One click casting

5



Quick Installation and Maintenance

Wall mounting/mobile stand installation
Simple installation process saves time and labor
Dedicated magnetic tool to disassemble LED
modules

6



Diverse Applications >>>>

Absenicon is versatile and reliable, perfect for various applications.



Meeting Room

Enterprises, government, financial sector and hotels

Lecture Hall

Various education fields, national laboratories, scientific research institutions and forums

Others

Exhibitions and shows, medical, libraries, training rooms and other applications

Specifications >>>>

Product	C Series Slim Version				
	C110S		C138S		C165S
Model	C110S		C138S		C165S
Diagonal size (inch)	110		138		165
Display area (W x H) (mm)	2440×1372		3050×1715		3660×2058
Resolution	1920×1080		1920×1080		1920×1080
Screen Dimensions (W x H) (mm)	2450x1400		3060x1743		3670x2086
Installation	wall mounting	mobile stand	wall mounting	mobile stand	wall mounting
Weight (kg)	117	139	175	197	247
Brightness (nits)	600		600		600
Refresh rate(Hz)	3840		3840		3840
View angle (°)	160/140		160/140		160/140
Avg. power (w)	584		667		800
Max. power (w)	1750		2000		2400
Audio	-		-		-
Input power	100-240		100-240		100-240
Android system	Android 8.0		Android 8.0		Android 8.0
System memory	4GB		4GB		4GB
Storage	16GB		16GB		16GB
Windows system	Optional		Optional		Optional
Operating temperature	-10°C~40°C		-10°C~40°C		-10°C~40°C
Operating humidity	10~80%RH		10~80%RH		10~80%RH

*The data in this brochure are internal test results from Absen.

* Shenzhen Absen Optoelectronic Co., Ltd. reserves the right to modify product design, specifications, and parameters without further notice.

Photos are used for illustration purpose only as products may differ from these photos. All rights reserved by Shenzhen Absen Optoelectronic Co., Ltd.

Professional service, best experience >>>>

Absen has built up a global network , able to provide prompt and professional local services.

Absen service ability

Comprehensive support

Enjoy 2-year warranty, 1 to 3 years extended warranty, lifetime maintenance, and enjoy 10+ items of professional service solutions to help you solve problems

Global coverage

400+ Absen certified partners, 3000+ Absen certified engineers, covering most of the global market, the global service network is continuing to expand vigorously

Multiple service channels

Providing service via multiple channels such as Hot line, WeChat, WhatsApp, E-mail and official website to quickly take care of service requirements

24 / 7 response

24/7/365 available, quick response in 10 seconds

One-stop service

Enjoy exclusive and professional service in the whole process of pre-sales, sales and after-sales

Absen service philosophy >>>>

Initiative

Proactive care and return visits, regular touring inspection services for customers

Efficiency

All service channels respond within 10 seconds, intelligently match the best local service resources, and enjoy a fast service experience

Standardization

Comprehensive service engineer training system, ACE professional training and certification, ACP professional certification; establishing customer's product files and record the entire service process

Thoughtfulness

Longer warranty, worry-free quality

Service channels

Hot line: +86 400-700-3278 WeChat: 13923413428
WhatsApp: 008613923413428 E-mail: service@absen.com
Official website: www.absen.com

Service time(GMT+8)

8:30~24:00:Staff service
00:00~8:30: Intelligent system service

Absen Optoelectronic Co.,Ltd

Address: 18-20F Building 3A, Cloud Park, Bantian Huawei Base,
Longgang District Shenzhen, 518129, P.R.China TEL: +86-755-89747399
FAX: +86-755-89747599 E-mail: absen@absen.com Website: www.absen.com



Twitter: @LEDAbsen
LinkedIn: Absen

Facebook: @LEDAbsen
Instagram: absenled