

XD PLUS

4 6 8 10 PERMANENT OUTDOOR


**ULTRA HIGH BRIGHTNESS.
BUILT FOR DIRECT SUNLIGHT.**

Key Features

- SMD chips with smaller pixel pitch for outdoor permanent signs
- Tough weatherproof design with fully sealed modules and power supply
- Super light aluminum cabinet made 33% thinner than the X-Series
- Real-time wireless feedback on temperature, humidity and operations

Rear Installation and Maintenance

- Product comes with standard mounting holes, easy for rear installation

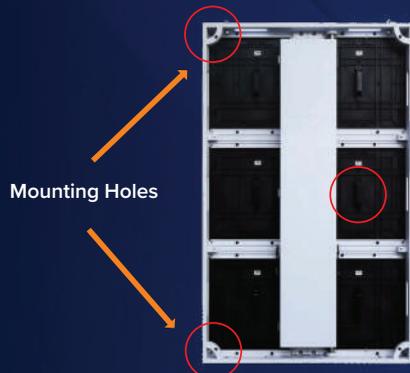

Rear Module Maintenance Steps:

1. Remove the screws with Allen wrench
2. Hold handle and pull out
3. Take out the module at a diagonal

Contact Absen to learn more:

407.203.8870 | info@usabsen.com | usabsen.com

Find us @AbsenAmerica




Front Installation and Maintenance

- Convenient front installation design ensures display maintenance without servicing channel at the back, saving space
- The installation thickness of the display is less than 7.9 inches

Front Maintenance Steps:

1. Insert tool into the maintenance hole
2. Loosen screws
3. Disassemble the module



Insert tool into the maintenance hole



Loosen screws



Disassemble the module

**Note: XD4 PLUS module is front or rear serviceable depending on the version*

Parameters

SPECIFICATIONS	XD4 Plus	XD6 Plus	XD8 Plus	XD10 Plus
PIXEL PITCH	4.44 mm	6.67 mm	8.0 mm	10.0 mm
PIXEL CONFIGURATION	SMD 1921	SMD 2727		
PANEL SIZE (WxHxD)	25" x 38" x 4" 640 x 960 x 102 mm			
CABINET MATERIAL	Aluminum Alloy			
PANEL WEIGHT	44.1 lb / 20 kg			
PIXEL MATRIX PER PANEL (WxH)	320 x 320 pixel			
IP RATING (FRONT/REAR)	IP65 / IP54			
VIEWING ANGLE (H/V)	160° / 85°	160° / 80°	160° / 75°	
BRIGHTNESS	5,000 nits	7,500 nits		
REFRESH RATE	3,840 Hz			
GRAYSACLE	16 bits			
CERTIFICATION	ETL, FCC			

All Specifications are subject to change without notice.