



Airtame Hybrid

(Airtame Hub & Airtame Rooms)
Share browser tabs, windows or
whole screen

The hardware-enabled software platform

Simplify your hybrid meetings with Airtame. Airtame Hybrid ensures reliable room conferencing, letting your team focus on the meeting, not tech details. Join Microsoft Teams and Zoom calls using Airtame Hybrid, with Google Meet and Webex support coming soon.


The included hardware, the Airtame Hub, includes HDMI, Ethernet (PoE+ supported), and USB ports. The Airtame Hub is tamper-proof and Kensington lock-compatible, ensuring setup integrity. Use USB peripherals like cameras, speakers, and microphones. Mount the Hub on a wall or place it on a surface.

Manage software licenses in Airtame Cloud for remote management. Control calls, camera, and microphone settings from the Airtame App on your laptop. Join meetings from your Microsoft Outlook or Google Calendar without room invites. Allow others to share screens without joining calls, enabling quick collaboration with no audio feedback.


Software Specifications



Hybrid conferencing

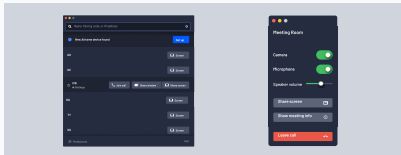


- Microsoft Teams Calls
- Zoom Calls
- Plug'n'play peripheral support
- Webex Calls coming soon
- Google Meet Calls coming soon
- Share to call

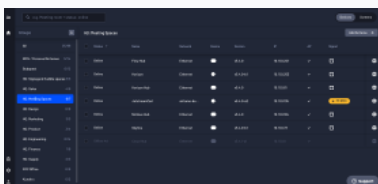


Remote management

- Access devices from anywhere in the world
- Scheduled power management
- Manual firmware updates
- Scheduled firmware updates
- Device Alert
- Edit name, network connectivity and basic security settings

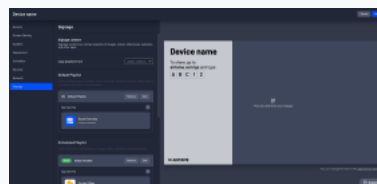

Digital signage

- Digital Signage playlist
- Digital Signage integrations
- Meeting room overview
- Welcome Screen with meeting room booking status
- Home Screen with custom icon and background
- Public website URL

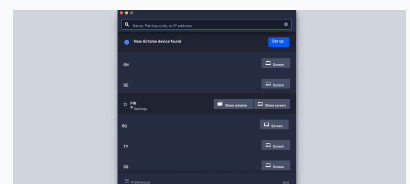

Screen sharing

- Share windows or whole screen
- Native protocols (Miracast, AirPlay, Google Cast)
- Video and Audio sharing

Hardware Specifications

Model Number: AT-CD1

Interface

HDMI Out:	2
USB:	2x Type A, 1x Type C
Network:	10/100/1000 Ethernet
WiFi:	802.11a/b/g/n/ac, RSDB
Bluetooth:	5.2

Software

Operating System:	Airtame OS (Linux Based)
Device Management:	Airtame Cloud

Environment

Ambient Operating Temperature:	0 to 45 °C (32 to 113 °F)
Operating Altitude:	0 - 2000 MSL

Warranty

EU:	2 year - Hardware
NA:	1 year- Hardware

Power Input

PoE IEEE 802.3st Type 2 PoE+ (RJ45 Connector)
42.5-57V - max 30W
DC Power Port (IEC 60120-10:1971 Type A: 5.5mm OD 2.1mm ID)
12v - max 30W

Security

Web/Cloud Transport Encryption:	TLS
Device APU Security:	With password (SRP)
Streaming Encryption:	AirPlay, Miracast
Conferencing Encryption:	TLS, WebRTC
Physical Security:	Custom Tamperproofing, Kensington lock compatible








Device Dimensions

Height:	56.4 mm (2.22 in)
Width:	159.5 mm (6.28 in)
Depth:	227.5 mm (8.96 in)

Box Dimensions

Height:	317 mm (12.5 in)
Width:	191 mm (7.5 in)
Depth:	63 mm (2.5 in)

What's in the box

Airtame Hub	HDMI cable (1m/y)	Mouting Plate	Wall screws	Wall plugs	3M Command Strips	User Manual
						

Airtame Power Adapter is sold separately

Accessories