




## THRU-THE-WALL AIR CONDITIONERS – 8,000 / 10,000 / 12,000 / 14,000 BTUs




	2ATW8000A	2ATW10000A	2ATW10002A
UPC	853057008990	853057008945	853057008952
POWER SUPPLY (V)	115	115	230
COOLING CAPACITY (BTU)	8,000	10,000	10,000
COVERAGE (SQ. FT.)	350	450	450
CEER	10.6	10.6	10.6
ENERGY STAR RATED	No	No	No
FAN SPEEDS (COOL/FAN)	3/3	3/3	3/3
AMPS	6.9	8.3	4.5
WATTS	755	940	940
REMOTE	Yes	Yes	Yes
UNIT DIMENSIONS (WxHxD) (IN.)	24 <sup>1</sup> / <sub>4</sub> x 14 <sup>1</sup> / <sub>2</sub> x 20 <sup>1</sup> / <sub>4</sub>	24 <sup>1</sup> / <sub>4</sub> x 14 <sup>1</sup> / <sub>2</sub> x 20 <sup>1</sup> / <sub>4</sub>	24 <sup>1</sup> / <sub>4</sub> x 14 <sup>1</sup> / <sub>2</sub> x 20 <sup>1</sup> / <sub>4</sub>
PKG. DIMENSIONS (WxHxD) (IN.)	27 <sup>3</sup> / <sub>4</sub> x 18 <sup>1</sup> / <sub>2</sub> x 27	27 <sup>3</sup> / <sub>4</sub> x 18 <sup>1</sup> / <sub>2</sub> x 27	27 <sup>3</sup> / <sub>4</sub> x 18 <sup>1</sup> / <sub>2</sub> x 27
STUFFING QTY. (20'/40'/40' HQ)	120/204/255	120/204/255	120/204/255
WEIGHT (NET/GROSS) (LBS.)	64/78	74/87	74/87
REFRIGERANT	R410A	R410A	R410A
OUTLET CONFIGURATION	 15 AMP 115V	 15 AMP 115V	 15 AMP 230V



### 2ATW8000A 2ATW10000A / 2ATW10002A

- Temperature output range of 61°F-88°F (16°C-31°C)
- 3-speed fan and fan-only mode
- Auto, sleep, dry, and eco modes
- Tilt out, removable & washable filter
- Electronic controls with LED display
- 4-way air direction
- 24-hour timer
- Remote Control (batteries included)
- Fits Standard Wall Sleeve: 26 x 15<sup>3</sup>/<sub>4</sub> x 16<sup>3</sup>/<sub>4</sub> (Sold Separately)
- ISTA 6A packaging



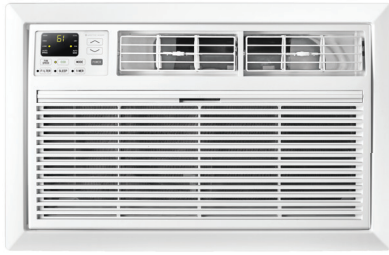




## 2ATW12000A / 2ATW12002A / 2ATW14002A

- Temperature output range of 61°F-88°F (16°C-31°C)
- 3-speed fan and fan-only mode
- Auto, sleep, dry, and eco modes
- Tilt out, removable & washable filter
- Electronic controls with LED display
- 4-way air direction
- 24-hour timer
- Remote Control (batteries included)
- Fits Standard Wall Sleeve: 26 x 15<sup>3/4</sup> x 16<sup>3/4</sup> (Sold Separately)
- ISTA 6A packaging



	2ATW12000A	2ATW12002A	2ATW14002A
<b>UPC</b>	853057008969	853057008976	853057008983
<b>POWER SUPPLY (V)</b>	115	230	230
<b>COOLING CAPACITY (BTU)</b>	12,000	12,000	14,000
<b>COVERAGE (SQ. FT.)</b>	550	550	650
<b>CEER</b>	10.1	5.1	6.7
<b>ENERGY STAR RATED</b>	No	No	No
<b>FAN SPEEDS (COOL/FAN)</b>	3 cool/3 fan	3 cool/3 fan	3 cool/3 fan
<b>AMPS</b>	9.4	10.3	7.7/8.3
<b>WATTS</b>	1,130	1,130	1,490
<b>REMOTE</b>	Yes	Yes	Yes
<b>UNIT DIMENSIONS (WxHxD) (IN.)</b>	24 <sup>1/4</sup> x 14 <sup>1/2</sup> x 20 <sup>1/4</sup>	24 <sup>1/4</sup> x 14 <sup>1/2</sup> x 20 <sup>1/4</sup>	24 <sup>1/4</sup> x 14 <sup>1/2</sup> x 20 <sup>1/4</sup>
<b>PKG. DIMENSIONS (WxHxD) (IN.)</b>	27 <sup>3/4</sup> x 18 <sup>1/2</sup> x 27	27 <sup>3/4</sup> x 18 <sup>1/2</sup> x 27	27 <sup>3/4</sup> x 18 <sup>1/2</sup> x 27
<b>STUFFING QTY. (20'/40'/40' HQ)</b>	120/204/255	120/204/255	120/204/255
<b>WEIGHT (NET/GROSS) (LBS.)</b>	75/89	75/89	75/90
<b>REFRIGERANT</b>	R410A	R410A	R410A
<b>OUTLET CONFIGURATION</b>	 15 AMP 115V	 15 AMP 230V	 15 AMP 230V