




ACCESSORY PANELS FOR EQUIPMENT CABINETS & CONSOLES


Security Panels, Solid Panels
Cabinet & Console Panels
Louvered Panels
Perforated Panels

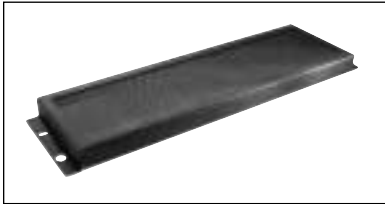


SEC Series




CB Series Panels

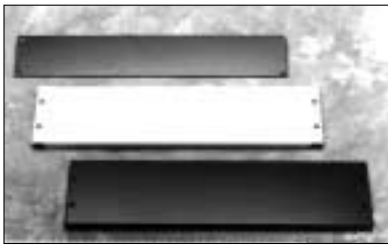

A19 Series
S19 Series
S219 Series



S19 Series
(Recessed)



S219 Series
(Flush)

FEATURES

- Atlas Sound Panels Provide Aesthetic Continuity and Security for Unfilled Cabinet Spaces
- Solid, Perforated, Louvered and Security Cover Models Offer Dust Protection and Meet Heat Ventilation Requirements
- Offered in a Variety of Panel Space Heights to Fit Most Cabinet Openings
- All Models Include Oblong Mounting Holes on E.I.A. Universal Spacing for Adjustment Flexibility
- Stocked in Textured Black Epoxy

SEC Series Security Covers. Designed to eliminate unauthorized operator tampering to rack mount equipment such as equalizers and rack mount mixers. 22-gauge construction features fine perforated steel insert for good visibility. Unique radiused corners provide a professional looking installation. Formed edges protect equipment from scratches. Available in 1U to 3U heights.

PANEL SPACE	DEPTH	RACK UNIT	MODELS FOR 19" W CABINETS	WEIGHT
1¾" (44mm)	1.06	1	SEC19-1-052	0.9
3½" (89mm)	1.06	2	SEC19-3-052	1.2
5¼" (133mm)	1.06	3	SEC19-5-052	1.3

BLANK PANELS

CB Series. Economy solid steel panels are constructed of #14 steel finished in attractive -052 flat black electrostatic powdercoat.

PANEL SPACE	DEPTH	RACK UNIT	MODELS FOR 19" W CABINETS	WEIGHT
1¾" (44mm)	.625	1	CB19-1-052	1
3½" (89mm)	.625	2	CB19-3-052	2
5¼" (133mm)	.625	3	CB19-5-052	2.5
7" (178mm)	.625	4	CB19-7-052	3

ALUMINUM BLANK PANELS

A19 Series. Solid aluminum panels for 19" wide electronic equipment cabinets are constructed of ¼" (3mm) thick aluminum.

PANEL SPACE	DEPTH	RACK UNIT	MODELS FOR 19" W CABINETS	WEIGHT
8¾" (222mm)	.625	5	A19-8-052	2.3
10½" (267mm)	.625	6	A19-10-052	2.7
12¼" (311mm)	.625	7	A19-12-052	3.0
14" (356mm)	.625	8	A19-14-052	3.4

STEEL BLANK PANELS

S19/S219 Series. Solid 16-gauge CRS panels (¼" thick) are available in recessed and flush mounting models, respectively. The S19 Series has formed returns on panel top and bottom for recessed installation. The S219 Series models are formed on all four sides for a flush appearance with respect to cabinet surface.

PANEL SPACE	DEPTH	RACK UNIT	MODELS FOR 19" W CABINETS		WEIGHT
			RECESSED	FLUSH	
1¾" (44mm)	.625	1	S19-1-052	S219-1-962	1.0
3½" (89mm)	.625	2	S19-3-052	S219-3-962	1.7
5¼" (133mm)	.625	3	S19-5-052	S219-5-962	2.2
7" (178mm)	.625	4	S19-7-052	S219-7-962	2.7
8¾" (222mm)	.625	5	S19-8-052	S219-8-962	3.2
10½" (267mm)	.625	6	S19-10-052	S219-10-962	3.8
12¼" (311mm)	.625	7	S19-12-052	S219-12-962	4.4
14" (356mm)	.625	8	S19-14-052	S219-14-962	5.0
19¼" (489mm)	.625	11	S219-19-052	-	6.5
21" (533mm)	.625	12	S219-21-052	-	7.6
22¾" (578mm)	.625	13	S219-22-052	-	8.0

* Note: S219, SVP219, and S219-L Series panels do not mount flush on 300/320/340 and 800 Series cabinets (panel protrudes ½"). Please specify A19 or S19 Series.

Specifications subject to change without notice




1601 JACK MCKAY BLVD. / ENNIS, TEXAS 75119 U.S.A.
TELEPHONE: (800) 876-3333 / FAX (800) 765-3435


AtlasSound.com



SVP19 Series
SVP219 Series
S219-8L

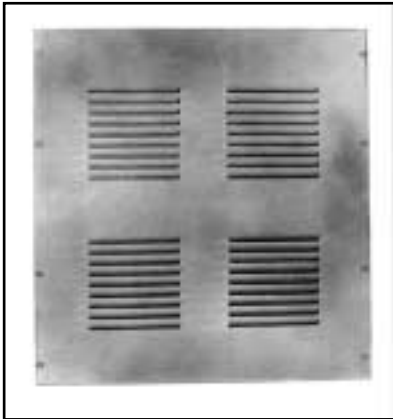

S219-21L

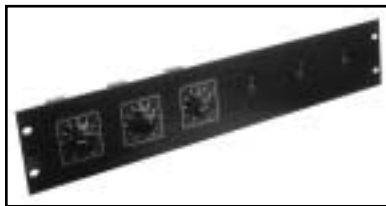

AT PLATE

PERFORATED VENT PANELS

SVP19/SVP219 Series. These 22-gauge CRS perforated panels provide for natural air circulation and dissipation of equipment-generated heat in 19" wide equipment cabinets. The SVP19 Series is formed on panel top and bottom for recessed installation. The SVP219 Series is formed on four sides to achieve flush appearance.

PANEL SPACE	DEPTH	RACK UNIT	MODELS FOR 19" W CABINETS		WEIGHT (lbs.)
			RECESSED	FLUSH	
1¾" (44mm)	.625	1	SVP19-1-052	SVP219-1-962	1
3½" (89mm)	.625	2	SVP19-3-052	SVP219-3-962	1
5¼" (133mm)	.625	3	SVP19-5-052	SVP219-5-962	2
7" (178mm)	.625	4	SVP19-7-052	SVP219-7-962	3
8¾" (222mm)	.625	5	SVP19-8-052	SVP219-8-962	4
10½" (267mm)	.625	6	SVP19-10-052	SVP219-10-962	4
12¼" (311mm)	.625	7	SVP19-12-052	SVP219-12-962	5

LOUVERED VENT PANELS

S219-L Series. Attractive CRS panels with internal louvers provide ventilation and heat dissipation for 19" wide electronic equipment installations. All panels are formed on four sides from 16-gauge CRS to form a flush panel installation and incorporate two or four sets of louvers according to panel size.

PANEL SPACE	DEPTH	RACK UNIT	MODELS FOR 19" W CABINETS	WEIGHT (lbs.)
7" (178mm)	.625	4	S219-7L-962	3
8¾" (222mm)	.625	5	S219-8L-962	4
10½" (267mm)	.625	6	S219-10L-962	4
14" (356mm)	.625	8	S219-14L-962	5
19¼" (489mm)	.625	11	S219-19L-962	7
21" (533mm)	.625	12	S219-21L-962	8
22¾" (578mm)	.625	13	S219-22L-962	8

ATPLATE-052. Atlas Sound ATPLATE is perfect for rack mount applications where attenuators are required. The Atlas Sound ATPLATE, a 2RU high #14 gauge plate pre-punched to accommodate up to (6) Atlas Sound RM attenuators. Attractive black filler plugs are provided for applications where the ATPLATE will not be fully loaded. Please note that dial scales are included with Atlas Sound RM series attenuators, however for convenience, (6) additional dial scales are included with the ATPLATE. This allows the contractor to stock only standard single gang plate Atlas Sound attenuators which can be modified for use with the ATPLATE by simply removing the single gang stainless steel plate. The ATPLATE is finished in flat black epoxy to better blend in with other rack mount equipment.

COLOR SUFFIX: -052 – Flat Black -962 – Crinkle Black

Specifications subject to change without notice



1601 JACK MCKAY BLVD. / ENNIS, TEXAS 75119 U.S.A.
TELEPHONE: (800) 876-3333 / FAX (800) 765-3435

AtlasSound.com