

RECIRCULATING KIT model HCREC5UC (Only for wall range hoods)

PACKAGING CONTENTS

- Air deflector
- Charcoal Filter
- 4 Assembly screws

INSTALLATION INSTRUCTIONS

- After the duct cover bracket has been installed on the ceiling (Refer to Installation Instructions in the Hood Manual), assemble the air deflector to the duct cover bracket with 4 assembly screws, as is shown in image 1.
- Measure from the bottom of the air deflector to the bottom of the hood outlet, as is shown in image 2. Cut the ductwork at the measured dimension.
- Uninstall the air deflector removing the 4 assembly screws.
- Slip the duct onto the bottom of the deflector.
- Place the assembled deflector and duct work over the exhaust outlet from the hood.
- Assemble the air deflector to the duct cover bracket, with the 4 assembly screws provided.
- Use duct tape to seal the deflector and the exhaust outlet from the hood, as is shown in the following image. The duct tape must be approved for this application. Image 3.

CHARCOAL FILTER INSTALLATION

- Remove the grease filter of the hood (a).
- Position the charcoal filter inside the structure of the motor as shown in picture b.
- Reinstall the grease filter onto the bottom of the hood (c).

FIG. 1

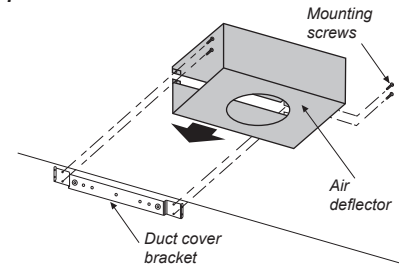


FIG. 2

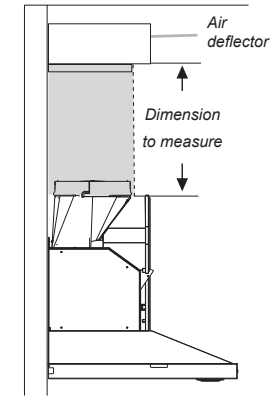


FIG. 3

