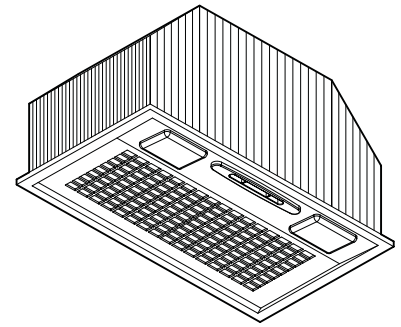# BROAN® NuTone®

MODEL PM390 POWER PACK

FEATURES

- Multi speed control
- Centrifugal blower, 390 CFM, 6.0 Sones
- 6" round duct connector/backdraft damper
- Enclosed light
- Accepts two incandescent max. 40-watt candelabra bulb (not included)
- One piece washable aluminum mesh filter
- Durable, powder coated silver finish
- Heat Sentry™ automatically turns blower to high speed when excess cooking heat is detected
- Fully enclosed bottom
- Power supply cord included
- One Year Limited Warranty
- Recommended for use with Models LB30, LB36, LT30, and LT36 Liners

OPTIONAL ACCESSORIES:
- Model 357NDK Non-ducted recirculating kit (includes charcoal filter, soffit grille, 90⁰ stack boot, and 6" to 7" round transition)
- Disposable charcoal filter kit - part no. B08999040

® 2100 HVI CERTIFIED

HVI-2100 CERTIFIED RATINGS comply with new testing technologies and procedures prescribed by the Home Ventilating Institute, for off-the-shelf products, as they are available to consumers. Product performance is rated at 0.1 in. static pressure, based on tests conducted in AMCA's state-of-the-art test laboratory. Sones are a measure of humanly-perceived loudness, based on laboratory measurements.
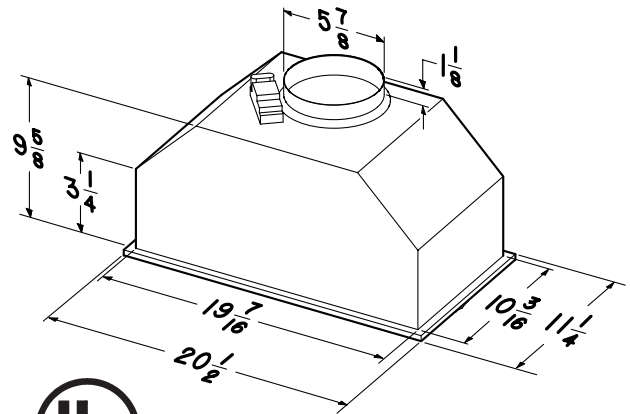
TYPICAL SPECIFICATION

Power Pack shall be Broan® (NuTone®) Model PM390.

Power Pack shall have a multi-speed fan switch and separate light switch.

Fan must be convertible between ducted and non-ducted discharge. Ducted mode uses a washable aluminum mesh filter. Non-ducted mode uses optional, disposable charcoal filter.

Unit shall have a durable, powder coated finish.

Air delivery to be at least 390 CFM and sound levels not greater than 6.0 Sones.

Unit shall be UL and cUL listed.

C ®UL US

REFERENCE	QTY.	REMARKS	
			Project
			Location
			Architect
			Engineer
			Contractor
			Submitted by Date