



## **Plenum 3.5mm Stereo M/M Cable**

- CMP-rated cable jacket that meets commercial in-wall codes
- Low profile RCA connectors (1-1/2" total depth) for easier in-wall installation
- Small-diameter cable (1/4" diameter) reduces space and clearance required for other cables in wall and in plenum air spaces
- 22AWG twisted pair
- Foil shield
- Lifetime Warranty

# Specifications: Plenum 3.5mm Stereo M/M Cable

## Electrical Characteristics:

### Twisted Pair

---

Capacitance: 45 pF/ft nom  
Conductor DC Resistance: 16-Ohms/kft nom  
(18.1-Ohms/kft max @ 20°C)

## Physical Characteristics:

Temperature Rating: 75°C

**Approvals:** RoHS Compliant

---

**Warranty:** Lifetime

---

**Package Type:** Polybag

---

| Item  | Description                 |
|-------|-----------------------------|
| 40515 | 15ft Plenum 3.5mm M/M Cable |
| 40516 | 25ft Plenum 3.5mm M/M Cable |
| 40517 | 35ft Plenum 3.5mm M/M Cable |
| 40518 | 50ft Plenum 3.5mm M/M Cable |
| 40522 | 75ft Plenum 3.5mm M/M Cable |

# Cable Specifications: Plenum 3.5mm Stereo M/M Cable

## Conductor (Qty. 2):

Conductor Type: 22AWG 7/30 tinned copper  
 .030" nom. OD

Drain Wire: 22 AWG 7TC



Insulation: Low Smoke PVC  
 .050" nom. OD  
 .010" avg. wall  
 (color code: (1) black, (1) red)

Shield: Foil  
 Aluminum/Polyester tape;  
 25% min. overlap

## Connector (Qty. 2):

Connector Type: 3.5mm Stereo Audio

Gender: Male to Male

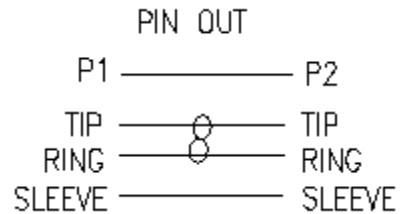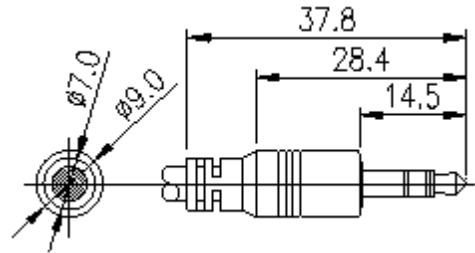

## Overall Cable:

Jacket: CMP-rated Low Smoke PVC  
 .134" nom. OD  
 .017" avg. wall  
 (color code: (1) black)

