

(Includes RSMA™ Mini Projector Mount)

FEATURES

LATERAL SHIFT

Dual stud design provides up to 10" (254 mm) of lateral shift for quick alignment.

PRECISION HEIGHT & LEVELING Industry-first micro height and leveling adjustment, ±3°.

FAST INSTALLATION Innovative quick-connect system.

VARIABLE EXTENSION OPTIONS Telescoping extension and infinite projector placement make it easy to achieve a picture perfect installation.

INTEGRATED CABLE MANAGEMENT Fully internal cable management system conceals and protects cables for a clean finish.

WHAT YOU NEED TO KNOW

ABOUT WM230S

For use with RSA, RPA, RSMA and RPMA projector mounts. For a complete solution order the kit (WM230AUS™). Kit includes one short throw wall mount accessory plus one RSMAUS projector mount (see page 7).

OTHER PRODUCT OPTIONS



WM210S™/WM210AUS™

Wall mount accessory / Kit

- Max. extension 12.75 19.5" (32.3 49.5 cm)
- Weight Cap. 50 lbs (22.7 kg)



WM220S™/WM220AUS™

Wall mount accessory / Kit

- Max. extension 17.5 30.25" (44.4 76.8 cm)
- Weight Cap. 25 lbs (11.3 kg)

	SPECIFICATIONS			
Extension		29.5 - 54.5"	,	


Extension	(74.9 - 138.4 cm)
Pitch	±3°
Lateral Shift	10" (254 mm)
Dimensions (HxWxD)	11.53 x 19.63 x 58.37" (29 x 50 x 148.3 cm)
Weight Capacity	25 lbs (11.3 kg)
Color	Silver

RECOMMENDED ACCESSORIES



WMAL24 = 24" (610 mm) Lateral Shift Accessory

TECHNICAL DRAWINGS

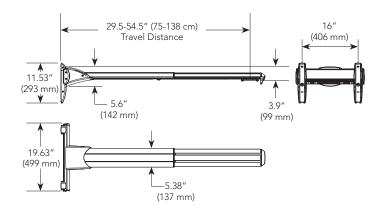

For a complete list of projector mount accessories see page 18.