

THE POWER OF **TRUE COMMERCIAL**

CROSSOVER 2.0 DRYER

Strength, durability, and performance are at the center of the newly refined Crossover 2.0 by Wascomat small chassis front load dryer. Built with professional grade components and loaded with powerful features, Crossover combines innovative technology, energy efficiency, and proven Wascomat reliability for optimal results every time.

KEY FEATURES

- **Commercial grade construction**
- Extra large load drum – 22+ pound capacity
- 7.0 cu. ft. drum
- **Drum supported by five roller bearings for long life**
- Fast drying
- **Axial airflow ensures the shortest drying time**
- Easy to clean, heavy duty lint screen
- **Extra large door opening for easy loading and unloading**
- Large capacity can handle oversized loads with ease
- Coin and card payment compatibility
- **Space-saving design**
- Easy to install
- Stacking kit available

DRYER
COIN/CARD & OPL



DRYER MODELS

AVAILABLE IN GAS OR ELECTRIC

GAS

MODEL No: Metered (Coin) – DLHF0817G

MODEL No: Card Ready – DLHF0817GDC

ELECTRIC

MODEL No: Metered (Coin) – DLHF0817E

MODEL No: Card Ready – DLHF0817EDC




CROSSOVER 2.0

DRYER
COIN/CARD & OPL

CROSSOVER 2.0 Dryer Specifications

| | |
|--|--|
| MODEL NO. GAS | Metered (Coin) / Card-ready DLHF0817G / DLHF0817GDC |
| MODEL NO. ELECTRIC | Metered (Coin) / Card-ready DLHF0817E / DLHF0817EDC |
| MOTOR | 1/3 HP |
| ELECTRICAL RATING (GAS MODEL) | 120 V/60 Hz / 1-phase |
| ELECTRICAL RATING (ELECTRIC MODEL) | 208 or 240V (heating)/120V (motor and controls) / 60hz / 1-phase |
| BREAKER FUSE REQUIREMENTS (GAS HEAT) | 15A |
| BREAKER FUSE REQUIREMENTS (ELECTRIC HEAT) | 30A |
| CYLINDER VOLUME | 7.0 cu ft (200 liters) |
| CYLINDER DIAMETER | 26 in (660 mm) |
| CYLINDER DEPTH | 22 in (559 mm) |
| CAPACITY (DRY WEIGHT) | 22 lbs (10 kg) |
| AIRFLOW | 170 cfm |
| GAS HEATING | 18,000 BTU/hr |
| ELECTRIC HEATING | 5.0 kW |
| GAS CONNECTION | 3/8 in MNPT |
| TUMBLING SPEED | 50 rpm |
| EXHAUST CONNECTION | 4 in diameter |
| APPROX. NET WEIGHT | 158 lbs (71.7 kg) |
| APPROX. SHIPPING WEIGHT | 173 lbs (78.5 kg) |

AXIAL AIRFLOW

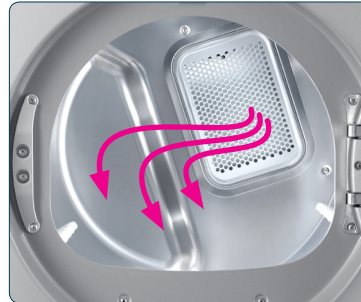

The highly efficient axial airflow system and tight construction results in extremely low energy usage and faster dry times.

ROLLER SUPPORTED TUMBLER



Innovative support rollers improve drum stability, ensure quiet operation, and extend the life of the machine.


TIME-OF-DAY PROMO PRICING



Crossover 2.0 dryers are easily programmable with promotional vend pricing at specified times and days. Multiple promotion events can be programmed at one time using the built-in real time clock.

CROSSOVER 2.0 Dryer Specs at a Glance

| | |
|-----------------------------|------------------------|
| DRY CAPACITY | 22 lb / 10 kg |
| CYLINDER VOLUME | 7.0 cu ft / 200 liters |
| A. OVERALL HEIGHT | 42 1/2 in (1080 mm) |
| B. HEIGHT TO CENTER OF DOOR | 23 in (584 mm) |
| C. HEIGHT TO BOTTOM OF DOOR | 12 in (305 mm) |
| D. OVERALL WIDTH | 27 in (686 mm) |
| E. OVERALL DEPTH | 29 in (737 mm) |
| F. DEPTH W/ DOOR OPEN 90° | 51 1/2 in (1308 mm) |

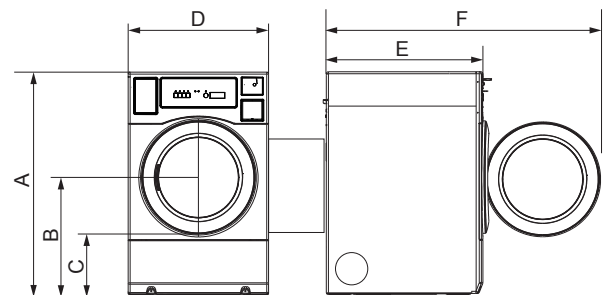

Refer installation and servicing to qualified, licensed personnel. Always read Installation and Operating Manuals and consult local codes before installation. Protect machines with properly rated circuit breakers ONLY. Warranty void if not properly installed.

Preliminary specifications: Specifications subject to change without notice. Laundrylux assumes no responsibility for errors or omissions in this information.

Money boxes and coin meter sold separately.