


# INSTALLING THE FACEPLATE FOR ON-PRMISE LAUNDRY

## STEP 1

Remove the cover plate(s) from machine's drum (all plates ship in the drum in protective plastic).

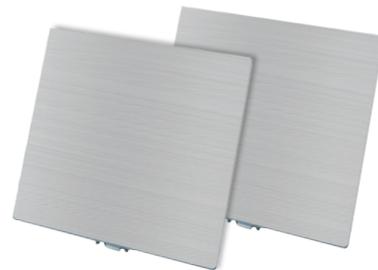

## STEP 2

Ensure faceplate(s) is facing the correct direction to avoid a misalignment and secure it in place.



\*note: misalignment of the plate will NOT affect the operation of the machine, but will cause the unit to look unfinished



## STEP 3

Once the faceplate is installed, it cannot be taken out without breaking it.

