


3.3/3.8kW 208/240V Single-Phase Basic PDU - 32 C13 & 6 C19 Outlets, L6-20P Input, 10 ft. Cord, 63.75 in. 0U Rack

MODEL NUMBER: PDUV20HVL6-72

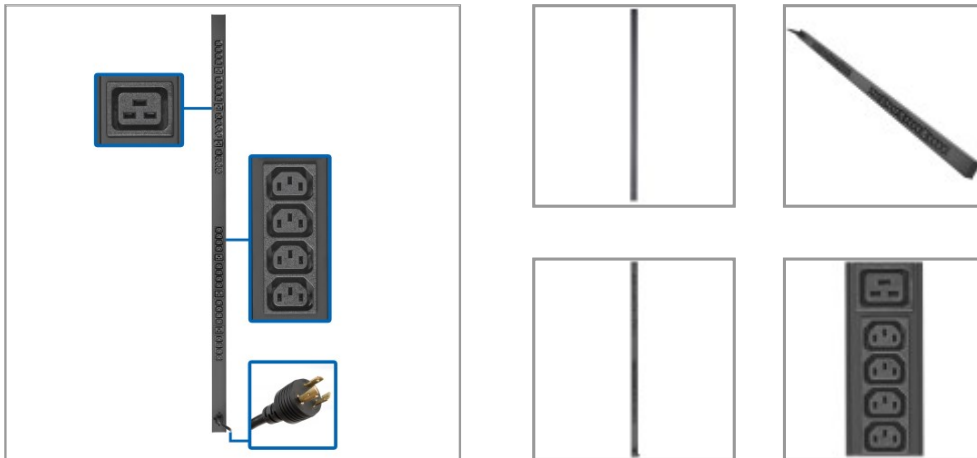

Delivers 208/240V single-phase AC power to multiple loads from a utility outlet, generator or UPS system in a data center or network closet.

Features

Single-Phase 208/240V PDU Distributes Network-Grade Power to Multiple Loads

This basic PDU is an ideal no-frills unit for networking, telecom, security, audio/video and sound reinforcement applications. Recommended for small to mid-sized data centers, computer rooms and network closets, the PDUV20HVL6-72 features 32 C13 and six C19 outlets for connecting equipment. A 10-foot cord with NEMA L6-20P input plug connects to your facility's AC power source, generator or protected UPS system to distribute power to connected loads. The switchless design helps prevent an accidental shutdown, which could lead to costly downtime.

Versatile Installation Options Give You Plenty of Choices

The 63.75-inch all-metal housing supports 0U vertical mounting in an EIA-standard 19-inch rack using the included toolless mounting buttons or the included mounting clips and hardware. You may also use the clips to secure the PDU to a wall, counter or other flat, secure surface. Included C20 and C14 plug-lock inserts attach to the connected components' plugs to keep them connected and the devices continuously powered.

Highlights

- Ideal no-frills PDU for telecom, security, audio/video and other network applications
- 32 C13 and 6 C19 outlets distribute AC power to connected equipment
- Switchless design helps prevent accidental shutdowns that can lead to costly downtime
- 10 ft. cord with NEMA L6-20P single-phase input connects to compatible power source
- 63.75 in. 0U PDU with included mounting hardware installs in rack or under counter

Applications

Deliver network-grade power to high-density equipment in networking, telecom, security, audio/video and sound reinforcement applications

Package Includes

- PDUV20HVL6-72 3.3/3.8kW 208/240V Single-Phase Basic PDU
- (38) Plug-lock inserts
- Mounting hardware
- Owner's manual

Specifications

| OVERVIEW | |
|-------------------|---------------|
| UPC Code | 037332255945 |
| PDU Type | Basic |
| INPUT | |
| PDU Input Voltage | 200; 208; 240 |



| | |
|--|---|
| Recommended Electrical Service | 20A 208/240V |
| Maximum Input Amps | 20 |
| Maximum Input Amps Details | Agency de-rated to16A |
| PDU Plug Type | NEMA L6-20P |
| Input Phase | Single-Phase |
| Input Cord Length (ft.) | 10 |
| Input Cord Length (m) | 3.05 |
| OUTPUT | |
| Output Capacity Details | 3.84kW (240V), 3.33kW (208V), 3.2kW (200V) / 20A total capacity (Agency de-rated 16A); 16A max per C19 outlet; 12A max per C13 outlet |
| Frequency Compatibility | 50 / 60 Hz |
| Output Receptacles | (32) C13; (6) C19 |
| Output Nominal Voltage | 200; 208; 240 |
| USER INTERFACE, ALERTS & CONTROLS | |
| Switches | n/a |
| PHYSICAL | |
| Form Factors Supported | 0u vertical installation in equipment racks, plus under-counter and wallmount |
| Material of Construction | Metal |
| PDU Form Factor | Vertical (0U) |
| Shipping Dimensions (hwd / in.) | 5.00 x 3.00 x 65.50 |
| Shipping Weight (kg) | 4.90 |
| Unit Dimensions (hwd / cm) | 162 x 5.7 x 9.5 |
| Unit Dimensions (hwd / in.) | 63.75 x 2.25 x 3.75 |
| Unit Weight (kg) | 3.63 |
| Unit Weight (lbs.) | 8 |
| ENVIRONMENTAL | |
| Storage Temperature Range | -30°C to +50°C (-22°F to +122°F) |
| Relative Humidity | 5-95% non-condensing |
| Operating Elevation (ft.) | 0-10,000 |
| Operating Elevation (m) | 0-3000 |
| STANDARDS & COMPLIANCE | |
| Certifications | Tested to UL60950-1 (USA, Canada), NOM (Mexico) |



Tripp Lite
1111 W. 35th Street
Chicago, IL 60609 USA
Telephone: 773.869.1234
www.tripplite.com

| | |
|-------------------------------------|---|
| Certification Details | Series Number (s) AGIB6672; Safety Standards (Canada) CAN/CSA-C22.2 No. 60950-1:2007 (2nd Ed) +A1:2011 +A2:2014; Safety Standards (U.S.) UL60950-1:2007 (2nd Ed)+A1 R10.14; Safety Standards (International) IEC60950-1:2005 (2nd Ed)+A1:2009+A2:2013 |
| WARRANTY | |
| Product Warranty Period (Worldwide) | 5-year limited warranty |

© 2021 Tripp Lite. All rights reserved. All product and company names are trademarks or registered trademarks of their respective holders. Use of them does not imply any affiliation with or endorsement by them. Tripp Lite has a policy of continuous improvement. Specifications are subject to change without notice. Tripp Lite uses primary and third-party agencies to test its products for compliance with standards. See a list of Tripp Lite's testing agencies: <https://www.tripplite.com/products/product-certification-agencies>