

FURMAN**P-2400 AR****PRESTIGE SERIES**
VOLTAGE REGULATOR/POWER CONDITIONER

The 20 amp P-2400 AR delivers a stable 120 volts of AC power to protect equipment from problems caused by AC line voltage irregularities such as sags, brownouts, or overvoltages - all of which can cause sensitive electronic equipment to malfunction or sustain damage. The P-2400 AR accepts input voltage between 97V-137V and transforms it to a constant output of 120V, $\pm 5V$. Voltages beyond that range may also be converted to usable levels, depending on the range variance. With its robust 20A capacity, the P-2400 AR is ideal for high-current equipment such as power amplifiers or powering A/V racks in large installations.

Additionally, the P-2400 AR is a full-featured power conditioner that filters and purifies AC power, reducing line noise and ensuring optimum performance. Not only will your equipment perform better with Furman's Linear Filtering Technology (LiFT), but it will also be fully protected by our exclusive Series Multi-Stage Protection (SMP) and Extreme Voltage Shutdown (EVS). This circuitry provides the highest level of power protection available.



Furman's exclusive SMP Technology provides the highest level of surge & spike protection available



LiFT offers linear AC power filtering to ensure clean power for unequaled audio & video clarity



Advanced EVS circuitry detects dangerous voltage irregularities and safely powers down itself and connected equipment in unsafe conditions



True RMS Voltage Regulation delivers a stable 120 volts of AC power to protect equipment from problems caused by AC line voltage irregularities



Large LED voltmeter/ammeter displays incoming voltage and input current draw



Protection OK, Extreme Voltage and color-coded voltage range indicators provide information on power quality and operational status of unit



Front panel USB convenience outlet allows you to charge most media devices or power a USB lamp



Isolated outlet banks minimize inter-component interference and noise contamination



20 amp rating featuring a high inrush magnetic circuit breaker for added protection



Fourteen total outlets (Twelve rear panel outlets and two front panel convenience outlets)



SMP (Series Multi-Stage Protection)

Audio/Video professionals can never accept down time, corrupted data, or unreliability. It is for this reason that a virtually non-sacrificial transient voltage surge suppression systems, such as SMP, is the best choice for critical applications. With Furman's SMP, there is zero downtime. In fact, these circuits can typically handle multiple 6000 volts or 3000 amp pulses without sustaining any damage.



LiFT (Linear Filtering Technology)

With Furman's LiFT, differential AC noise is reduced linearly, across a very wide bandwidth, even extending into the video frequencies. This results in a lower noise floor for you audio system, improved picture on your video display, and protection from possible data corruption and losses caused by low-level differential AC noise fed into digital systems.





EVS (Extreme Voltage Shutdown)

Furman's EVS constantly monitors incoming voltage, and once any overvoltage condition over 145 volts AC is detected, a relay opens which immediately shuts down the unit and all connected equipment. An indicator light informs the user there is a problem, and once the condition has been corrected, the unit may be reset and will operate normally.



True RMS Voltage Regulation

Designed specifically for A/V equipment, True RMS Voltage Regulation provides stable output voltage by utilizing a microprocessor controlled, ultra-low noise toroidal autoformer. Unlike most commercial regulators, Furman's True RMS Voltage Regulation utilizes solid-state switching for virtually silent regulation without injecting noise onto the AC line.

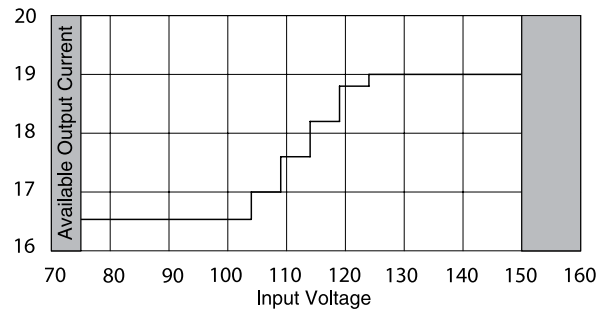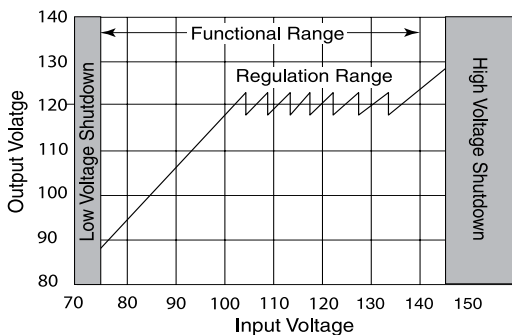

SPECIFICATIONS

MAXIMUM CURRENT:

20 AMPS
(De-rate 170mA/V for inputs less than 120VAC)

LINE CORD:

CAPTIVE 3/12 AWG, 10 FT, BLACK CORD WITH NEMA 20 PLUG

RECEPTACLES:

TWO FRONT PANEL 20A NEMA5-20R OUTLETS AND TWELVE REAR PANEL 20A NEMA5-20R OUTLETS

OPERATING VOLTAGE:

90 TO 139 VAC

OVER VOLTAGE SHUTDOWN:

145 VAC NOMINAL

IN REGULATION RANGE:

97 TO 137 VAC

SPIKE PROTECTION MODES:

LINE TO NEUTRAL, ZERO GROUND LEAKAGE

SPIKE CLAMPING VOLTAGE:

188 V PEAK @ 3,000 AMPS

RESPONSE TIME:

1 NANOSECOND

MAXIMUM SURGE CURRENT:

6,500 AMPS

NOISE ATTENUATION:

10 DB @ 10KHZ, 40 DB @ 100 KHZ, 50 DB @ 500KHZ

DIMENSIONS:

19" W X 12" D X 3.50" H (483MM W X 305MM D X 89MM H)

WEIGHT:

39 LBS. (18 KG.)

POWER CONSUMPTION (NO LOAD):

13 WATTS

