

### INSTALLATION

Installation and service must be conducted by qualified / licensed technician, in accordance with national & local regulation. Failure to comply will void the product warranty.

- Always disconnect the appliance power before installation & maintenance.
- These cooktops are designed to be dropped into counter top measuring >24 inches in depth.
- Please use the "Cutting size board" (cardboard packed in the box) to outline & cut hole in counter top.
- Minimum vertical clearances of 18 inches from top surface unit to side cabinets.
- Minimum horizontal distance(S) from sides and back of appliance to adjacent vertical combustible walls extending above the top panel, 6 inches from the left side, 6 inches from right side, 2 inches from rear wall.
- Minimum clearance to combustible construction centered above cooking surface: Vertical 30 inches, Horizontal 30 inches.
- The unit overhead cabinet maximum depth: 13 inches.  
Minimum Horizontal Distance from front edge of counter to front side of appliance, 1 inch.

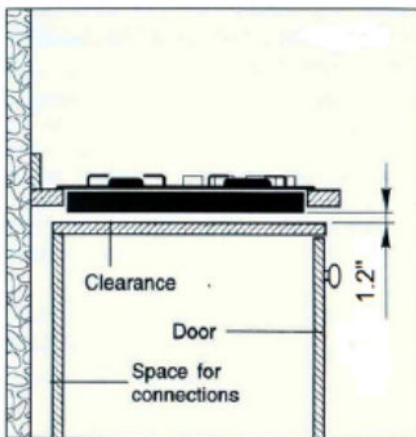
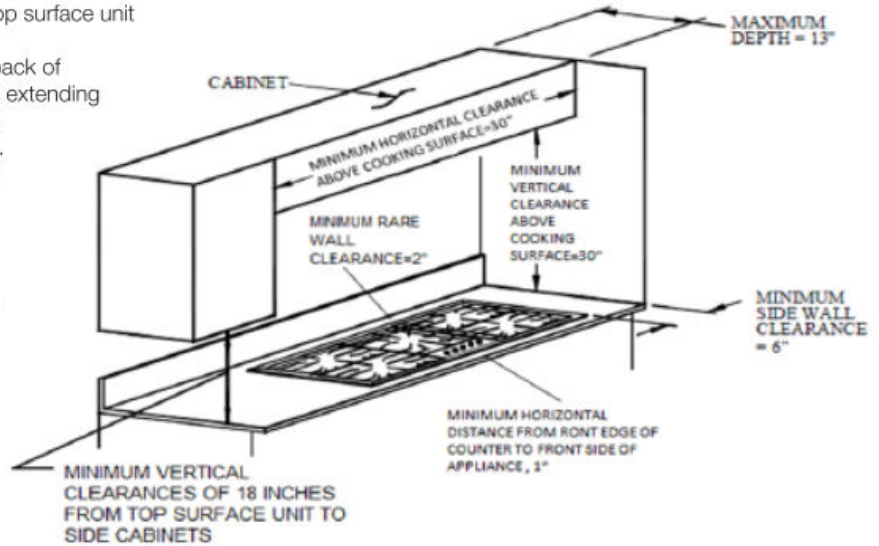


Fig.4

**Note:** The adjacent furniture and all materials used in installation must be able to withstand a minimum of 185°F above the ambient temperature. However certain types of vinyl or laminate kitchen furniture are particularly prone to heat damage or discoloration at temperatures below 185°F.

### CONNECT THE COOKTOP TO GAS

Shut off the main gas supply valve before disconnecting the old cooktop and leave it off until the new hook-up has been completed.

Don't forget to relight the pilot on other gas appliances when you turn the gas back on.

Never use an old connector when installing a new cooktop.

