


Professional Series

Key Features:


- Accessory tile rail for installing many of JBL's ceiling loudspeakers into 4 ft by 4 ft (1200 x 1200 mm; 48 x 48 inch) ceiling tiles in suspended ceiling applications.
- Can be used with any JBL ceiling speakers having the *C-ring/tile-rail* mounting system. Includes (at product release):
 - Control 24C/CT Micro & 24CT MicroPlus
 - Control 24C/CT, 26C/CT, 19CS/CST
 - Control 47C/T, 47LP, 47HC, 40CS/T, 42C
 - Control 226C/T
 - 8124/8128
 - Not for JBL speakers that install with tile bridges (such as CSS Series, 8138, C227C/CT, C300 Series models). Check with JBL Professional Customer Service for most up-to-date compatibility list.
- Inverted V-groove provides support to the tile rail grid in case of tile failure while reducing vibration transfer to – and rattling from – ceiling tile grid system.
- 1.2 mm (0.05 in) metal thickness provides the additional support required by the long span.
- Multiple C-ring mounting holes. Additional hole locations drillable by installer.
- One MTC-48TRx12 is a pack of 12 tile rails, enough for 6 speakers (2 per speaker).

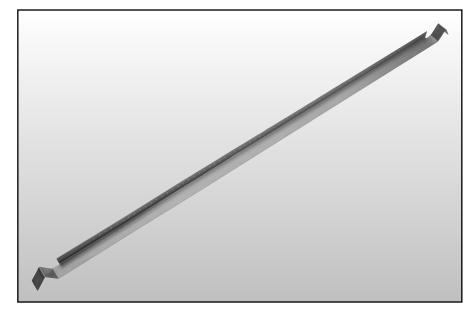

Specifications:

Material:	1.2 mm (0.05 in, 18 gauge) galvanized steel, SECC.
C-Ring Mounting Holes:	30 holes; additional hole locations drillable by installer.
Dimensions:	27 mm (1.1 in) tall x 30 mm (1.2 in) wide x 1267 mm (49.9 in)
	total length to extend beyond tile grids. 1219 mm (48.0 in)
	between top of inverted v-grooves, to line up with tile grids.

JBL continually engages in research related to product improvement. Changes introduced into existing products without notice are an expression of that philosophy.

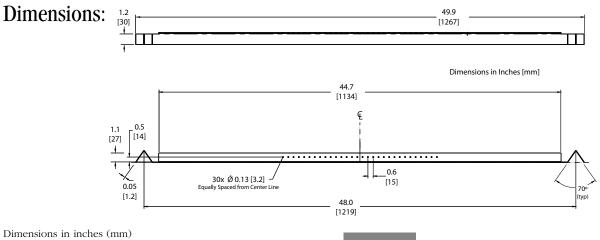



JBL Professional 8500 Balboa Boulevard, P.O. Box 2200 Northridge, California 91329 U.S.A. © Copyright 2012 JBL Professional www.jblpro.com