


COMMERCIAL

Refrigeration Equipment Bottle Cooler with Slide Top, 19 cu.ft, 65" (R600a)

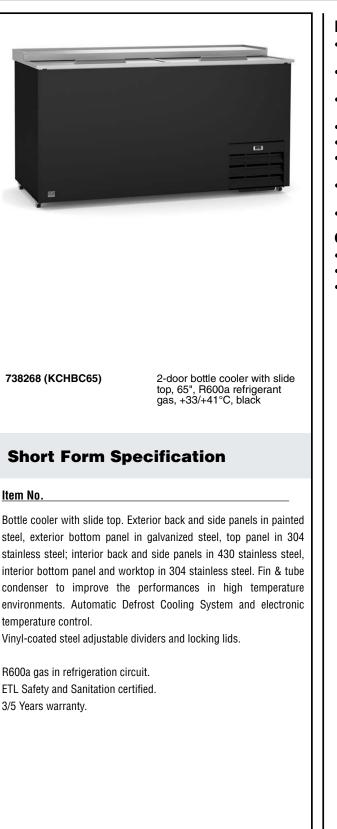

	X
ITEM #	Ž
MODEL #	
NAME #	بر
SIS #	F
AIA #	

Main Features

- Fin & Tube Condenser improves performance in high temperature environments.
- Automatic Defrost Cooling System provides worry-free performance.
- Vinyl-Coated Steel adjustable dividers to customize bottle storage effortlessly.
- Locking doors.
- External temperature display.
- High efficiency components to minimize the energy consumption still guaranteeing the highest performances.
- Cabinet and door insulated with high density polyurethane for low environmetal impact.
- Locking lids.

Construction

- CFC and HCFC free (ecological refrigerant type: R600a).
- Pre-wired heavy duty power cord.
- Electronic control to select temperatures.



Refrigeration Equipment Bottle Cooler with Slide Top, 19 cu.ft, 65'' (R600a)

Electric	
Supply voltage: 738268 (KCHBC65) Electrical power, max: Current consumption: Plug type:	115 V/1 ph/60 Hz 0.3 kW 3 Amps USA NEMA 5-15P
Capacity:	
Gross capacity:	19 cu.feet
Key Information:	
External dimensions, Width: External dimensions, Depth: External dimensions, Height: Internal Dimensions (depth): Internal Dimensions (height): Internal Dimensions (width): Shipping height: Shipping weight: Shipping volume: Type of external material: Type of internal material: Warranty:	64 5/16" (1633 mm) 27 1/64" (725 mm) 35 " (888 mm) 26 1/16" 22 15/16" 60 3/8" 39 3/8" (1010 mm) 331 lbs (150 kg) 43.9 ft ³ (1.24 m ³) Black Prepainted Steel Stainless Steel 3 / 5 years
Refrigeration Data	
Compressor Horsepower: Refrigerant type: Refrigerant weight: Operating temperature min.: Operating temperature max.: Condenser type:	1/6 R600a 70 g 32 °F 41 °F Fin & tube
	Supply voltage: 738268 (KCHBC65) Electrical power, max: Current consumption: Plug type: Capacity: Key Information: External dimensions, Width: External dimensions, Depth: External dimensions, Height: Internal Dimensions (depth): Internal Dimensions (width): Shipping height: Shipping volume: Type of external material: Type of internal material: Warranty: Refrigeration Data Compressor Horsepower: Refrigerant weight: Operating temperature min.: Operating temperature max.:

64.3''–1633mm 11.4"-290mm 33.2"-844.5mm 35"-888mm Ħ 14<u>.6</u>" 28.5"-725mm <u>27''–687mm</u> <u>.7''–322m</u>m 12 ₩_____ 26.1"–663mm Ψ **EI** = Electrical connection **RI** = Refrigerant Inlet R0 = Refrigerant Outlet 613 8113 11.<u>1''-283m</u>m 30.2''-767mm 30.2"-767mm

15A 125V NEMA 5-15P

Intertek

Intertek

Refrigeration Equipment Bottle Cooler with Slide Top, 19 cu.ft, 65" (R600a)

The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.