COMMERCIAL

Refrigeration Equipment Mega Top Table, 60" with 4 drawers and 24GN1/6 containers - Stainless Steel (R290)

ITEM #
MODEL #
NAME #
SIS #
AIA #



738288 (KCHMT60.24.2D)

4-drawer mega top preparation table, 60", R290 refrigerant gas, +33/+41°F, stainless steel

Short Form Specification

Item No.

4-drawer mega top refrigerated preparation table. Exterior back panel in aluminum, exterior bottom panel in galvanized steel, exterior side and top panel in 430 stainless steel; interior back, top and interior bottom panels in 304 stainless steel, worktop in 430 stainless steel.

Built-in refrigeration unit and an insulated lid to maintain food freshness. Fin & Tube Condenser improves performance in high-temperature environments. Automatic Defrost Cooling System to provide worry-free performances.

Full-depth cutting board 61x9x0,5 in.

Control panel, Vinyl-Coated Steel adjustable shelves, removable door gaskets and self-closing doors with 90-degree stay-open feature.

Temperature range: +33/+41°F.

R290 gas in the refrigeration circuit.

ETL Safety and Sanitation certifications.

3/5 Years warranty.

Main Features

- Removable door gasket for easy cleaning operations.
- Hydrocarbon refrigerant gas R290 for the lowest environmental impact (GWP=3) CFC and HCFC free.
- Fin & Tube Condenser improves performance in high temperature environments.
- Automatic Defrost Cooling System provides worry-free performance.
- Electronic Temperature Control, quick and simple to set, with control display for easy monitoring.
- Full Depth cutting board.
- External temperature display.
- High efficiency components to minimize the energy consumption still guaranteeing the highest performances.
- Cabinet and door insulated with high density polyurethane for low environmetal impact.
- · Heavy duty Vinyl coated steel shelves.
- CFC and HCFC free, highly ecological refrigerant type: R290 (ecological gas in foam: cyclopentane). Hydrocarbon refrigerant gas R290 for the lowest environmental impact (GWP=3), to reduce green house and ozone depletion effects.

Construction


- · Self-closing door with 90-degree stay-open feature.
- Heavy duty casters.
- Insulated lid maintains food freshness.
- Pre-wired heavy duty power cord.
- · Heavy duty door hinges.
- Magnetic door gasket removable without tools for easy cleaning.

Optional Accessories


shelf for 60" mega top, salad and undercounter	PNC 880596 □
shelf clins	PNC 880611

APPROVAL:



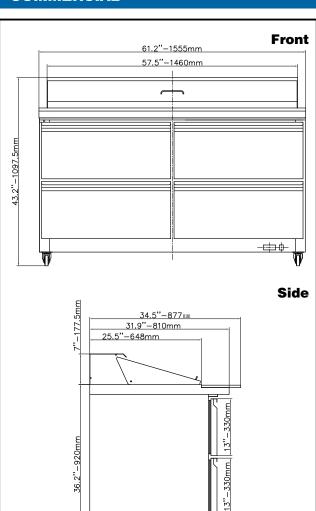

El = Electrical connection



G

Electric

Supply voltage:

738288 (KCHMT60.24.2D) 115 V/1 ph/60 Hz

Electrical power, max: 0.8 kW Current consumption: 7.5 Amps

Plug type: USA NEMA 5-15P

Capacity:

Gross capacity: 15.5 cu.feet

Key Information:

External dimensions, Width: 61 1/4" (1555 mm)
External dimensions, Depth: 34 1/2" (877 mm)
External dimensions, Height: 43 1/4" (1097.5 mm)

Number and type of doors:

Internal Dimensions (depth): 23 13/16"
Internal Dimensions (height): 23 1/2"
Internal Dimensions (width): 56 1/4"

Shipping height: $47 \ 1/4$ " (1200 mm)Shipping weight: $364 \ lbs (165 \ kg)$ Shipping volume: $58.8 \ ft^3 (1.67 \ m^3)$

Number and type of grids

(included): 1 - Vinyl-Coated Steel

Type of external material: Stainless Steel
Type of internal material: Polystyrene
Warranty: 3 / 5 years

Refrigeration Data

Compressor power:

Refrigerant type: R290
Refrigerant weight: 90 g
Operating temperature min.: 32 °F
Operating temperature max.: 41 °F
Condenser type: Fin & tube

Defrost type: Auto Defrost







