

**Refrigeration Equipment  
Pizza Preparation Table, 2 Door  
with 9GN 1/3 containers - Stainless  
Steel (R290)**

ITEM # \_\_\_\_\_

MODEL # \_\_\_\_\_

NAME # \_\_\_\_\_

SIS # \_\_\_\_\_

AIA # \_\_\_\_\_



738253 (KCHPT72.9)

2-door pizza preparation table, 72", R290 refrigerant gas, +33/+41°F, stainless steel

**Short Form Specification**

**Item No.** \_\_\_\_\_

2-door pizza refrigerated preparation table. Exterior back panel in aluminium, exterior bottom panel in galvanized steel, exterior side and top panel in 430 stainless steel; interior back, side panels and bottom panel in 304 stainless steel, worktop in 430 stainless steel.

Built-in refrigeration unit and an insulated lid to maintain food freshness. Fin & Tube Condenser improves performance in high-temperature environments. Automatic Defrost Cooling System to provide worry-free performances.

Full-depth cutting board of 79x70.79x19.53 in.

Control panel, Vinyl-Coated Steel adjustable shelves, removable door gaskets and self-closing doors with 90-degree stay-open feature.

Temperature range: +33/+41°F.

R290 gas in the refrigeration circuit.

ETL Safety and Sanitation certifications.

3/5 Years warranty.

**Main Features**

- External temperature display.
- CFC and HCFC free, highly ecological refrigerant type: R290 (ecological gas in foam: cyclopentane). Hydrocarbon refrigerant gas R290 for the lowest environmental impact (GWP=3), to reduce green house and ozone depletion effects.
- Removable door gasket for easy cleaning operations.
- Hydrocarbon refrigerant gas R290 for the lowest environmental impact (GWP=3) - CFC and HCFC free.
- Fin & Tube Condenser improves performance in high temperature environments.
- Electronic Temperature Control, quick and simple to set, with control display for easy monitoring.
- Full Depth cutting board.
- High efficiency components to minimize the energy consumption still guaranteeing the highest performances.
- Cabinet and door insulated with high density polyurethane for low environmental impact.
- Heavy duty Vinyl coated steel shelves.


**Construction**

- Heavy duty casters.
- Insulated lid maintains food freshness.
- Holds 9 1/3 pans.
- Pre-wired heavy duty power cord.
- Heavy duty door hinges.
- Magnetic door gasket removable without tools for easy cleaning.

**Optional Accessories**

- shelf for 72" pizza counter  PNC 880602
- shelf clips  PNC 880611

APPROVAL: \_\_\_\_\_

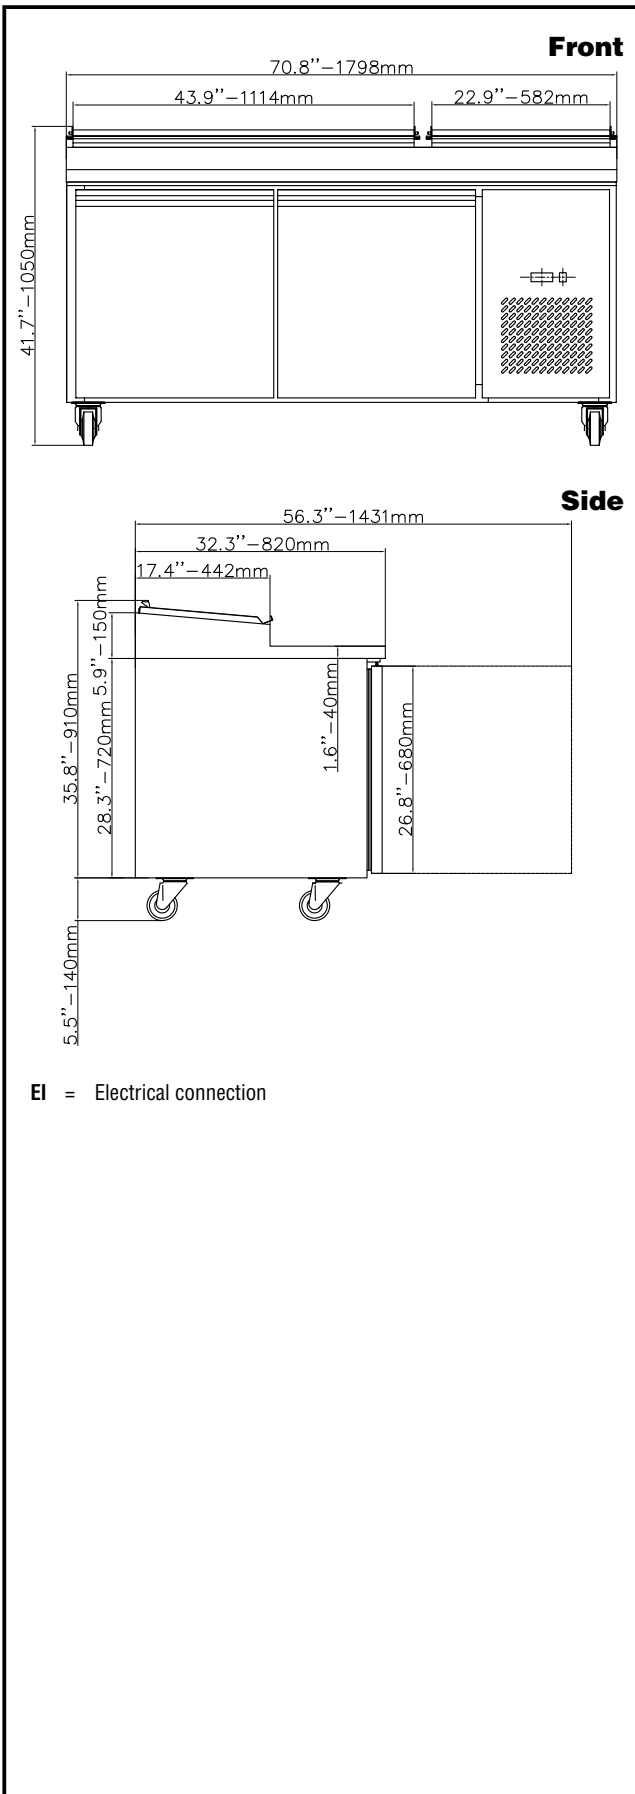

### Electric

<b>Supply voltage:</b>	
738253 (KCHPT2.9)	115 V/1 ph/60 Hz
<b>Electrical power, max:</b>	0.8 kW
<b>Current consumption:</b>	7.5 Amps
<b>Plug type:</b>	NEMA 5-15

### Capacity:

<b>Gross capacity:</b>	22 cu.feet
------------------------	------------

### Key Information:

<b>Door hinges:</b>	1 Left+1 Right
<b>External dimensions, Width:</b>	70 13/16" (1798 mm)
<b>External dimensions, Depth:</b>	32 1/4" (820 mm)
<b>External dimensions, Height:</b>	41 5/16" (1050 mm)
<b>Number and type of doors:</b>	2 Full
<b>Internal Dimensions (depth):</b>	22 13/16"
<b>Internal Dimensions (height):</b>	26 3/16"
<b>Internal Dimensions (width):</b>	48 7/16"
<b>Shipping height:</b>	44 1/2" (1130 mm)
<b>Shipping weight:</b>	434 lbs (197 kg)
<b>Shipping volume:</b>	63.65 ft <sup>3</sup> (1.8 m <sup>3</sup> )
<b>Type of grids (included):</b>	Vinyl-Coated steel
<b>Type of external material:</b>	Stainless Steel
<b>Type of internal material:</b>	304 AISI
<b>Warranty:</b>	3 / 5 years

### Refrigeration Data

<b>Compressor power:</b>	
<b>Refrigerant type:</b>	R290
<b>Refrigerant weight:</b>	105 g
<b>Operating temperature min.:</b>	32 °F
<b>Operating temperature max.:</b>	41 °F
<b>Condenser type:</b>	Fin & tube
<b>Defrost type:</b>	Auto Defrost

