

**Refrigeration Equipment
Reach-In Refrigerator, 2 Glass
Doors, 49 cu.ft - Stainless Steel
(R290)**

ITEM # _____

MODEL # _____

NAME # _____

SIS # _____

AIA # _____



738281 (KCHRI54R2GDR) 2-glass door reach-in refrigerator, stainless steel, 49 cubic feet, R290 refrigerant gas, +33/+41°F - Energy Star

Short Form Specification

Item No. _____

2 glass door refrigerator with exterior back and bottom panels in galvanized steel, exterior side and top panels in 430 stainless steel; interior back, side, top and bottom panels in 304 stainless steel.
Control with cabinet temperature display.

R290 gas in the refrigeration circuit.
ETL Safety and Sanitation certifications.
3/5 Years warranty.

Main Features

- External temperature display.
- Removable door gasket for easy cleaning operations.
- Hydrocarbon refrigerant gas R290 for the lowest environmental impact (GWP=3) - CFC and HCFC free.
- Fin & Tube Condenser improves performance in high temperature environments.
- Automatic Defrost Cooling System provides worry-free performance.
- Electronic Temperature Control, quick and simple to set, with control display for easy monitoring.
- Heavy duty Vinyl coated steel shelves.
- High efficiency components to minimize the energy consumption still guaranteeing the highest performances.
- Cabinet and door insulated with high density polyurethane for low environmental impact.
- Bottom mounted cooling unit slides out for easy access and cleaning.
- CFC and HCFC free, highly ecological refrigerant type: R290 (ecological gas in foam: cyclopentane). Hydrocarbon refrigerant gas R290 for the lowest environmental impact (GWP=3), to reduce green house and ozone depletion effects.
- Interior LED light to save energy and for best internal visibility.


Construction

- Stainless steel interior and exterior, durable and easy to clean for daily commercial use.
- Self-closing door with 90-degree stay-open feature.
- Heavy duty casters.
- Lockable door.
- Pre-wired heavy duty power cord.
- Heavy duty door hinges.
- Magnetic door gasket removable without tools for easy cleaning.

Optional Accessories

- shelf for 54" and 81" (left/right) reach-in PNC 880591
- shelf clips PNC 880611

APPROVAL: _____

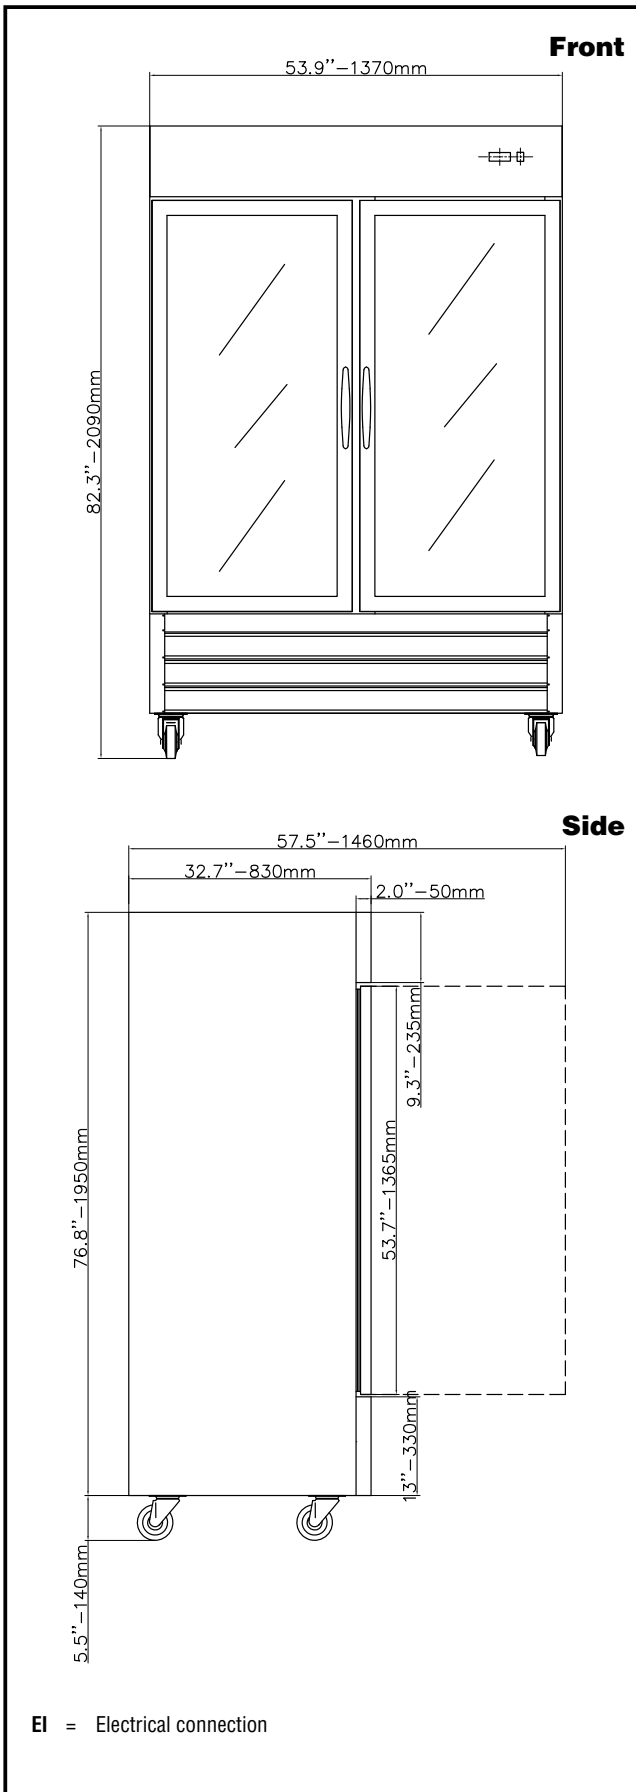

Electric

| | | |
|-------------------------------|-----------------------|------------------|
| Supply voltage: | 738281 (KCHRI54R2GDR) | 115 V/1 ph/60 Hz |
| Electrical power, max: | | 0.5 kW |
| Current consumption: | | 4.5 Amps |
| Plug type: | | USA NEMA 5-15P |

Key Information:

| | |
|---|--|
| Capacity (Cu. Ft.) | 49 |
| Door hinges: | Right Side |
| External dimensions, Width: | 53 7/8" (1370 mm) |
| External dimensions, Depth: | 32 11/16" (830 mm) |
| External dimensions, Height: | 82 1/4" (2090 mm) |
| Number and type of doors: | 2 Glass |
| Internal Dimensions (depth): | 27 1/16" |
| Internal Dimensions (height): | 60 1/4" |
| Internal Dimensions (width): | 24 7/16" |
| Shipping height: | 84 5/8" (2150 mm) |
| Shipping weight: | 562 lbs (255 kg) |
| Shipping volume: | 92.27 ft ³ (2.61 m ³) |
| Number and type of grids (included): | 8 - Vinyl-Coated steel |
| Type of external material: | 430 AISI |
| Type of internal material: | 304 AISI |
| Warranty: | 3 / 5 years |

Refrigeration Data

| | |
|------------------------------------|--------------|
| Compressor Horsepower: | 1/6 |
| Refrigerant type: | R290 |
| Refrigerant weight: | 105 g |
| Operating temperature min.: | 32 °F |
| Operating temperature max.: | 41 °F |
| Condenser type: | Fin & tube |
| Defrost type: | Auto Defrost |