




VM-3AN

1:3 Balanced Stereo Audio Distribution Amplifier



The **VM-3AN** is a high-performance distribution amplifier for balanced stereo audio signals. The unit takes one stereo input and distributes the signal to three identical outputs.

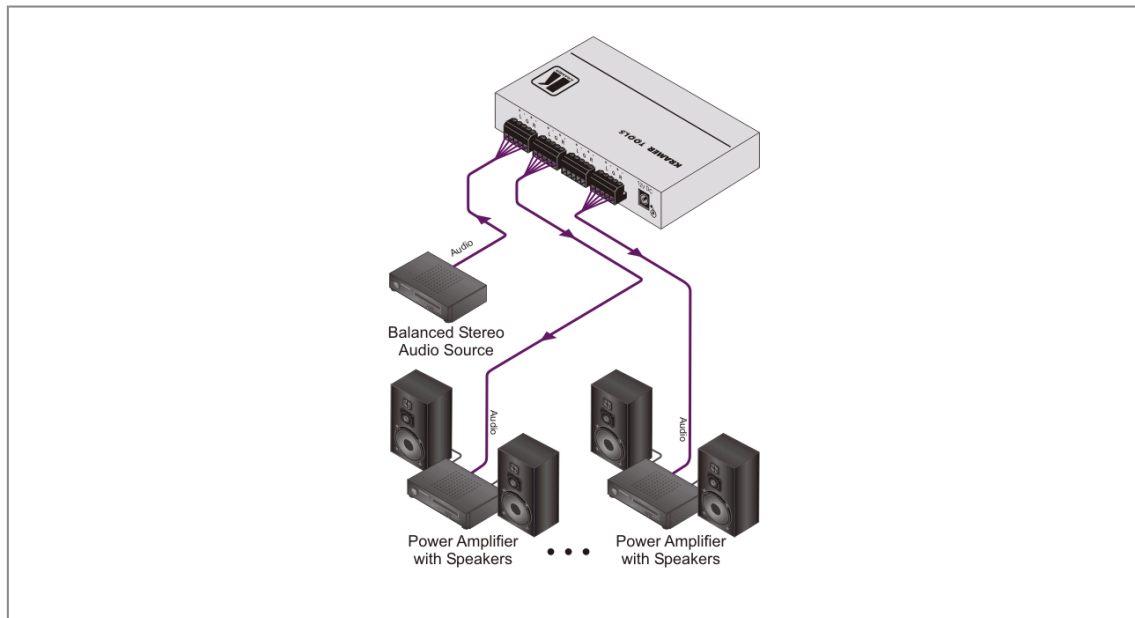



VM-3AN

FEATURES

- S/N Ratio - 90dB.
- L & R Level (Gain) Controls.
- Compact Kramer TOOLS™³ units can be rack mounted side-by-side in a 1U rack space with the optional RK-3T rack adapter.

TECHNICAL SPECIFICATIONS

INPUT:	1 balanced audio stereo on 5-pin terminal blocks.
OUTPUTS:	3 balanced audio stereo on 5-pin terminal blocks.
MAX. OUTPUT LEVEL:	Audio: 18.5Vpp R+/-, L+/- outputs.
BANDWIDTH (-3dB):	>100 kHz.
S/N RATIO:	90dB @ 1kHz.
CONTROL:	Output level control: -77 to +6dB, R+/-, L+/- channels.
AUDIO THD + NOISE:	0.008%.
AUDIO 2d HARMONIC:	0.001%.
POWER SOURCE:	12V DC, 89mA.
DIMENSIONS:	11.7cm x 6cm x 3.2cm (4.6" x 2.4" x 1.3") W, D, H.
WEIGHT:	0.28kg (0.62lbs) approx.
ACCESSORIES:	Power supply.
OPTIONS:	RK-3T 19" rack adapter.