

KRAMER ELECTRONICS, Ltd.

www.kramerelectronics.com

VP-200AK


1:2 Computer Graphics Video & Stereo Audio Distribution Amplifier



Compatible with HDTV component video signals when used with a breakout cable such as the Kramer C-GM/3RVF.



The VP-200AK is a highperformance distribution amplifier computer for graphics video signals, with resolutions up to and exceeding UXGA, and stereo audio signals. It takes a computer graphics video and an unbalanced stereo audio input and outputs simultaneously two computer graphics video, two balanced, and two unbalanced stereo audio signals.

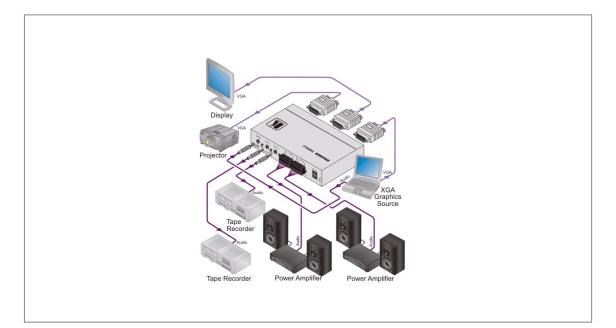



www.kramerelectronics.com

VP-200AK

FEATURES

- High Bandwidth 510MHz (-3dB).
- HDTV Compatible.
- Audio Outputs Simultaneous balanced and unbalanced stereo.
- EQ (Peaking Control) Audio Level (Gain) Controls.
- Kr-isp® Advanced Sync Processing Ensures compatibility with a wide range of computers (even if the sync level is too low) by restoring the sync signal waveform. Kr-isp® advanced sync processing can be enabled or disabled via internal switches.
- ID Bit Control.
- 3ft 15-pin HD Cable Included.
- Compact Kramer TOOLS[™]3 units can be rack mounted side-by-side in a 1U rack space with the optional RK-3T rack adapter.

TECHNICAL SPECIFICATIONS

INPUT:	1 XGA on a 15-pin HD (F)
	connector;1 unbalanced audio stereo on a 3.5mm mini jack audio connector.
OUTPUTS:	2 UXGA on 15-pin HD (F) connectors;2 unbalanced audio stereo on 3.5mm mini jack audio connectors;2 balanced audio stereo on detachable 5- pin terminal blocks.
MAX. OUTPUT LEVEL:	Video: 2.0Vpp; Audio: 7.2Vpp.
BANDWIDTH (- 3dB):	Video: 510MHz; Audio: >100kHz.
DIFF. GAIN:	0.55%.
DIFF. PHASE:	0.10Deg.
K-FACTOR:	<0.05%.
S/N RATIO:	Video: 72.5dB @5MHz; Audio: 82dB (balanced); 88dB (unbalanced).
CONTROLS:	EQ: 0dB to 4.7dB @50MHz.
COUPLING:	Video: DC; Audio: AC at the output; DC at the input.
AUDIO THD + NOISE:	0.005% @1kHz (unbalanced and balanced).
AUDIO 2nd HARMONIC:	0.003% (unbalanced); 0.001% (balanced).
POWER SOURCE:	5V DC, 120mA.
DIMENSIONS:	12cm x 7.18cm x 2.42cm (4.7" x 2.8" x 0.95") W, D, H.
WEIGHT:	0.3kg (0.67lbs) approx.
ACCESSORIES:	Power supply, mounting bracket.
OPTIONS:	RK-3T 19" rack adapter.