


# **LIEBHERR**

## **Side by Side Installation**







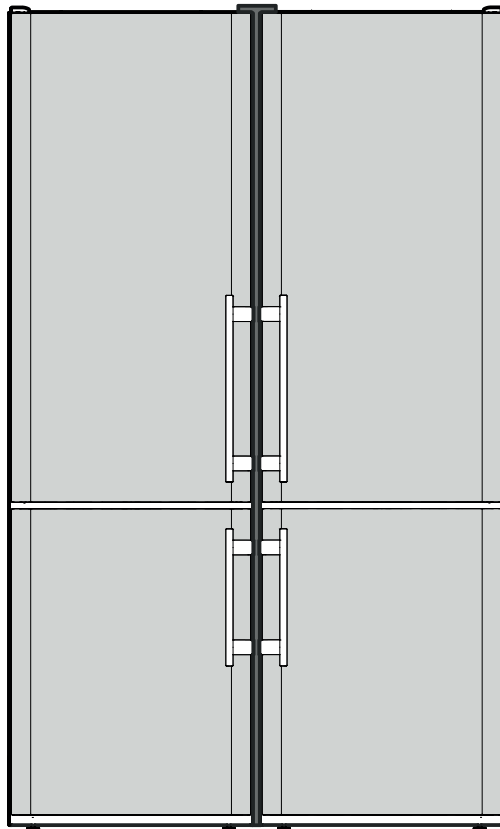



**7085 439-01**


## Appliances

Installation for	
Height = 1818mm (71 <sup>9</sup> / <sub>16</sub> " )	
CNPef 3516	CS 1210
Height = 2012mm (79 <sup>1</sup> / <sub>8</sub> " )	
CNPef 4036	CS 1360B
CNPes 4056	CS 1321
Height = 1684mm (66 <sup>5</sup> / <sub>16</sub> " )	
CNPef 4416	CS 1400R
CNPef 4406	CS 1400PC
CNPef 4436	CS 1400R-IM
Height = 1859mm (73 <sup>3</sup> / <sub>16</sub> " )	
CNPef 4516	CS 1410
Height = 2012mm (79 <sup>1</sup> / <sub>8</sub> " )	
CNPef 5026	CS 1640B



**It is possible to combine appliances with the same height!**

# Components

Parts			
 1x	 1x	 1x	 2x
 4x	 4x	 4x	 4x



**not for appliances:**  
 CNPef 3516 (CS 1210)  
 CNPef 4036 (CS 1360B)  
 CNPes 4056 (CS 1321)  
 take original cover

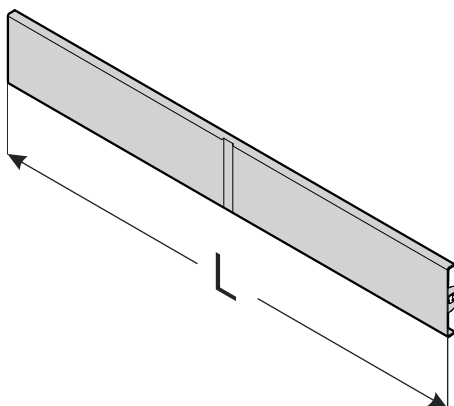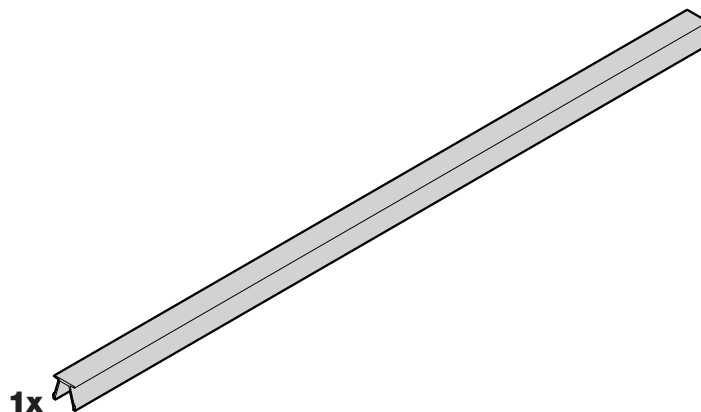

Length needed depends on appliance:

1x L = 415mm / (16 <sup>11</sup>/<sub>32</sub>" )

CNPef 4416 / CS 1400R  
 CNPef 4406 / CS 1400PC  
 CNPef 4436 / CS 1400R-IM  
 CNPef 4516 / CS 1410  
 CNPef 5026 / CS1640B

1x L = 265mm / (10 <sup>7</sup>/<sub>16</sub>" )

CNPef 3516 / CS 1210  
 CNPef 4036 / CS 1360B  
 CNPes 4056 / CS 1321



Length needed depends on appliance:

1x L = 1567mm / (61  $\frac{11}{16}$ " )

CNPef 4416 / CS 1400R  
CNPef 4406 / CS 1400PC  
CNPef 4436 / CS 1400R-IM

1x L = 1744mm / (68  $\frac{21}{32}$ " )

CNPef 3516 / CS 1210  
CNPef 4516 / CS 1410

1x L = 1902mm / (74  $\frac{7}{8}$ " )

CNPef 4036 / CS 1360B  
CNPes 4056 / CS 1321  
CNPef 5026 / CS1640B

## Side by Side Installation



### CAUTION!

The Side by Side Installation should only be done by a trained expert. We recommend this procedure be done by two people.


### IMPORTANT

Remove the protective foil from the outside of both appliances.




### WARNING!


To avoid from tipping, move the appliances slowly.

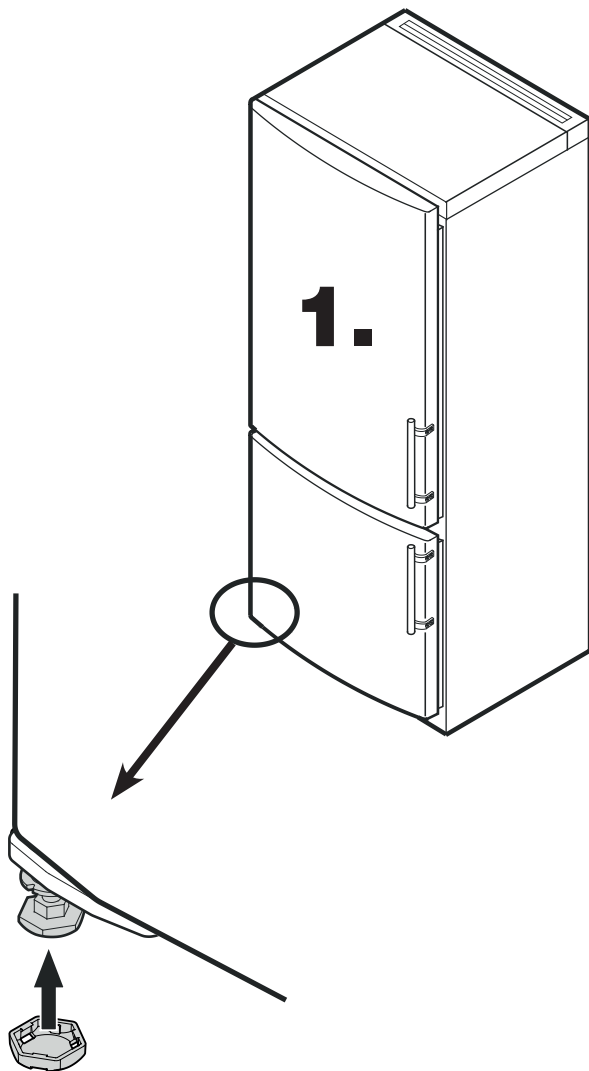

- 1.** Before moving, turn in the screw of the hinge bracket of both appliances so it has no contact to the floor.  
Place the caps onto the four front height-adjustable feet.  
Push both appliances together up to approx. 10 mm apart so that they stand flush at the front.


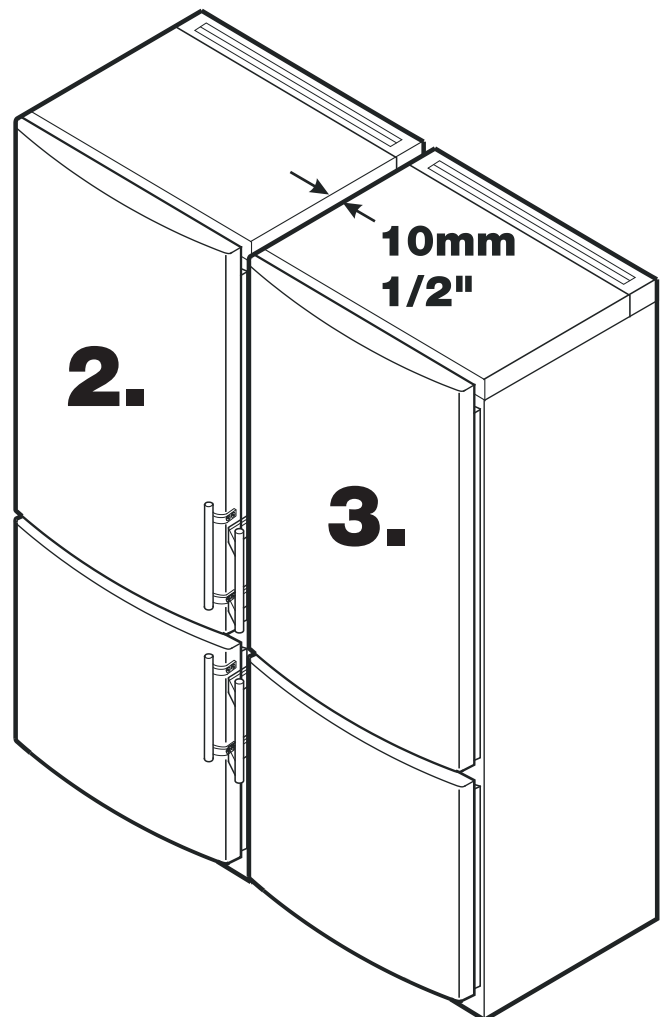


- 2.** Place the left appliance close to its final position, considering there leave enough space to work behind.
- 3.** Place the right appliance next to the left, leaving a gap of approx. 10mm (1/2 inch).

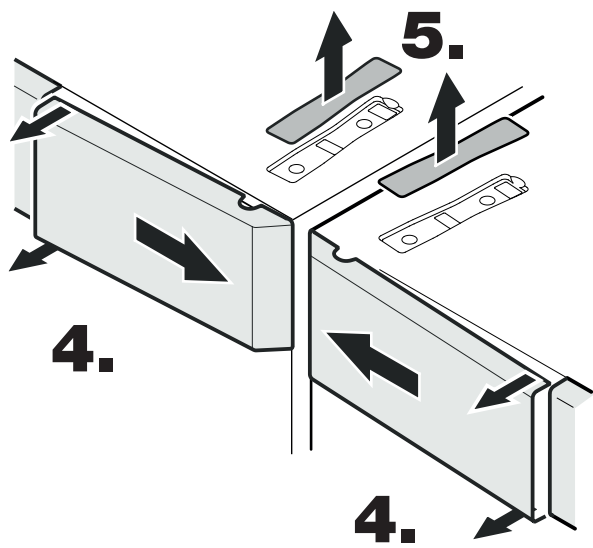


**4.** Open the doors and remove both covers. Unlatch outwards, slide inwards and remove.

**5.** Remove top covers.

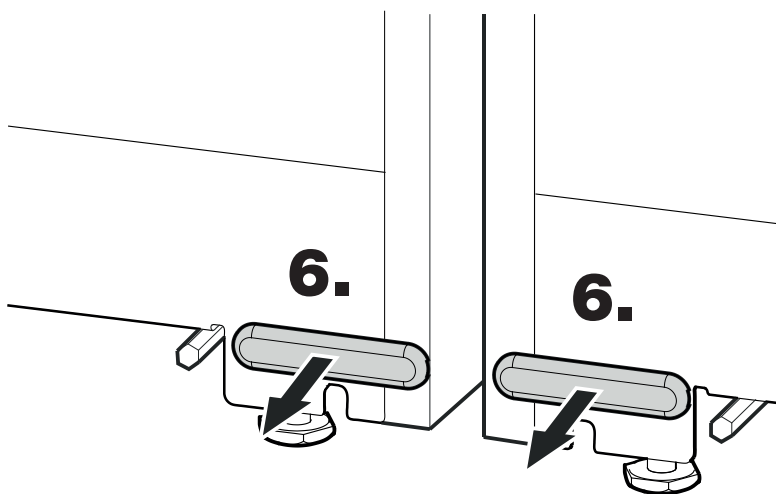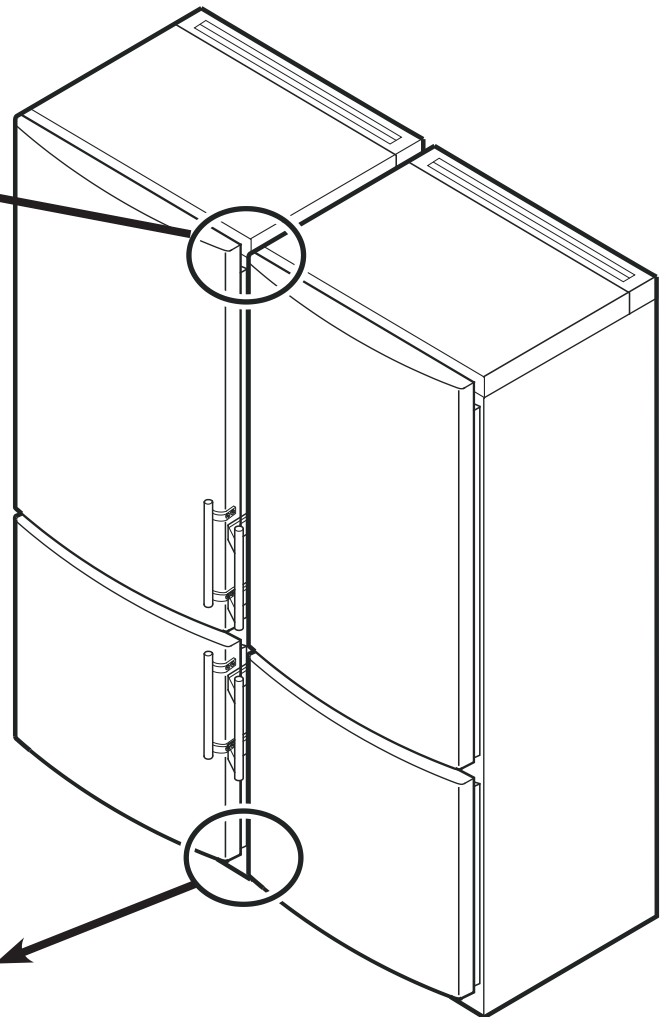

**6.** Remove bottom covers.

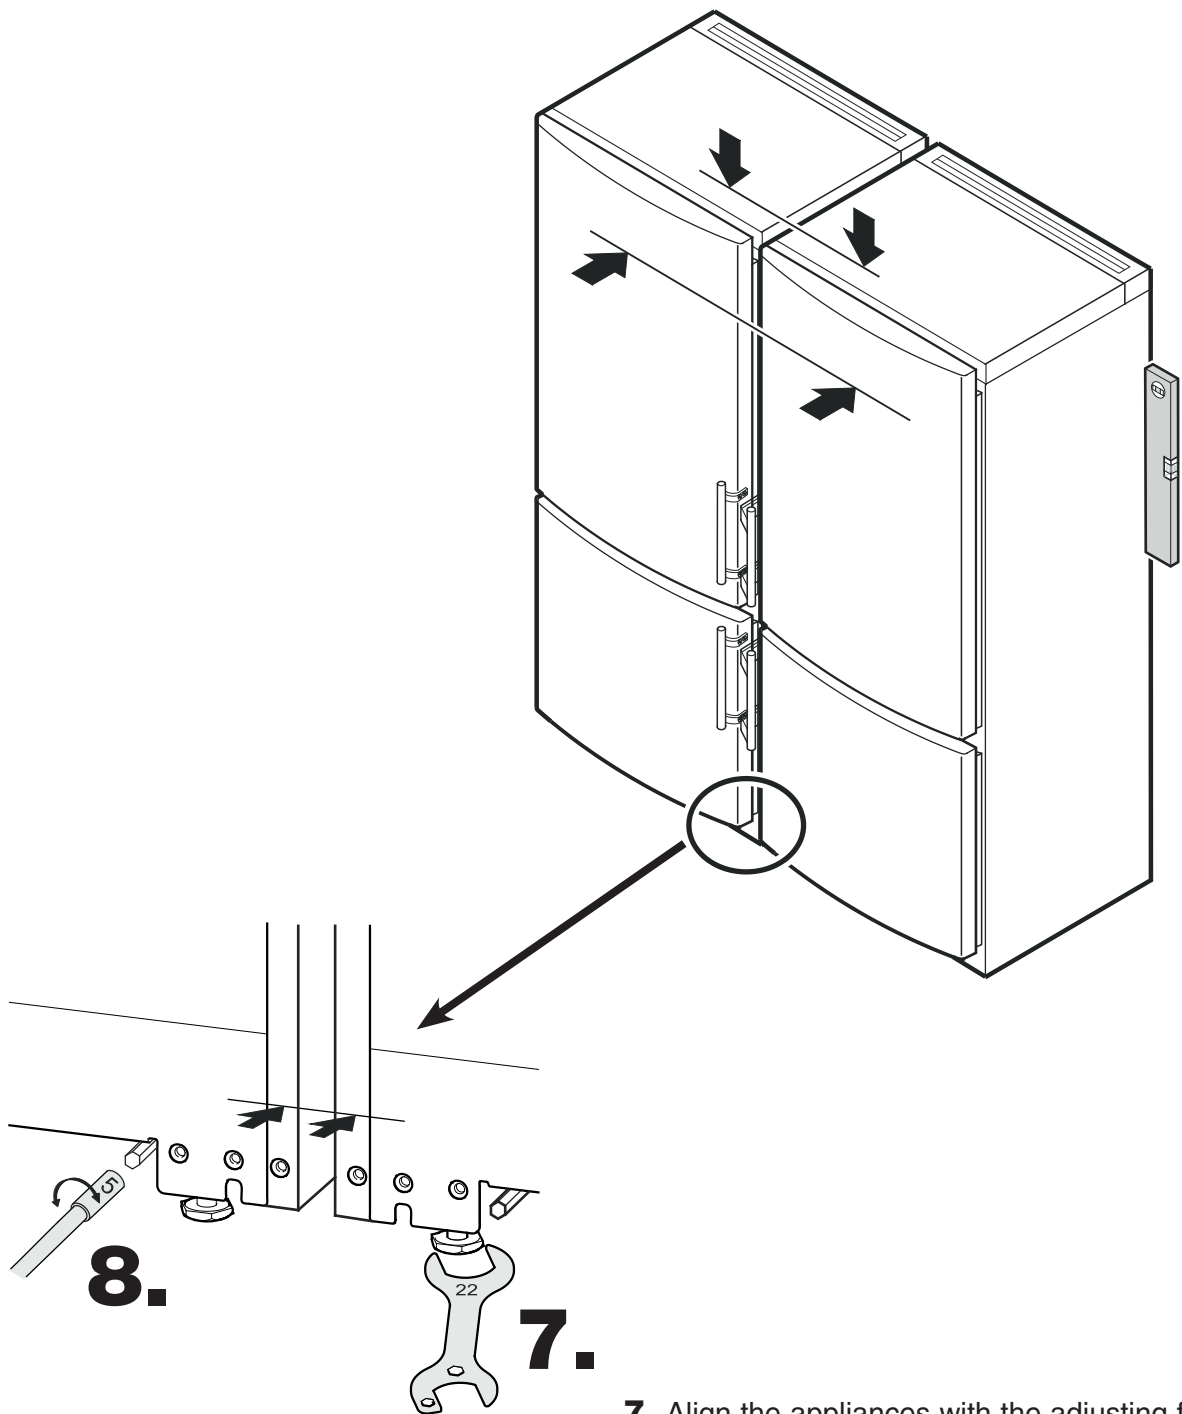


**7.** Align the appliances with the adjusting feet at the front using the SW 22 spanner provided.

**8.** Twist the adjusting bolts to set up the back of the appliance using a box spanner SW 5.


***IMPORTANT***

The appliances must be in line at the front and in height and must be aligned vertical.

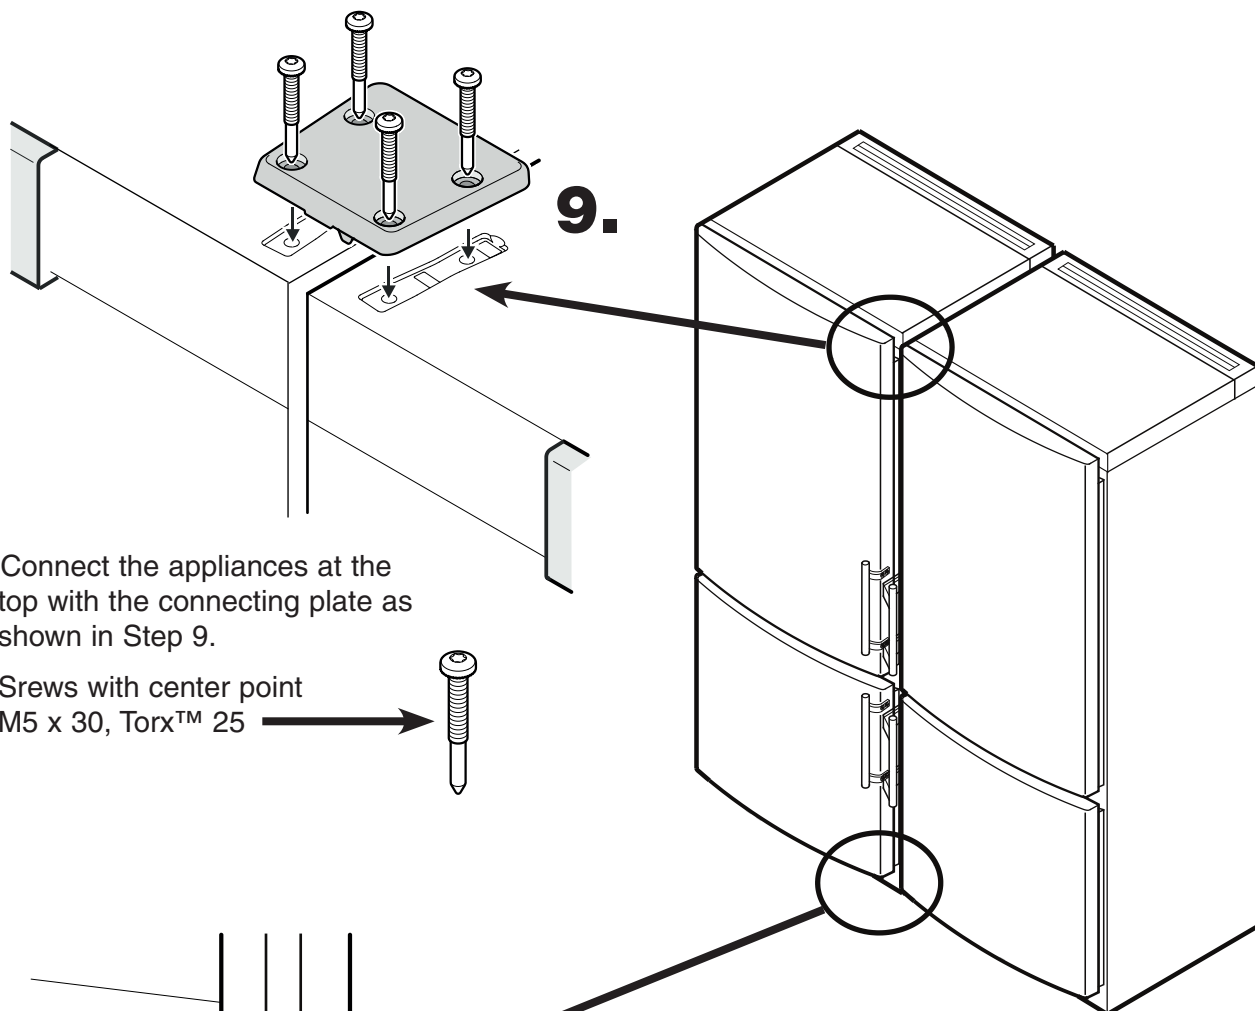

- 9.** Connect the appliances at the top with the connecting plate as shown in Step 9.


Screws with center point  
M5 x 30, Torx™ 25

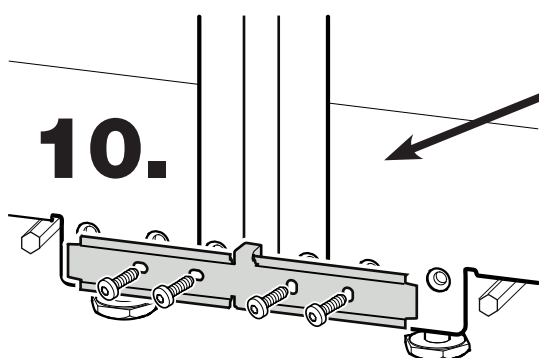


- 10.** Connect the appliances at the bottom with the connecting plate as shown in Step 10.


Screws M5 x 15, Torx™ 25



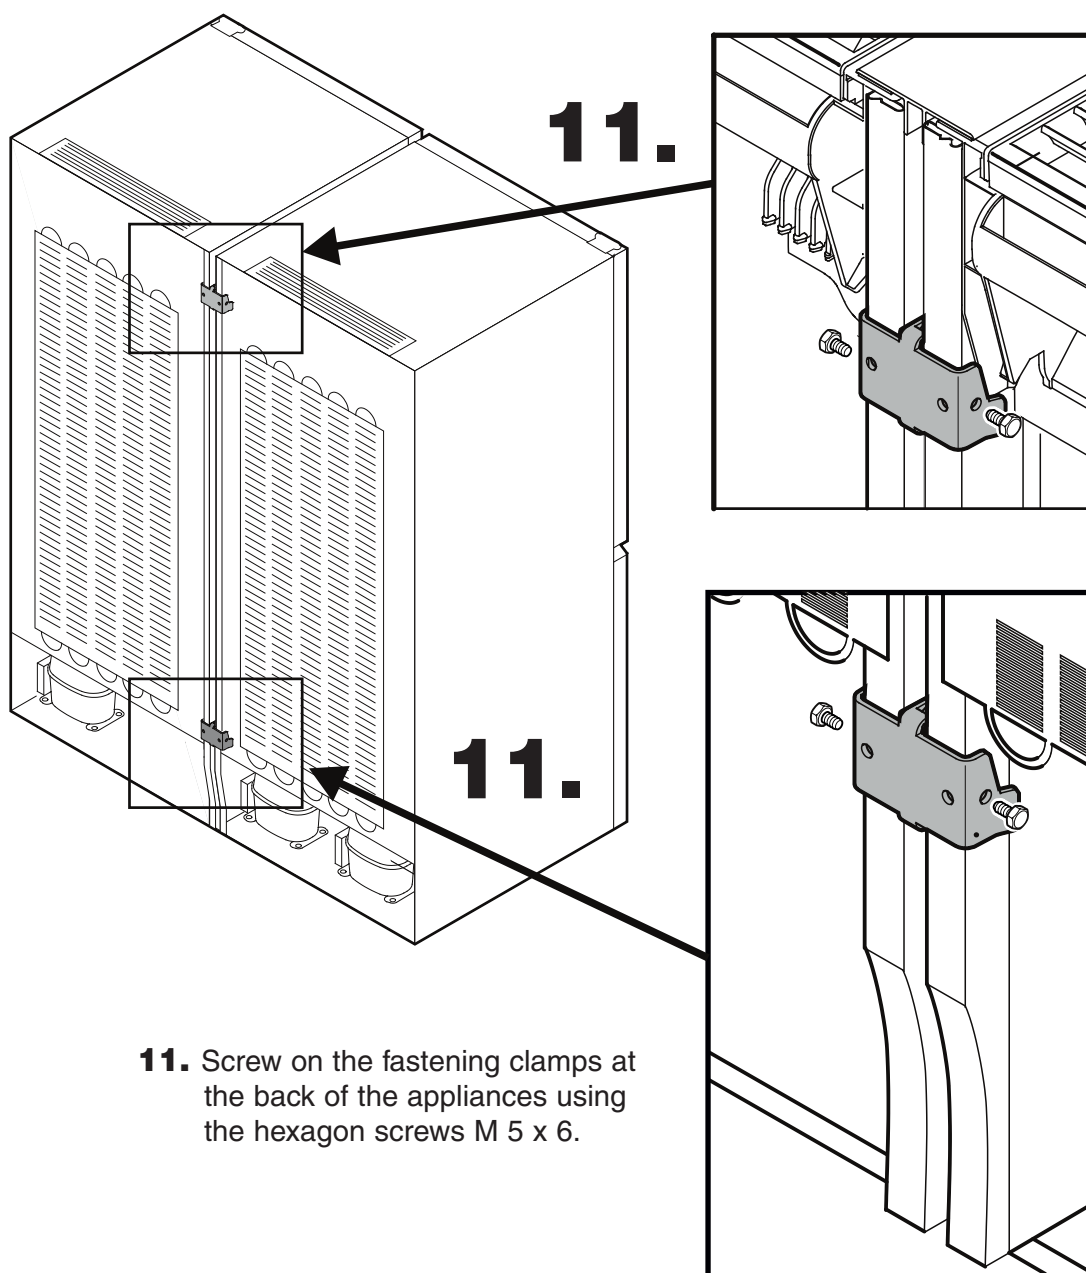


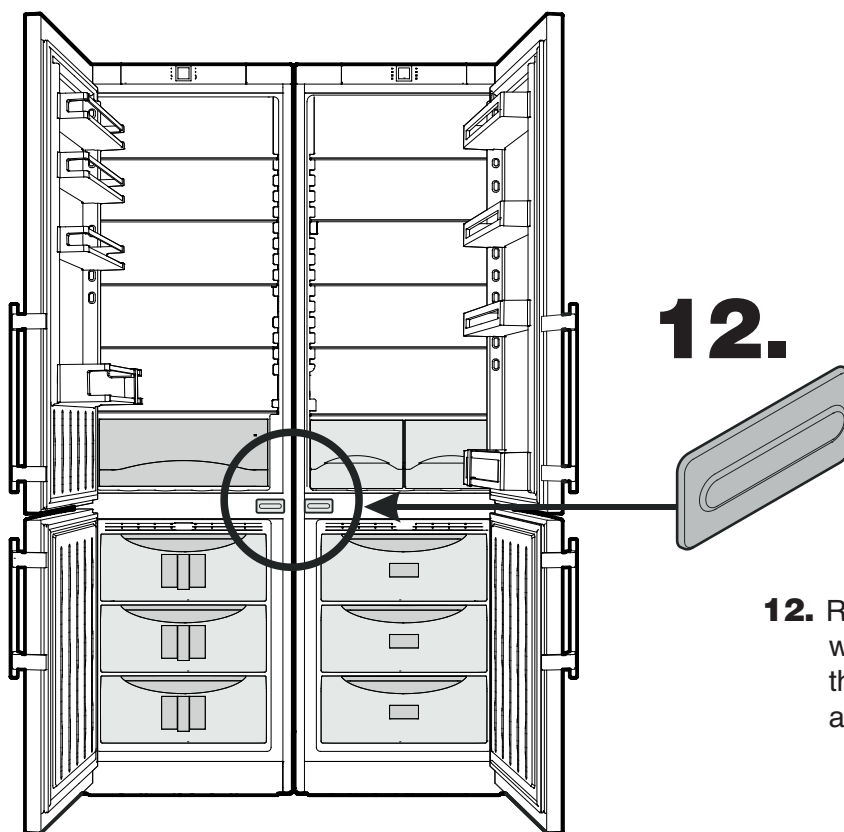


**12.** Replace the center covers with the covers of the kit or the original. Depends on the appliance

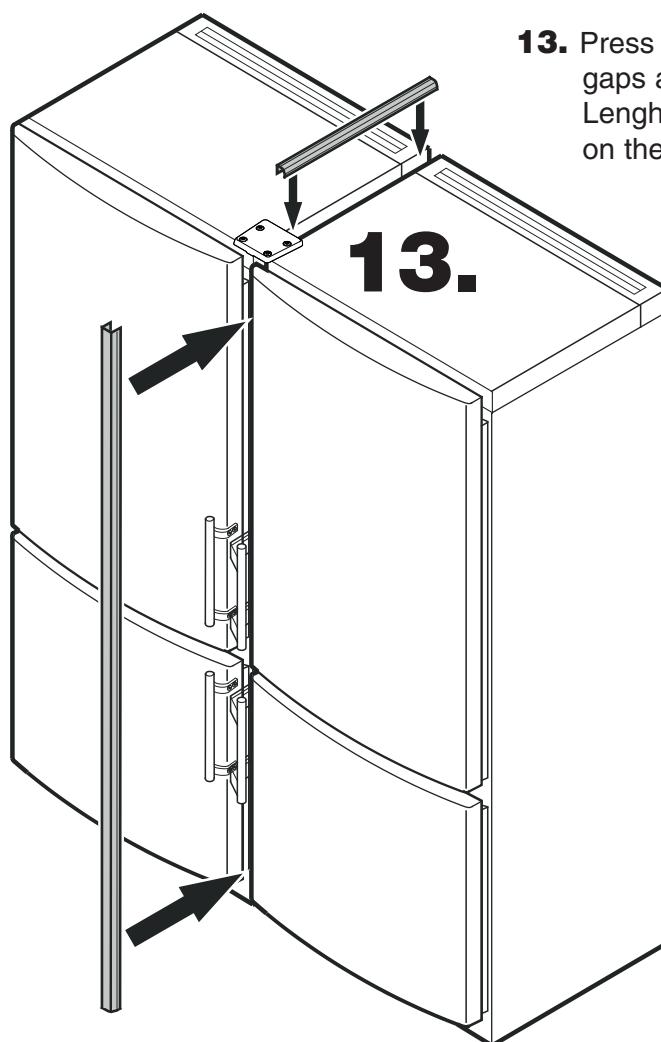


**13.** Press the sealing strips into the gaps at the top and the front. Length of the vertical strips depends on the appliance.

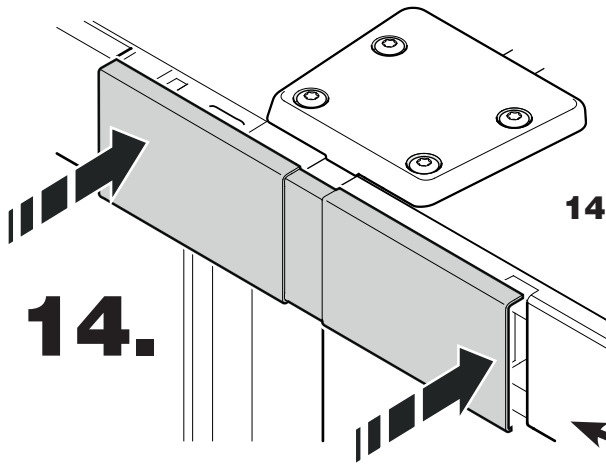

- 14.** Snap the top cover provided into place.  
Top Cover ist depending on the appliance

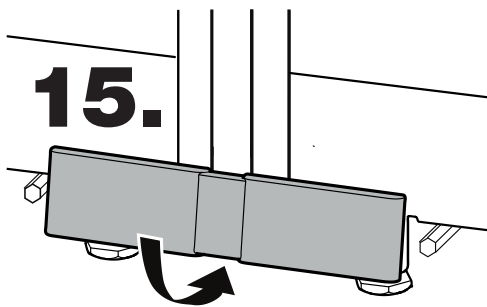

- 15.** Attach the bottom cover provided onto the connecting plate with the top and click into place at the bottom.

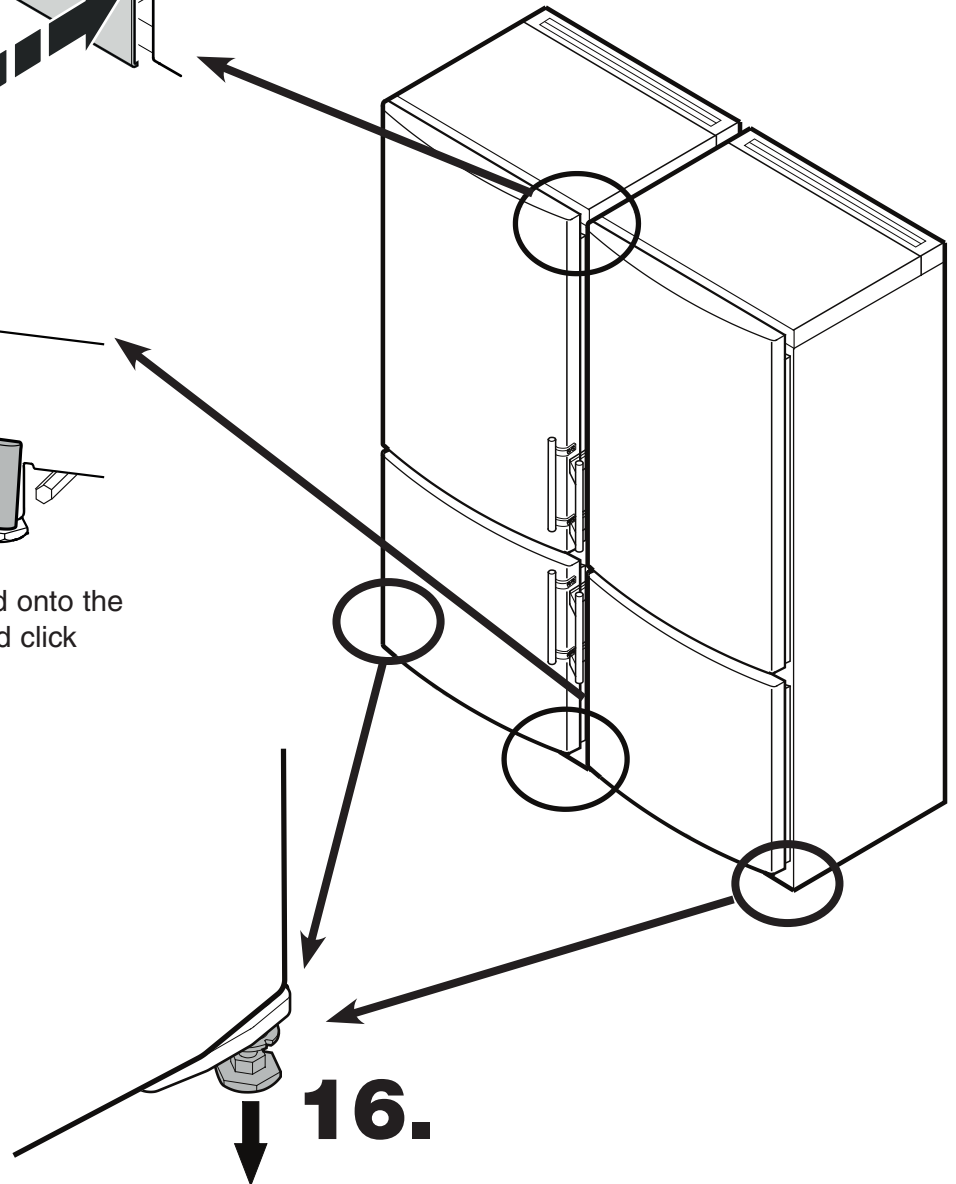

- 16.** When the unit is in it's final position, turn the screw of the left and right hinge bracket until it makes contact with the floor.

**IMPORTANT**

This screws must have contact with the floor to support the hinge brackets.

Installation is now complete.

## **For Service in the U.S.**

### **Liebherr Service Center**

Toll Free: **1-866-LIEBHER or 1-866-543-2437**

Email: [Service-appliances.us@liebherr.com](mailto:Service-appliances.us@liebherr.com)

### **PlusOne Solutions, Inc.**

3501 Quadrangle Blvd, Suite 120

Orlando, FL 32817

## **For Service in Canada**

### **Liebherr Service Center**

Toll Free: **1-888-LIEBHER or 1-888-543-2437**

[www.euro-parts.ca](http://www.euro-parts.ca)

### **EURO-PARTS CANADA**

39822 Belgrave Road

Belgrave, Ontario, N0G 1E0

Phone: (519) 357-3320

Fax: (519) 357-1326

**[www.liebherr-appliances.com](http://www.liebherr-appliances.com)**