

MAXHUB



Lightweight construction, whole column integration, easy installation

31mm, 6.5mm side frame, 6.5KG cabinet weight.



31mm thick



Weights 6.5kg

> Raptor Series - Ultra Wide

| | | | |
|-----------------------------------|---|-------------------------|------------------|
| Aspect Ratio | 21:9 | | |
| Product Model | LA132V11 | LA181V11 | LA209V11 |
| Display Diagonal (inches) | 132" | 181" | 209" |
| Pixel (mm) | 127 | 158 | 19 |
| Overall Dimension (WxHxD)(mm) | 3064 x 1489 x 31 | 4284 x 1832 x 31 | 4894 x 2175 x 31 |
| Weight (kg) | 108 | 189 | 260 |
| Resolution | 2400 x 1080 | 2688 x 1080 | 2560 x 1080 |
| Brightness (nits) | 100-550cd/m ² | | |
| Refresh Rate (Hz) | 3840 | | |
| Contrast | 6500:1 | | |
| Audio Frequency | Built-in 2 *30W audio system, 2.0 channel, full frequency range | | |
| Cabinet Material | Magnailum | | |
| Viewing Angle (H/V) | 160°/140° | | |
| Input Port | 3-way HDMI 2.0 4K@60Hz Signal Input | | |
| Picture in picture | Support HDMI 2.0 signal Picture in Picture | | |
| Installation Mode | Wall Mounting / Hanging / Mobile Stand | Wall Mounting / Hanging | |
| Maintenance | Front Access | | |
| Power Consumption (Max./Ave.)(KW) | 1.84/0.63 | 2.38/0.81 | 2.98/1.01 |
| Recommended Viewing Distance (m) | ≥2.5 | ≥3.2 | ≥3.9 |




MAXHUB

Raptor Series-Ultra Wide

21:9 All-In-One Display Solution



Raptor Series - Ultra Wide is MAXHUB's AIO solution of overall conference solution for Hybrid Signature rooms. The solution contains high definition LED display, which present the video images of speakers or attendees at the conference onsite.

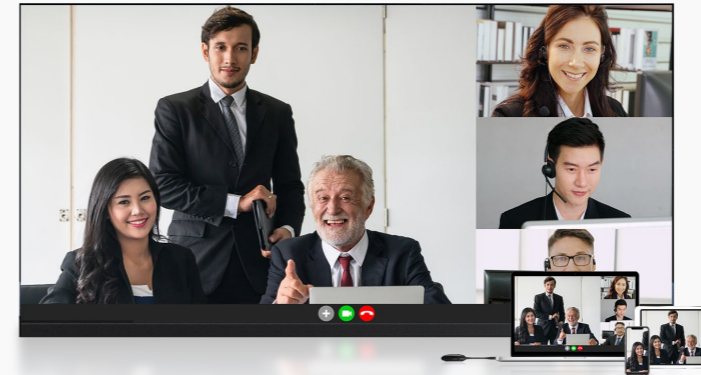

The device screen synchronizes the main LED screen supports a variety of screen mirroring method to achieve wonderful content sharing

One-click screen sharing saves lots of space and help gets rid of the shackles of cumbersome wires. Display content of Computer, mobile phone and tablet can be easily mirrored to the LED screen.




High definition display on giant screen
Stunning visual enjoyment

- 21:9 2400/2560/2688*1080P ultra HD resolution.
- High grey scale level under low brightness.
- Hyper Bit 16+4 Bit Processing, self-developed system with multi-stage correction technology.

Industrial system, stable and reliable support the installation of a variety of common conference systems supporting peripheral unit, easy to carry out collaboration

- Highly integrated board, 3x stability.
- Be compatible with Microsoft Teams Front Row and Zoom room.
- Bundle with MAXHUB Wireless screensharing, Speakerphone, PTZ camera and MTR XCore kit.

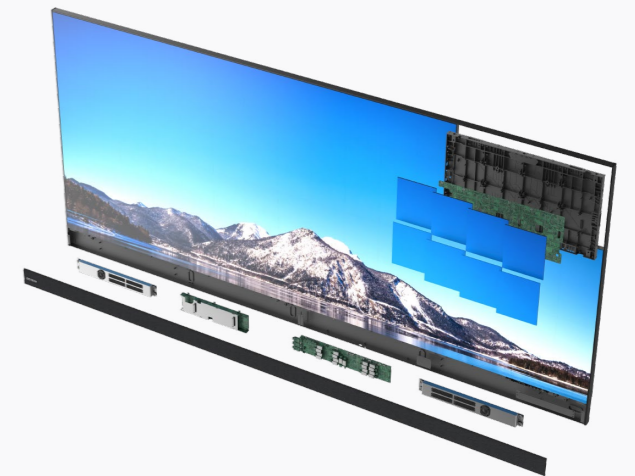

Highly integrated design
audio-visual integration

Professional speaker, 90 DB sensitivity, 180HZ-20KHZ frequency response, 2*30W power.

- ✓ Professional speaker
- ✓ 90 DB sensitivity
- ✓ 180HZ-20KHZ frequency response
- ✓ 2*30W power



Wireless screensharing



PTZ Camera



MAXHUB XC13T



MAXHUB TCP20T



MAXHUB UC BM35

Centralized control management
Support remote management

Built-in RS232 port, easy to achieve device interconnection, support self-developed operation and maintenance system, unified management, reduce stand-by power consumption and content publishing. Support remote maintenance dehumidification, screen inspection, abnormal warning and factory recovery.