

OF-156P-A1

15.6" PCAP Touch Monitor




Description

This industrial-grade, OF-156P-A1, 15.6" open frame monitor is the perfect solution for a wide variety of embedded applications. Uniquely designed with the glass settling proud of the bezel allowing for a seamless fit into a broad range of kiosks and fixtures, exceeding your integration expectations – The IP65 rating, 10-point touch, 1920 x 1080 resolution and innovative bezel design encourages a memorable end-user experience that outperforms the competition with a dependable, reliable, performance driven product.

Featured Specifications

- Size: 15.6" TFT LCD
- Maximum Resolution: 1920 x 1080
- Contrast Ratio: 1000:1
- Aspect Ratio: 16:9
- Brightness: 450 nits (No Touch), 400 nits (PCAP)
- View Angle: H: 178°, V: 178°
- Video Port: 1 x VGA, 1 x DP+, 1 x HDMI
- Warranty: 3 year

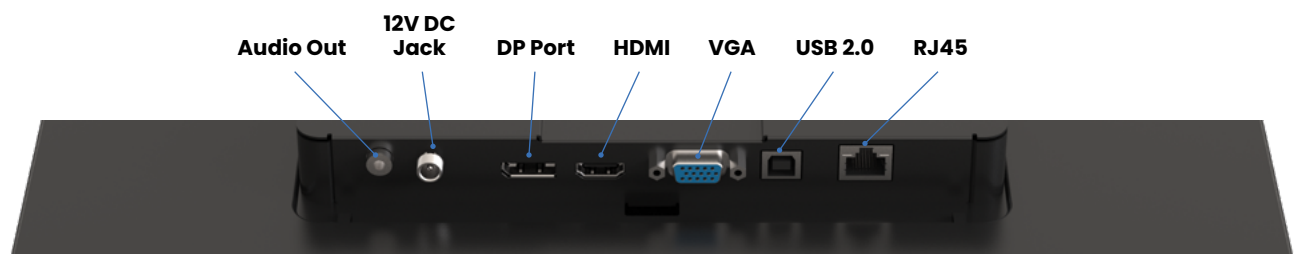

Specifications

Touch LCD Display

Touch Screen	Projected Capacitive
Touch Points	10
Touch Screen Interface	USB-HID (Type B)

I/O Ports

Serial Port	1x RJ45 (Remote Key)
USB Port	1 x USB 2.0 (Type B) for Touch Interface (USB-HID)
Video Port	1 x VGA, 1 x DP+, 1 x HDMI
Audio Port	Audio-out
Power Input	1 x 12V DC Jack with lock
Speaker	-

Physical Properties

Power Supply	36W (12V, 3A) External Power Adaptor
Housing Color	Black
Construction	Glass, SECC Metal
Compliance	Front Panel IP65 Compliant
Dimensions (W x H x D)	398.4 x 245.8 x 42.2 mm (without stand)
Carton (W x H x D)	470 x 343 x 150 mm
Product Weight (kg)	2.46 kg
Carton Weight (kg)	4.25 kg
VESA	100 x 100
Ball Drop / IK	IK08

Safety

Certifications	CE, FCC, CCC, UL/cUL, RoHS
----------------	----------------------------

Environment

Operating Temperature	0°C ~ 40°C, 20% ~ 80% RH. Non-Condensing
Storage Temperature	-20°C ~ 60°C, 10% ~ 95% RH. Non-Condensing

