

NEXSYS



Middle Atlantic's evolution of AV Power Distribution and Backup.

. . . Ċ MIDDLE 0 Output: 1200 Batt: 100% 000000 MIDDLE • Ċ MIDDLE • • 0 10 1 10 Output: 1200 Batt: 100% 00000 MIDDLE 0 0 4 0 Output: 1200 Batt: 100% 00000 MIDDLE 0 Output: 120V Batt: 100% 00000 MIDDLE ji e ji e i e Ċ MIDDLE 0 Output: 1200 Batt: 100% 00000 MIDDLE






NEXSYS is built on a promise that we've kept for over two decades – more than half the life of the company – that our products are designed, engineered, and built for AV. NEXSYS combines power distribution and power backup into a comprehensive and cohesive product platform, united by design – both internal and external.

Why are you plugging your AV equipment into anything else?

Just Choose NEXSYS.





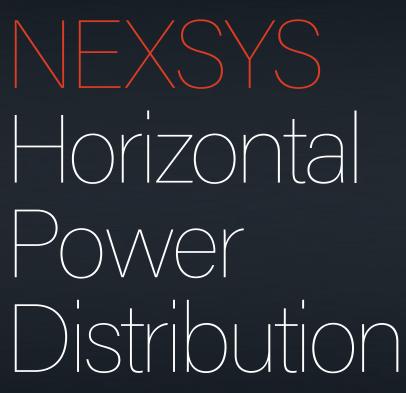

15A – 20A – 120V – 9 Outlets – Remote Contact Control Surge Protection – Voltage Protection



Illuminated Power Button and Light Well

Visual indication that the unit is powered up. (Don't worry, it's really not this bright.)

2Illuminated Front Panel Indicators and Buttons

Surge Protection Status Indicator

Selectable On/Off Voltage Protection Button

Selectable On/Off Remote Contact Control Button

SFront Convenience





Superior Surge Protection on ALL models Patented Series Protection Models (shown)

Improved Multi-Stage MOV Models

A Series Protection

The fastest, most reliable, non-sacrificial surge protection on the market. That's why it's patented.



We provide a 9' SignalSAFE™ power cable but use whatever length you want for perfect cable management.

28 Rear Outlets

Outlets are rotated to eliminate wallwart blockage.





Status Port

The "Status" Dry Contact Port provides power status for the unit on Series Protection models, and surge status – when compromised – on MOV models.

A Remote Port

The "Remote" Dry Contact Port enables remote control (on/off) via a control system.

BONUS FEATURE

Connect the "Status" Port of a Series Protection model to the "Remote" Port of another NEXSYS PDU to turn that unit on or off.



NEXSYS Compact Distribution

15A – 20A – 120V – 2 & 6 Outlets – Surge Protection Voltage Protection – Flexible Mounting

Surge and Voltage Protection Indicator Lights See if the unit is protected no matter where it's mounted – behind-the-display or in hard-to-reach areas - with the easy to see LED lights that wrap the corner of the unit.

2IEC Inlet

We provide a 2' SignalSAFE™ power cable but use whatever length you want for perfect cable management.





Status Port

The "Status" Dry Contact Port provides power status for the unit on Series Protection models, and surge status – when compromised – on MOV models.

Voltage Selection Port

Enable or disable the Voltage Protection feature from this port.

 To disable, simply "short" the pins

Series Protection

The fastest, most reliable, non-sacrificial surge protection on the market. That's why it's patented.





Superior Surge Protection on **ALL** Models

- Patented Series
 Protection Models
 (shown)
- Improved Multi-Stage MOV Models

C-Clamp Mounting Bracket

The fastest way to mount the NEXSYS Compact PDU without hardware. Attach the clamp to a wall or Lever Lock[™] plate and clip on the PDU for tool-free mounting inside a rack, kiosk, in-wall box, and more.



BOTH BRACKETS INCLUDED WITH ALL COMPACT PDUS



2 L Mounting Bracket

Secure the L-Brackets with hardware to the unit and mount anywhere you want, including Lever Lock™!

Botated Outlets

Outlets are rotated to eliminate wall wart blockage. You pay for the outlets; you should be able to use them!











NEXSYS Power Backup

15A – 20A – 120V – 1000VA – 1500VA – 2000VA – RackLink[™] Enabled – 8 Outlets – Bank Control Individual Outlet Control – Surge Protection – 4 Post Mounting – ENERGY STAR Certified

LCD Panel and Battery Status Indicators

Cycle through critical information, update settings and see battery health





2 Ultra Slim Mounting Pre-Installed 4 post mounting kit with integrated rack ears for rack mounting even with a middle pair of rail.



All models accept the RackLink[™] IP Card (UPX-RLNK-CARD)

Models available with the RackLink[™] IP Card pre-installed (shown)

2 Monitor Temperature and Humidity

Add an optional sensor to monitor temperature and humidity in your AV system.

BIEC Inlet We provide a 6' SignalSAFE[™] power cable but use whatever length you want for perfect cable management.

Outlet Control on ALL Models

Bank Outlet Control with two 4 outlet banks (shown)

Individual Outlet Control with 8 outlets







Just Choose NEXSYS.



LEGRAND | AV COMMERCIAL BRANDS C2G | Chief | Da-Lite | Luxul | Middle Atlantic | Vaddio | Wiremold

WHAT GREAT SYSTEMS ARE BUILT ON™ | legrandav.com

USA 800.266.7225 av.middleatlantic.support@legrand.com CANADA 888.766.9770 av.middleatlantic.support@legrand.com

©2022 Legrand AV Inc. 220044 Rev 1 10/22 Middle Atlantic is a registered trademark of Legrand AV Inc. All other brand names or marks are used for identification purposes and are trademarks of their respective owners. All patents are protected under existing designations. Other patents pending.