


NEC LED-FA015i2-137

Indoor LED 1.5 mm 137" FullHD Bundle

Datasheet

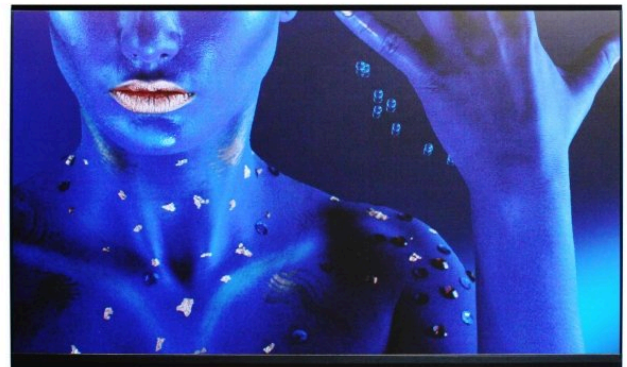

Nothing less than magnificent

For premium large surface visualization, NEC's fine pitch LED FA Series Bundles provide standard resolution, direct view LED screens for applications in meeting spaces and exclusive signage. With a depth of just 5cm, plus complete internal cabling, the FA series presents a sleek profile for a bezel-free viewing experience. With excellent viewing angles, consistent vibrant colours and superb brightness; the FA Series delivers content that gets noticed. Native HD, FHD and UHD resolutions are achieved through configuration of multiple 16:9 cabinets which are bundled with a power bar, framing, mounting and controller. Designed with high quality components and maintenance access from the front, the FA Series provides a display solution with longevity and good return on investment. The prime solution for boardrooms, auditoria, luxury retail environments and control rooms.

Benefits

Care-free installation – with bundled solutions that deliver all you need to get your LED video wall up and running.

Large scale for perfectly detailed imagery – completely bezel-less design with high contrast rates deliver an unhindered viewing experience.

Secure performance for demanding applications – with high-end components and redundant module design with additional power supply and data cards to ensure ongoing operations with a minimal loss of brightness levels.

Superb readability in bright light environments – high brightness levels of up to 800 cd/m², along with wide viewing angles deliver clear messages to your audience even under varying and demanding ambient conditions.

Slim design – with a flush rear profile, LED modules can be integrated very close to the wall with minimal gap necessary due to very low heat emission.

Product Information

Product Name	NEC LED-FA015i2-137
Product Group	Indoor LED 1.5 mm 137" FullHD Bundle
Order Code	81000173

Display

Pixel Configuration	3-in-1 SMD (Black)
LED type	SMD (1010)
Screen Size [inch/cm]	137 / 348
Aspect Ratio	16:9
Pixel Pitch [mm]	1.5
Brightness (max.) [cd/m²]	800
Lifetime	100000 hrs (50% brightness)
Contrast Ratio (typ.)	5000:1
Viewing Angle [°]	170 horizontal / 170 vertical
Dimming Capability	256 levels
Colour Processing	16 bit
Colours [Trill.]	281
LED Driving Method	1/27 dynamic scan
Frame Rate [Hz]	50/60
Refresh Rate [Hz]	≤ 3840
Colour Temperature [K]	3000 - 9500

Screen Resolution

Resolution	1920 x 1080
Resolution per m²	398892
Number of Pixel per module [dot]	384 x 216
Number of Pixel per card [dot]	96 x 108

Connectivity

Input Video Digital	1 x 3G SDI; 1 x DVI-D; 1 x HDMI
Input Control	1 x GenLock; 1 x LAN

Electrical

Total Power Consumption [W]	1425 typ. / 3125 max.
Power Consumption typ. [W]	275 per m² (normal use)
Power Consumption max. [W]	600 per m²

Environmental Conditions

Operating Temperature [°C]	-20 to 40
Operating Humidity [%]	10 to 80

Mechanical

Dimensions (W x H x D) [mm] per module	608 x 342 x 49
Dimensions (W x H x D) [mm]	3,080 x 1,831.5 x 81
Weight [kg]	279

Additional Features

Shipping Content	2x LED Controller; LED Modules (25 Cabinets, 200 Pixel Cards); Overframe Kit (5x5); Pixel Card Removal Tool; Power Bar; Spare Parts Kit; Wall mount (5x5)
Special Characteristics	Cableless Connector for Data and Power; Flush Surface SMD Design; Humidity-proof SMD Design; Redundant Data Receiving Cards; Redundant Power Supplies
Manufacturer	NEC
Serviceability	Front Service
IP Level	IP20
Certifications	CE; ETL; FCC Class A; RoHS
Warranty	3 years
Material	Aluminum Cabinet

This document is © 2021 Sharp NEC Display Solutions Europe GmbH.

All rights reserved in favour of their respective owners. All hardware and software names are brand names and/or registered trademarks of the respective manufacturers. All specifications are subject to change without notice. Errors and omissions are excepted. 03.09.2021