

24-Inch Thermo Griddle M24TG - E-Series



Standard Features

- 60,000 BTU output
- 24.0" x 19.4" Cooking area
- Stainless steel U-shaped burner
- Easy to clean grease trap
- Heavy duty chrome plate knobs
- Propane gas conversion kit included
- 5/8" Griddle plate thickness

Exterior Features

- Stainless steel body and legs
- 4" Adjustable legs

Certified Safety Standard

ETL Certified



• ETL Sanitation Listed


Warranty Information

• One year on-site Parts and Labor





24-Inch Thermo Griddle • M24TG - E-Series

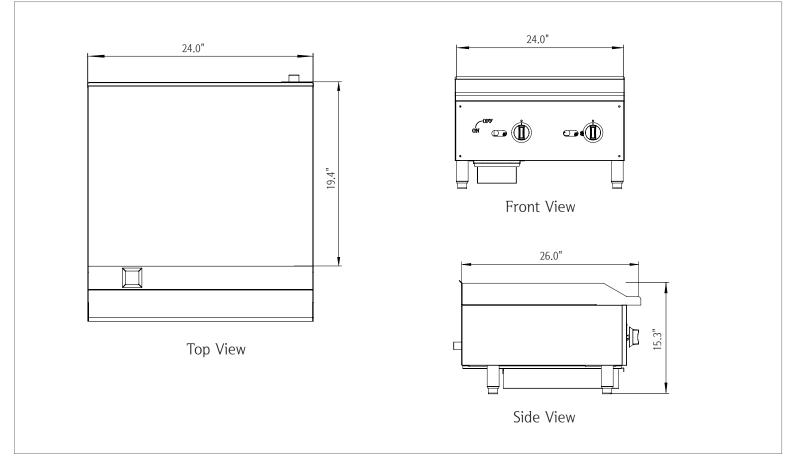

| Model | | M24TG | Propane Conversion |
|----------------------------------|-------------|-----------------------|-----------------------|
| Gas Output (BTU) | | 60,000 | 60,000 |
| Number of Burners | | 2 | 2 |
| Shipping Weight (Lbs) | | 158.0 | 158.0 |
| Manifold | Natural Gas | 4" W.C. | - |
| Pressure | Propane Gas | - | 10" W.C. |
| Manifold Size | | 3/4" | 3/4" |
| Burner Orifice Size | | 36/2.75mm | 51/1.75mm |
| Cooking Area (Sq. In.) | | 465.6 | 465.6 |
| Dimensions (W x D x H) | | 24.0" x 26.0" x 15.3" | 24.0" x 26.0" x 15.3" |
| Crated Dimensions (W x D x H) | | 30.0" × 30.0" × 20.0" | 30.0" × 30.0" × 20.0" |

Clearance requirements:

• For use only on non-combustible floors.

• Legs or casters are required for non-combusitble floors.

| Clearance requirements | Combustible Surfaces | Non- combustible Surfaces |
|------------------------|-------------------------|---------------------------------|
| Rear | 4 | 0" |
| Left | 4 | 0" |
| Right | 4 | 0" |
| | | |

Options and accessories