

24-Inch Manual Griddle • MCCMG24A



Standard Features

- 68,000/60,000 BTU output
- 24.0" W x 24.0" D x 1" thick griddle plate
- Stainless Steel U-Shaped Burner
- Bullnose edge
- Easy to clean grease trap
- Heavy Duty Chrome Plated comfort grip knobs

Exterior Features

- Stainless steel body and legs
- 6" Adjustable legs

Certified Safety Standard

- ETL Certified
- ETL Sanitation Listed






Warranty Information

• One year on-site Parts and Labor





24-Inch Manual Griddle • MCCMG24A

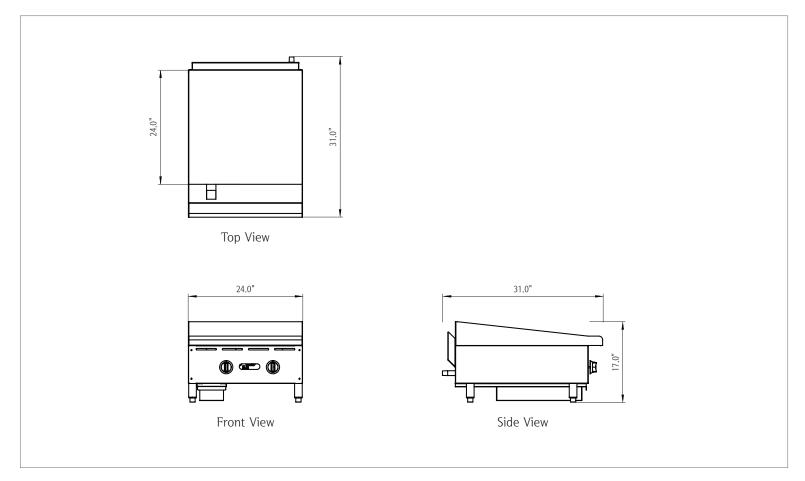

29.1" x 37.8" x 20.5"

Me	odel	MCCMG24A	MCCMG24A-P (Propane)
Gas Output	BTU	68,000	60,000
	(KW)	17.6	17.6
Number	of Burners	2	2
Shipping V	Weight (Lbs)	264.6	264.6
Manifold	Natural Gas	4" W.C.	-
Pressure	Propane Gas	-	10" W.C.
Manif	old Size	3/4"	3/4"
Burner Orifice Size		35/2 . 80mm	52/1.60mm
Cooking Area (Sq. In.)		571.2	571.2
Dimensions (W x D x H)		24.0" x 31.0" x 17.0"	24.0" x 31.0" x 17.0"
Crated Dimensions		29 1" v 27 8" v 20 5"	20 1" v 27 8" v 20 5"

29.1" x 37.8" x 20.5"

Clearance requirements:

- For use only on non-combustible floors.
- Legs or casters are required for non-combusitble floors.

Clearance requirements	Combustible Surfaces	Non- combustible Surfaces
Rear	6" ~ 8"	0"
Left	6" ~ 8"	0"
Right	6" ~ 8"	0"

Options and accessories

 $(W \times D \times H)$



36-Inch Manual Griddle • MCCMG36A



Standard Features

- 102,000/90,000 BTU output
- ◆ 36.0" W x 24.0" D x 1" thick griddle plate
- Stainless Steel U-Shaped Burner
- Bullnose edge
- Easy to clean grease trap
- Heavy Duty Chrome Plated comfort grip knobs

Exterior Features

- Stainless steel body and legs
- 6" Adjustable legs

Certified Safety Standard

- ETL Certified
- ETL Sanitation Listed






Warranty Information

• One year on-site Parts and Labor





36-Inch Manual Griddle • MCCMG36A

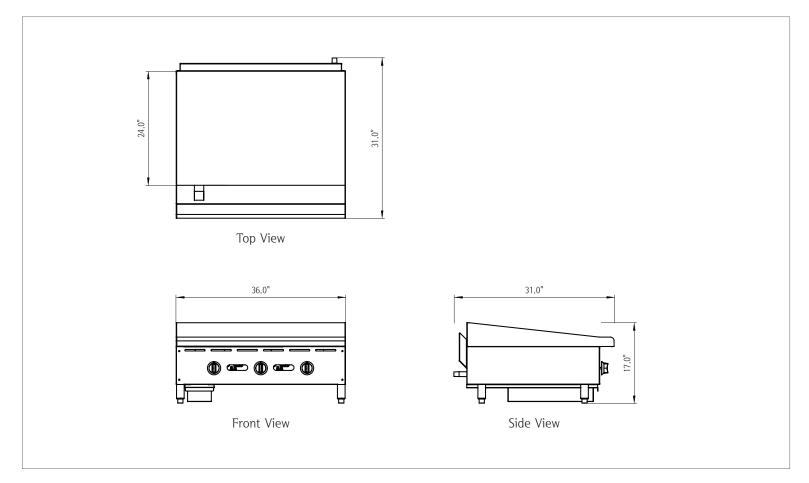

M	odel	MCCMG36A	MCCMG36A-P (Propane)
Cas Outrout	BTU	102,000	90,000
Gas Output	(KW)	26.4	26.4
Number	of Burners	3	3
Shipping V	Weight (Lbs)	374.9	374.9
Manifold	Natural Gas	4" W.C.	-
Pressure	Propane Gas	-	10" W.C.
Manif	old Size	3/4"	3/4"
Burner Orifice Size		35/2 . 80mm	52/1.60mm
Cooking Area (Sq. In.)		856.8	856.8
Dimensions (W x D x H)		36.0" x 31.0" x 17.0"	36.0" x 31.0" x 17.0"
Crated Dimensions		40.9" × 37.8" × 20.5"	40.9" × 37.8" × 20.5"

Clearance requirements:

- For use only on non-combustible floors.
- Legs or casters are required for non-combusitble floors.

Clearance requirements	Combustible Surfaces	Non- combustible Surfaces
Rear	6" ~ 8"	0"
Left	6" ~ 8"	0"
Right	6" ~ 8"	0"

Options and accessories

 $(W \times D \times H)$



48-Inch Manual Griddle • MCCMG48A



Standard Features

- 136,000/120,000 BTU output
- ◆ 48.0" W x 24.0" D x 1" thick griddle plate
- Stainless Steel U-Shaped Burner
- Bullnose edge
- Easy to clean grease trap
- Heavy Duty Chrome Plated comfort grip knobs

Exterior Features

- Stainless steel body and legs
- 6" Adjustable legs

Certified Safety Standard

- ETL Certified
- ETL Sanitation Listed






Warranty Information

• One year on-site Parts and Labor





48-Inch Manual Griddle • MCCMG48A

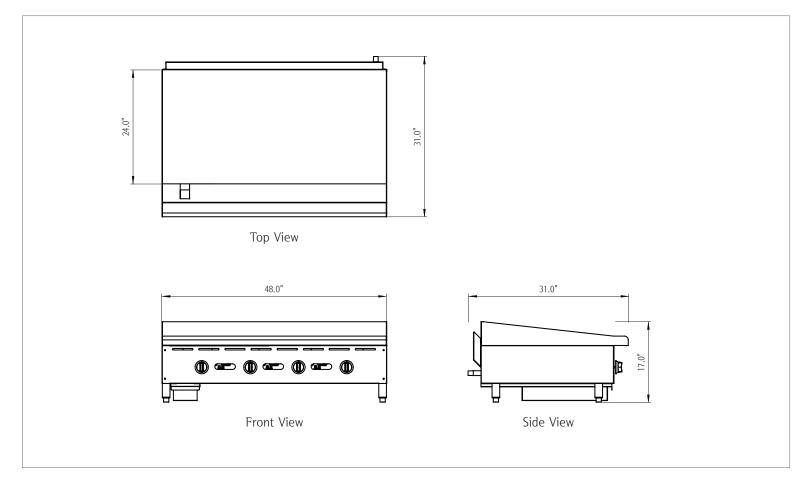

M	odel	MCCMG48A	MCCMG48A-P (Propane)
Can Outrout	BTU	136,000	120,000
Gas Output	(KW)	35.2	35.2
Number	of Burners	4	4
Shipping V	Weight (Lbs)	485.1	485.1
Manifold	Natural Gas	4" W.C.	-
Pressure	Propane Gas	-	10" W.C.
Manif	old Size	3/4"	3/4"
Burner Orifice Size		35/2 . 80mm	52/1.60mm
Cooking Area (Sq. In.)		1140	1140
Dimensions (W x D x H)		48.0" x 31.0" x 17.0"	48.0" x 31.0" x 17.0"
Crated Dimensions		52.8" x 37.8" x 20.5"	52.8" x 37.8" x 20.5"

Clearance requirements:

- For use only on non-combustible floors.
- Legs or casters are required for non-combusitble floors.

Clearance requirements	Combustible Surfaces	Non- combustible Surfaces
Rear	6" ~ 8"	0"
Left	6" ~ 8"	0"
Right	6" ~ 8"	0"

Options and accessories

 $(W \times D \times H)$