



24-Inch Thermo Griddle ♦ MCCTG24A



Standard Features

- ♦ 68,000/60,000 BTU output
- ♦ 24.0" W x 24.0" D x 1" thick griddle plate
- ♦ Stainless Steel U-Shaped Burner
- ♦ Bullnose edge
- ♦ Easy to clean grease trap
- ♦ Heavy Duty Chrome Plated comfort grip knobs
- ♦ Embedded temperature probe for more accurate cooking and better performance

Exterior Features

- ♦ Stainless steel body and legs
- ♦ 6" Adjustable legs

Certified Safety Standard

- ♦ ETL Certified
- ♦ ETL Sanitation Listed




Warranty Information

- ♦ One year on-site Parts and Labor







24-Inch Thermo Griddle ♦ MCCTG24A

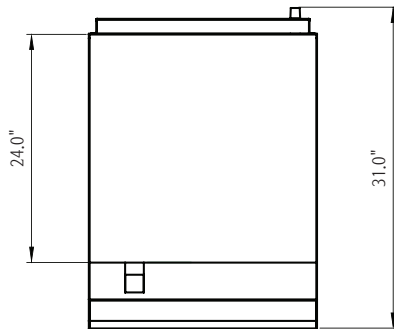

Top View



Front View

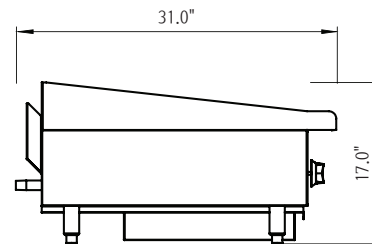

Side View

| Model | | MCCTG24A | MCCTG24A-P (Propane) |
|-------------------------------|-------------|-----------------------|-----------------------|
| Gas Output | BTU | 68,000 | 60,000 |
| | (KW) | 17.6 | 17.6 |
| Number of Burners | | 2 | 2 |
| Shipping Weight (Lbs) | | 264.6 | 264.6 |
| Manifold Pressure | Natural Gas | 4" W.C. | - |
| | Propane Gas | - | 10" W.C. |
| Manifold Size | | 3/4" | 3/4" |
| Burner Orifice Size | | 35/2.80mm | 52/1.60mm |
| Cooking Area (Sq. In.) | | 571.2 | 571.2 |
| Dimensions (W x D x H) | | 24.0" x 31.0" x 17.0" | 24.0" x 31.0" x 17.0" |
| Crated Dimensions (W x D x H) | | 29.1" x 37.8" x 20.5" | 29.1" x 37.8" x 20.5" |

Clearance requirements:

- For use only on non-combustible floors.
- Legs or casters are required for non-combustible floors.

| Clearance requirements | Combustible Surfaces | Non-combustible Surfaces |
|------------------------|----------------------|--------------------------|
| Rear | 6" ~ 8" | 0" |
| Left | 6" ~ 8" | 0" |
| Right | 6" ~ 8" | 0" |

Options and accessories



36-Inch Thermo Griddle ♦ MCCTG36A



Standard Features

- ♦ 102,000/90,000 BTU output
- ♦ 36.0" W x 24.0" D x 1" thick griddle plate
- ♦ Stainless Steel U-Shaped Burner
- ♦ Bullnose edge
- ♦ Easy to clean grease trap
- ♦ Heavy Duty Chrome Plated comfort grip knobs
- ♦ Embedded temperature probe for more accurate cooking and better performance

Exterior Features

- ♦ Stainless steel body and legs
- ♦ 6" Adjustable legs

Certified Safety Standard

- ♦ ETL Certified
- ♦ ETL Sanitation Listed




Warranty Information

- ♦ One year on-site Parts and Labor







36-Inch Thermo Griddle ♦ MCCTG36A

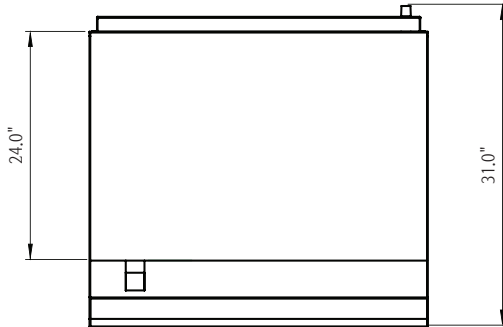

Top View



Front View

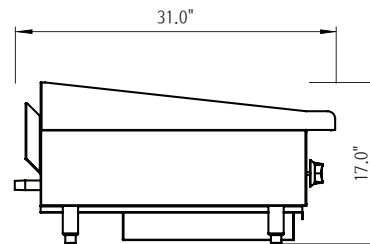

Side View

| Model | | MCCTG36A | MCCTG36A-P (Propane) |
|-------------------------------|-------------|-----------------------|-----------------------|
| Gas Output | BTU | 102,000 | 90,000 |
| | (KW) | 26.4 | 26.4 |
| Number of Burners | | 3 | 3 |
| Shipping Weight (Lbs) | | 374.9 | 374.9 |
| Manifold Pressure | Natural Gas | 4" W.C. | - |
| | Propane Gas | - | 10" W.C. |
| Manifold Size | | 3/4" | 3/4" |
| Burner Orifice Size | | 35/2.80mm | 52/1.60mm |
| Cooking Area (Sq. In.) | | 856.8 | 856.8 |
| Dimensions (W x D x H) | | 36.0" x 31.0" x 17.0" | 36.0" x 31.0" x 17.0" |
| Crated Dimensions (W x D x H) | | 40.9" x 37.8" x 20.5" | 40.9" x 37.8" x 20.5" |

Clearance requirements:

- For use only on non-combustible floors.
- Legs or casters are required for non-combustible floors.

| Clearance requirements | Combustible Surfaces | Non-combustible Surfaces |
|------------------------|----------------------|--------------------------|
| Rear | 6" ~ 8" | 0" |
| Left | 6" ~ 8" | 0" |
| Right | 6" ~ 8" | 0" |

Options and accessories



48-Inch Thermo Griddle ♦ MCCTG48A



Standard Features

- ♦ 136,000/120,000 BTU output
- ♦ 48.0" W x 24.0" D x 1" thick griddle plate
- ♦ Stainless Steel U-Shaped Burner
- ♦ Bullnose edge
- ♦ Easy to clean grease trap
- ♦ Heavy Duty Chrome Plated comfort grip knobs
- ♦ Embedded temperature probe for more accurate cooking and better performance

Exterior Features

- ♦ Stainless steel body and legs
- ♦ 6" Adjustable legs

Certified Safety Standard

- ♦ ETL Certified
- ♦ ETL Sanitation Listed




Warranty Information

- ♦ One year on-site Parts and Labor







48-Inch Thermo Griddle ♦ MCCTG48A

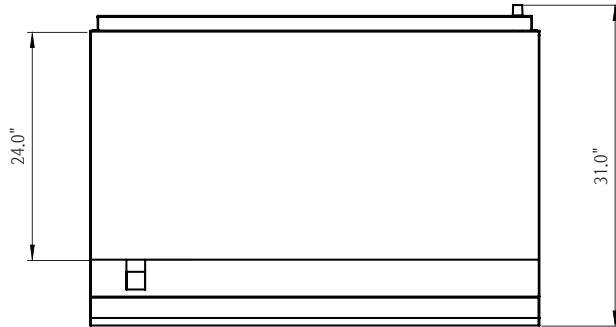

Top View

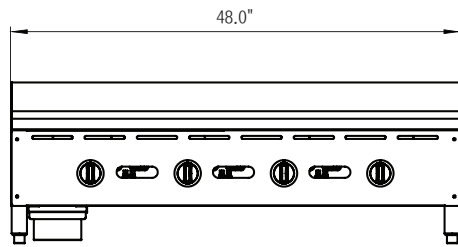

Front View

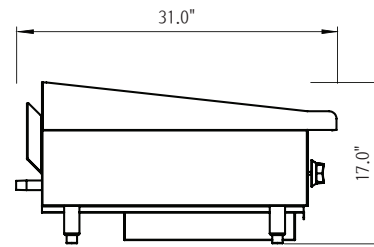

Side View

| Model | | MCCTG48A | MCCTG48A-P (Propane) |
|-------------------------------|-------------|-----------------------|-----------------------|
| Gas Output | BTU | 136,000 | 120,000 |
| | (KW) | 35.2 | 35.2 |
| Number of Burners | | 4 | 4 |
| Shipping Weight (Lbs) | | 485.1 | 485.1 |
| Manifold Pressure | Natural Gas | 4" W.C. | - |
| | Propane Gas | - | 10" W.C. |
| Manifold Size | | 3/4" | 3/4" |
| Burner Orifice Size | | 35/2.80mm | 52/1.60mm |
| Cooking Area (Sq. In.) | | 1140 | 1140 |
| Dimensions (W x D x H) | | 48.0" x 31.0" x 17.0" | 48.0" x 31.0" x 17.0" |
| Crated Dimensions (W x D x H) | | 52.8" x 37.8" x 20.5" | 52.8" x 37.8" x 20.5" |

Clearance requirements:

- For use only on non-combustible floors.
- Legs or casters are required for non-combustible floors.

| Clearance requirements | Combustible Surfaces | Non-combustible Surfaces |
|------------------------|----------------------|--------------------------|
| Rear | 6" ~ 8" | 0" |
| Left | 6" ~ 8" | 0" |
| Right | 6" ~ 8" | 0" |

Options and accessories