

KIL640/642/643/646/
647/648/649/655(-S)




	Mounting Pattern 200 x 200 up to 600 x 400mm		Max Load 75lb (34kg)
--	---	--	-----------------------------------

Wall Kiosk Enclosure

Fits 40", 42", 43", 46", 47", 48", 49" and 55" Displays up to 2" (50mm) Thick

Peerless-AV's Wall Kiosk Enclosure provides a sleek digital showcase for advertising, entertaining, interactive wayfinding, and much more. These innovative kiosk enclosures accommodate a wide variety of ultra-thin displays in either landscape (KIL models) or portrait (KIP models) orientation. Despite the slim, ADA-compliant 3.97" profile, the kiosk enclosure can easily house media players, fans and other electrical equipment needed to create an impressive digital solution. From hotels to casinos to movie theaters, Peerless-AV's Wall Kiosk Enclosures are ideal for applications that want to take the guest experience up a notch and differentiate their brand.

- Eight way tool-less adjustment to quickly position display in kiosk window for flush alignment
- VESA® 200 x 200 up to 400 x 600mm compatible
- Thermostat controlled circulation fans ensure proper airflow within the kiosk
- Low profile design extends 3.97" (101mm) away from the wall, which meets the Americans with Disabilities Act (ADA) certification requirements
- Hinged top frame offers easy access to the display and other internal components for easy maintenance and enhanced security
- Supports wide range of aesthetic options including glass/acrylic, multiple colors, vinyl wraps, etc. to best match environment or promote brand strategy
- Pre-assembled to simplify installation of the entire solution
- Custom sizes available for smaller and larger displays

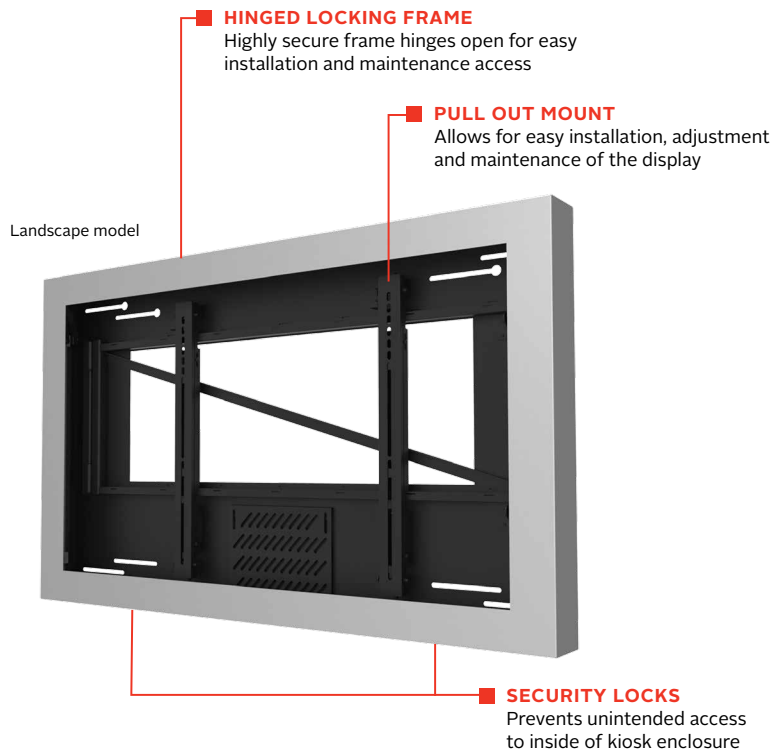

Portrait models available



Pull out mount for easy installation of display



Please visit peerless-av.com/en-us/patents for patent information.

Model Numbers

WARRANTY: 5 years on metal components, 1 year on electronic components

Landscape Models:

KIL640(-S) Wall Kiosk Enclosure fits 40" Displays up to 2" (50mm) Thick
KIL642(-S) Wall Kiosk Enclosure fits 42" Displays up to 2" (50mm) Thick
KIL643(-S) Wall Kiosk Enclosure fits 43" Displays up to 2" (50mm) Thick
KIL646(-S) Wall Kiosk Enclosure fits 46" Displays up to 2" (50mm) Thick

KIL647(-S) Wall Kiosk Enclosure fits 47" Displays up to 2" (50mm) Thick
KIL648(-S) Wall Kiosk Enclosure fits 48" Displays up to 2" (50mm) Thick
KIL649(-S) Wall Kiosk Enclosure fits 49" Displays up to 2" (50mm) Thick
KIL655(-S) Wall Kiosk Enclosure fits 55" Displays up to 2" (50mm) Thick

Product Specifications

	DIMENSIONS (W x H x D)	PRODUCT WEIGHT	LOAD CAPACITY	FINISH	AVAILABLE COLORS
KIL640/642/643(-S)	43.50" x 27.00" x 3.97" (1105 x 686 x 101mm)	55.6lb (25kg)	75lb (34kg)	Powder Coat	KIL640/642/643/646/647/648/649/655: Gloss black KIL640-S/642-S/643-S/646-S/647-S/648-S/649-S/655-S: Silver
KIL646/647/648(-S)	48.00" x 29.00" x 3.97" (1219 x 737 x 101mm)	61.8lb (28kg)			
KIL649/655(-S)	56.00" x 34.10" x 3.97" (1422 x 866 x 101mm)	75.5lb (34kg)			

Package Specifications

	PACKAGE SIZE (W x H x D)	PACKAGE SHIP WEIGHT	PACKAGE UPC CODE		PACKAGE CONTENTS	UNITS IN PACKAGE
KIL640/642/643(-S)	50.00" x 36.00" x 8.00" (1270 x 914 x 203mm)	85lb (39kg)	KIL640: 735029296904 KIL642: 735029297444 KIL643: 735029315674	KIL640-S: 735029296959 KIL642-S: 735029297437 KIL643-S: 735029315704	Kiosk with display mounting hardware	1
KIL646/647/648(-S)	54.00" x 39.00" x 8.00" (1371 x 990 x 203mm)	95lb (43kg)	KIL646: 735029296911 KIL647: 735029296928 KIL648: 735029307662	KIL646-S: 735029296973 KIL647-S: 735029296980 KIL648-S: 735029307891		
KIL649/655(-S)	62.00" x 43.00" x 8.00" (1574 x 1092 x 203mm)	105lb (48kg)	KIL649: 735029318705 KIL655: 735029308072	KIL649-S: 735029318767 KIL655-S: 735029308089		


Accessories

ACC415: 4-pack Metal Stud Fastener Kit
CL-SCG200: Screen Cleaning Gel
DEB-HD10: 32' (10m) High Speed HDMI® Cables with Ethernet
PVP1000-PL6: Surge Protector with Six Outlets



KioskBuilder™:

Build your own Integrated Kiosk @ kiosks.peerless-av.com including integration services, flat panel display, media player, content management software, power protection, thermal management, display protection, vinyl graphics, etc.

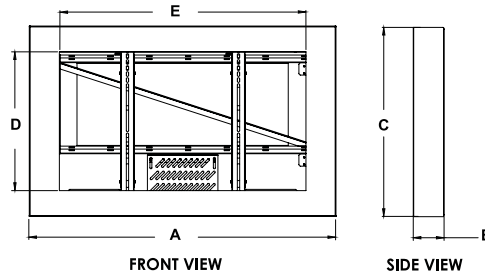

All dimensions = inch (mm)

MODEL NO.	DIMENSION "A"	DIMENSION "B"	DIMENSION "C"	DIMENSION "D"	DIMENSION "E"
KIL640	43.50" (1105mm)	3.97" (101mm)	27.00" (686mm)	19.67" (500mm)	34.97" (888mm)
KIL642	43.50" (1105mm)	3.97" (101mm)	27.00" (686mm)	20.65" (525mm)	36.72" (933mm)
KIL643	43.50" (1105mm)	3.97" (101mm)	27.00" (686mm)	21.13" (537mm)	37.59" (955mm)
KIL646	48.00" (1219mm)	3.97" (101mm)	29.00" (737mm)	22.61" (574mm)	40.20" (1021mm)
KIL647	48.00" (1219mm)	3.97" (101mm)	29.00" (737mm)	23.10" (587mm)	41.07" (1043mm)
KIL648	48.00" (1219mm)	3.97" (101mm)	29.00" (737mm)	23.59" (599mm)	41.94" (1065mm)
KIL649	56.00" (1422mm)	3.97" (101mm)	34.10" (866mm)	24.08" (611mm)	42.82" (1087mm)
KIL655	56.00" (1422mm)	3.97" (101mm)	34.10" (866mm)	27.03" (686mm)	48.05" (1220mm)

Architect Specifications

The Wall Kiosk Enclosure shall be a Peerless-AV model KIL640(-S), 642(-S), 643(-S), 646(-S), 647(-S), 648(-S), 649(-S) or 655(-S) and shall be located where indicated on the plans. Assembly and installation shall be done according to instructions provided by the manufacturer.

Visit peerless-av.com to see the complete line of AV solutions from Peerless-AV, including outdoor displays, kiosks, digital audio, display mounts, projector mounts, carts/stands, and a full assortment of accessories.

Peerless-AV
 2300 White Oak Circle
 Aurora, IL 60502 USA
(800) 865-2112
(630) 375-5100
Fax: (800) 359-6500

Peerless-AV Europe
 Unit 3 Watford Interchange
 Colonial Way, Watford
 Herts, WD24 4WP
 United Kingdom
+44 (0) 1923 200100
Fax: +44 (0) 1923 200101

Peerless-AV Latin America
 Av. de las Industrias 413
 Parque Industrial Escobedo
 General Escobedo, N.L.,
 México, 66062
+52 (81) 8384-8300
Fax: +52 (81) 8384-8360

peerless-AV[®]
 Driving Technology Through Innovation

LIT-1629 rev.1