

RMI2W




Max load
175lb (79kg)

Rotational Mount Interface for Wall Mounts

FOR ROTATING DISPLAYS FROM LANDSCAPE TO PORTRAIT

The RMI2W allows you to rotate a display from landscape to portrait orientation with a simple pull of the spring-loaded lever, eliminating the hassle of having to remove the screen from the mount. This mount interface enables a display to be easily rotated and set at 15-degree increments within 360-degrees, and is compatible with a variety of Peerless-AV® Wall Mounts. Ideal for standard or creative digital signage displays, the RMI2W allows for endless screen positioning.

- Rotate landscape to portrait orientation without removing the screen
- Roll angle can be locked in 15° increments, creating endless screen positioning possibilities
- Screen can be rolled 360° without impediment, no tools required
- Tamper-resistant, spring-loaded lever with pull cord makes adjusting the screen's position simple
- Low-profile design adds only 1.3" to any application
- Compatible with the following Peerless-AV® Mounts: SA740P, SA746PU, SA752PU, SA761PU, SA771PU, SAX755PU, SAX762PU, SAX772PU, SF16D, ST16D, PLCM-1, PLCM-2, PLCM-4, PLCK-1, MOD-FPMS, MOD-FPMD2, PLCM-1CP, PLCM-UNL, PLCM-2-UNL, PLCK-UNL, PLCM-UNL-CP, PLP-UNM, PLP-UNL and PLP-V%

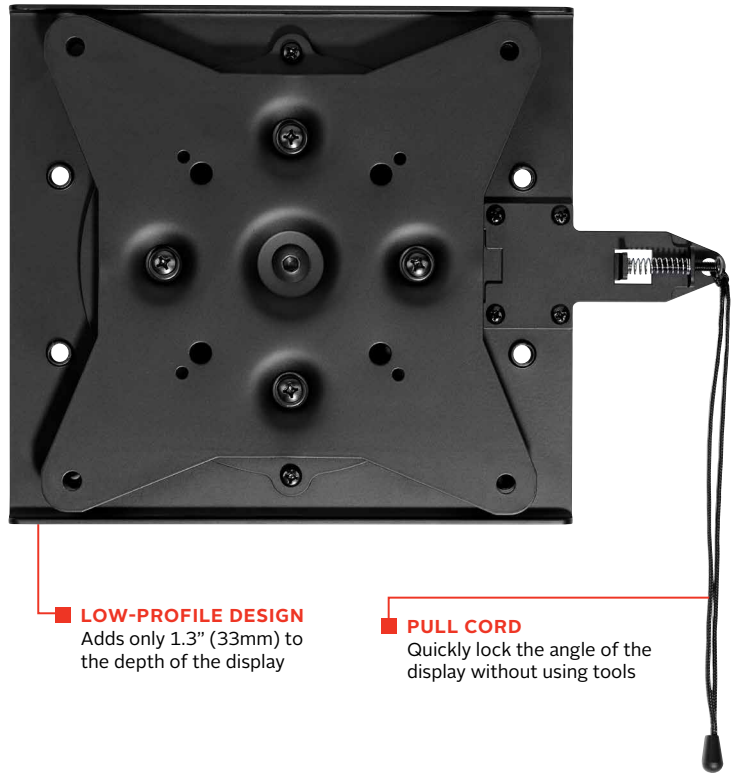

LOW-PROFILE DESIGN
Adds only 1.3" (33mm) to the depth of the display

PULL CORD
Quickly lock the angle of the display without using tools



RoHS
COMPLIANT

RMI2W	Rotational Mount Interface for Wall Mounts
--------------	--

Product Specifications

	DIMENSIONS (W x H x D)	PRODUCT WEIGHT	LOAD CAPACITY	FINISH	AVAILABLE COLORS
RMI2W	14.16" x 9.50" x 1.31" (360 x 241 x 33mm)	8.53lb (3.87kg)	175lb (79kg)	Powder Coat	Black


Package Specifications

	PACKAGE SIZE (W x H x D)	PACKAGE SHIP WEIGHT	PACKAGE UPC CODE	PACKAGE CONTENTS	UNITS IN PACKAGE
RMI2W	20.00" x 10.00" x 1.75" (508 x 254 x 44mm)	9.1lb (4.13kg)	735029315452	1 Rotational Mount 1 Wall Mount Interface Plate	1

Compatible with the following Peerless-AV® Mounts:

SA740P	SAX762PU	PLCM-4	PLCM-2-UNL
SA746PU	SAX772PU	PLCK-1	PLCK-UNL
SA752PU	SF16D	MOD-FPMS	PLCM-UNL-CP
SA761PU	ST16D	MOD-FPMD2	PLP-UNM
SA771PU	PLCM-1	PLCM-1CP	PLP-UNL
SAX755PU	PLCM-2	PLCM-UNL	PLP-V%

All dimensions = inch (mm)

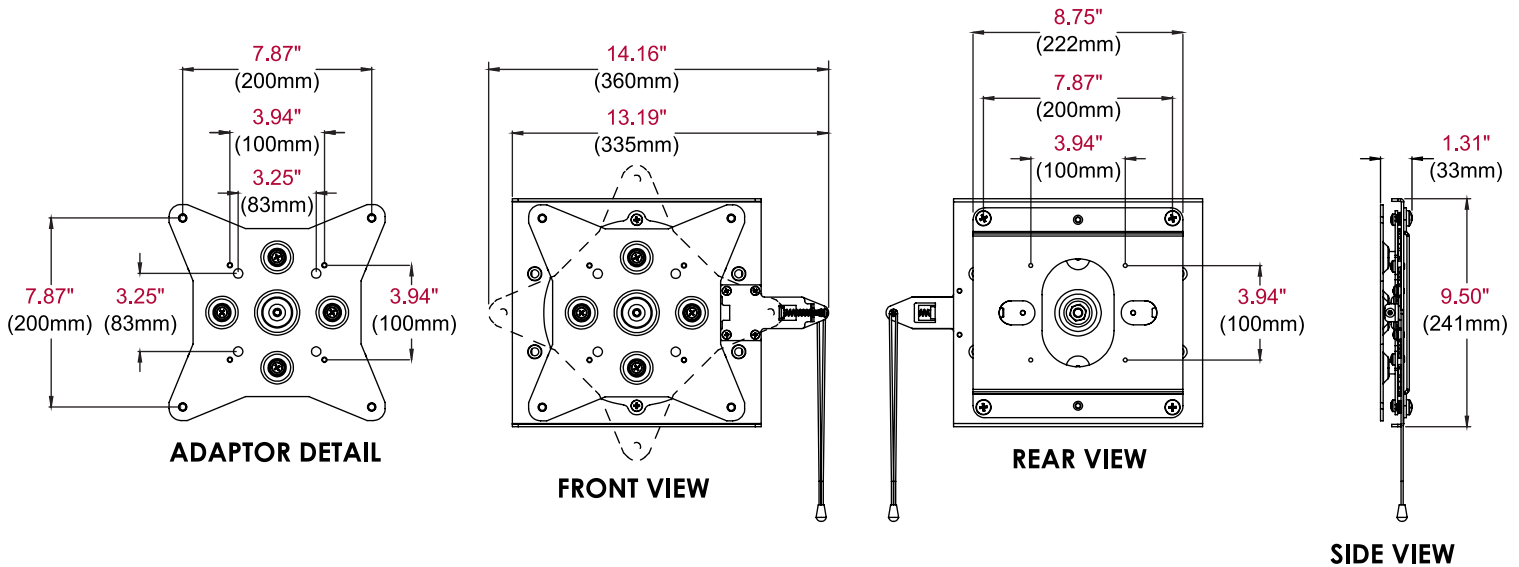

Architect Specifications

The Rotational Mount Interface for Wall Mounts shall be a Peerless-AV® model RMI2W and shall be located where indicated on the plans. Assembly and installation shall be done according to instructions provided by the manufacturer.

Visit peerless-av.com to see the complete line of AV solutions from Peerless-AV, including outdoor displays, wireless, kiosks, digital audio, display mounts, projector mounts, carts/stands, and a full assortment of accessories.

Peerless-AV
2300 White Oak Circle
Aurora, IL 60502 USA
(800) 865-2112
(630) 375-5100
Fax: (800) 359-6500

Peerless-AV EMEA
Unit 3 Watford Interchange
Colonial Way, Watford
Herts, WD24 4WP
United Kingdom
+44 (0) 1923 200100
Fax: +44 (0) 1923 200101

Peerless-AV Latin America
Ave de las Industrias 413
Parque Industrial Escobedo
Escobedo, N.L.,
Mexico 66062
+52 (81) 8384-8300
Fax: +52 (81) 8384-8360

