



The ACC556 Cathedral Ceiling Adapter can be attached to a finished ceiling (wood joists above drywall) using the two washer head wood screws included, or a structural ceiling (concrete) using concrete anchor accessory kit ACC200 (sold separately).



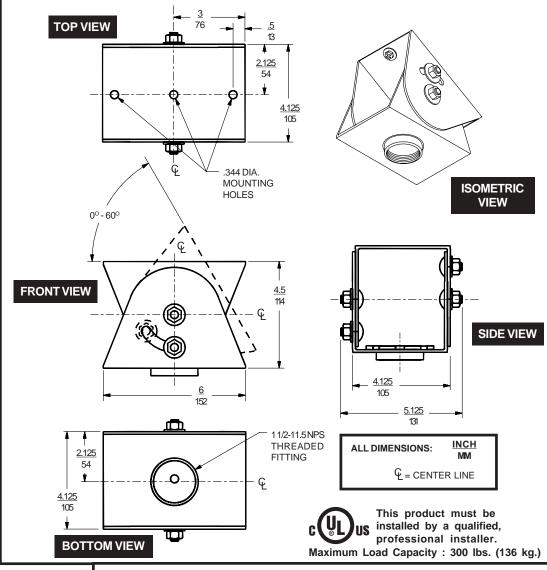

## **Architects specifications:**

The Cathedral Ceiling Adapter shall be a Peerless model **ACC556** and shall be attached where indicated on the plans. It shall have a 1 1/2 - 11.5 NPS threaded fitting to accept a Peerless flush mount tube or extension column. It shall be constructed of 12 gauge cold rolled steel and finished in white fused epoxy. Assembly and installation shall be done according to the instructions provided by the manufacturer.

## TECHNICAL DATA SHEET CATHEDRAL CEILING ADAPTER

## Peerless Industries, Inc.


3215 W. North Ave. phone: (708) 865-8870 Melrose Park, IL 60160 fax: (708) 865-2941

ISSUED: 3-12-97 SHEET NO:128-9511-1 8-18-03

page 1 of 2

Jumbo Mount attaches to ACC556 with flush mount tube or extension column. Flush mount tube is included with Jumbo Mount. Various lengths of extension columns are available. Adjustable length extension columns are also available.

The ceiling to which the ceiling plate is attached must be capable of carrying four times the combined weight of all components (Jumbo Mount, extension column, etc.) and equipment (monitor, VCR, etc.).

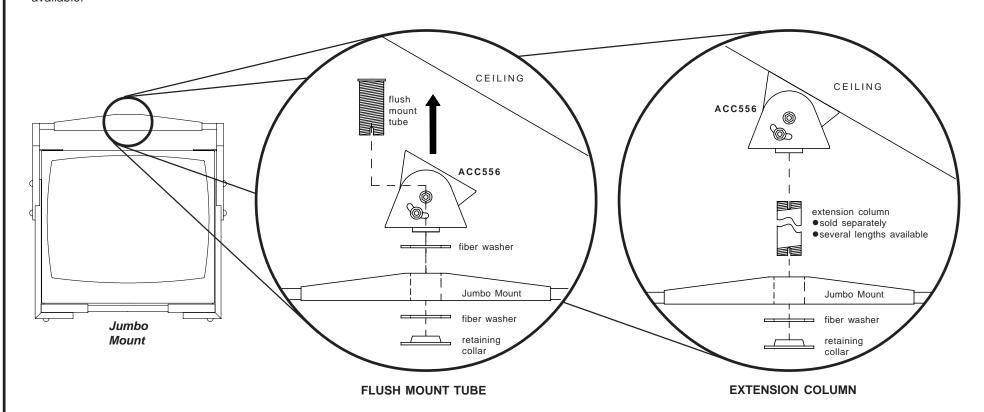

MODEL ACC556 CATHEDRAL CEILING ADAPTER FOR JUMBO MOUNTS-SPECIFICATIONS				
	* Shipping	Max. Load Capacity		
Weight	Weight	Concrete	Wood	Compatible Jumbo Mount Models
4 lb (1.8kg)	4.6 lb (2.1 kg)	300 lb (137 kg)	300 lb (137 kg)	JM 630, JM 640, JM 640D, JM 650, JM 650D, JM 655, JM 660, JM 665, JM 670, JM 675

\* Shipping weight based on single unit shipment. Per unit shipping weight may be less for bulk orders.

WARNING: WEIGHT OF TV or MONITOR NOT TO EXCEED MAXIMUM LOAD CAPACITY!