

DS-VW755S



Display size
40"-65"



Max load
80lb (36.4kg)

Additional Features

- ✓ Offers ADA compliance when mounting displays measuring $\leq 2.0''$ deep
- ✓ Quick release pop out mechanism provides convenient display access in recessed applications
- ✓ Quick release can be disabled with a locking screw to prevent unintentional pop-outs
- ✓ Display extends into a negative tilt position for ease of service
- ✓ Tool-less micro-adjustments at 8 points allows the mount to overcome uneven walls to create a seamless video wall display
- ✓ Accommodates displays in landscape and portrait orientation
- ✓ Reusable custom wall plate spacers eliminate the guesswork and on-site installation calculations
- ✓ Modular mount for unlimited video wall display configurations
- ✓ Integrated cable management tie-backs make display-to-display cabling simple
- ✓ VESA® 200 x 200 up to 400 x 400mm compliant

SMARTMOUNT.

Full Service Thin Video Wall Mount with Quick Release

FOR 40" TO 65" DISPLAYS

The DS-VW755S Slim Full Service Video Wall Mount with Quick Release offers an easy to install solution for landscape and portrait applications. When overall video wall depth is a concern, the DS-VW755S provides ADA compliance when mounting displays measuring 2" deep or less. Designed for quick service access in recessed video wall applications, the DS-VW755S provides versatility demanded by today's integrator. Tool-less micro adjustment at eight points allows the mount to overcome uneven walls, creating a seamless video wall display. Easy display access and quick serviceability make this mount the ultimate video wall mounting solution.

The DS-VW755's quick-release functionality provides quick serviceability and convenient display access in recessed applications.



■ **ADA COMPLIANT**
When mounting displays measuring $\leq 2.0''$ deep

■ **REUSABLE CUSTOM WALL SPACERS**
Eliminate guesswork and on-site installation calculations

■ **UNIVERSAL DESIGN**
Accommodates landscape and portrait displays

■ **EASE OF SERVICE**
Display extends into a negative tilt position

■ **NO TOOLS REQUIRED FOR MICRO-ADJUSTMENT**
Tool-less micro-adjustments at 8 points

■ **QUICK RELEASE MECHANISM**
Convenient display access in recessed applications



RoHS

MADE IN USA

DS-VW755S	SmartMount® Full Service Thin Video Wall Mount with Quick Release for 40" -65" Displays
-----------	---

Product Specifications

	DIMENSIONS (W x H x D)	PRODUCT WEIGHT	LOAD CAPACITY	FINISH	AVAILABLE COLORS
DS-VW755S	20.45" x 20.00" x 1.88"-2.63" (519 x 508 x 48-67mm)	18.0lb (8.2kg)	80lb (36.4kg)	Textured	Black


Package Specifications

	PACKAGE SIZE (W x H x D)	PACKAGE SHIP WEIGHT	PACKAGE UPC CODE	PACKAGE CONTENTS	UNITS IN PACKAGE
DS-VW755S	22.25" x 22.00" x 5.625" (565 x 559 x 143mm)	24.5lb (11.1kg)	735029302438	Wall mount assembly, mounting attachment rails, fasteners	1

Accessories

ACC-V800X:	Adaptor for VESA® 600 x 400 and 800 x 400mm mounting patterns
ACC-DHK:	Display Handling Kit
ACC-DHP6:	Display Handling Kit Replacement Pads - 6pk
ACC-V600800:	Ultra Thin VESA® 600 x 400mm Adaptor
DS-VWSXXX (-SL) (-SP):	Reusable display dedicated spacers

All dimensions = inch (mm)

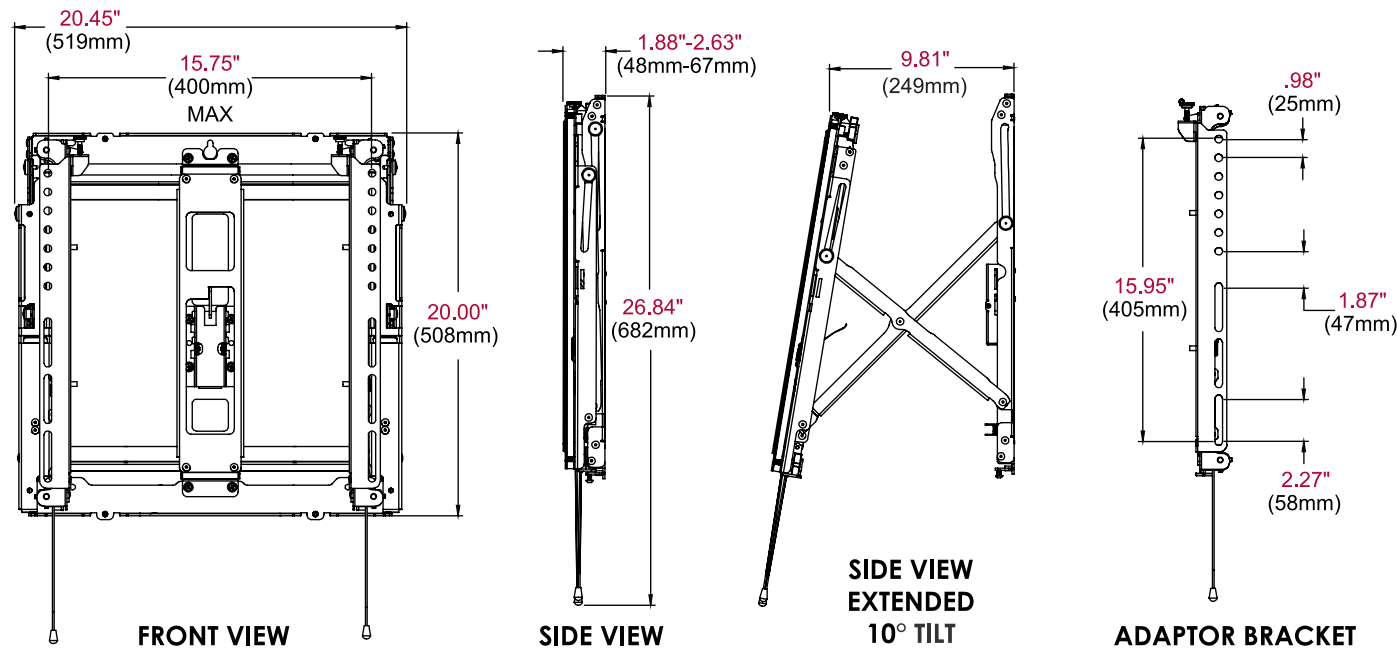

Architect Specifications

The Smartmount® Full Service Thin Video Wall Mount with Quick Release shall be a Peerless-AV model DS-VW755S and shall be located where indicated on the plans. Assembly and installation shall be done according to instructions provided by the manufacturer.

Visit peerless-av.com to see the complete line of AV solutions from Peerless-AV, including outdoor displays, wireless, kiosks, digital audio, display mounts, projector mounts, carts/stands, and a full assortment of accessories.

Peerless-AV
2300 White Oak Circle
Aurora, IL 60502 USA
(800) 865-2112
(630) 375-5100
Fax: (800) 359-6500

Peerless-AV Europe
Unit 3 Watford Interchange
Colonial Way, Watford
Herts, WD24 4WP
United Kingdom
+44 (0) 1923 200100
Fax: +44 (0) 1923 200101

Peerless-AV de México
Ave de las Industrias 413
Parque Industrial Escobedo
Escobedo, N.L.,
Mexico 66050
+52 (81) 8384-8300
Fax: +52 (81) 8384-8360

