DS-VW765-LQR





Display size **46"-65"**





Additional Features

- Quick release pop out mechanism provides convenient display access in recessed applications
- Quick release can be disabled with a locking screw to prevent unintentional pop-outs
- Carriage extension force can be adjusted to accommodate the weight of the display, allowing the quick release to activate with gentle force
- Modular mount for unlimited video wall display configurations
- Custom wall plate spacers eliminate the guesswork and on-site installation calculations
- Tool-less micro-adjustments at 8 points allows the mount to overcome uneven walls to create a seamless video wall display
- Pull-out/prop-open mechanism provides quick service access
- Integrated cable management tie-backs make display-todisplay cabling simple

SMARTMOUNT:

Full-Service Video Wall Mount with Quick Release - Landscape

FOR 46" TO 65" DISPLAYS

Video walls should be easy to configure, quick to install, and a snap to maintain. The DS-VW765-LQR Full-Service Video Wall Mount with a Quick Release from Peerless-AV is designed for quick service access in recessed video wall applications. It provides versatility demanded by installers. With the quick-release functionality, users have the ability to articulate the display from the wall by gently pressing on the front of the display. The DS-VW765-LQR has a no-tool-required micro-adjustment feature and provides easy-access to any display, creating the ideal video wall. The custom wall plate spacers eliminate guesswork and on-site installation calculations and measurements, reducing installation time and cost. This innovative design, combined with a ready-to-install mount, makes this the fastest video wall installation. Loaded with time saving features, this Full-Service Video Mount is the ultimate video wall mounting solution.

The DS-VW765-LQR's pop-out mechanism provides easy-access and quick serviceability, so you can achieve a seamless video wall in no time.



NO TEDIOUS CALCULATIONS NO GUESSWORK

Custom wall plate spacers eliminate the guesswork and on-site installation calculations

QUICK RELEASE MECHANISM

Provides convenient display access in recessed applications

ADJUSTABLE CARRIAGE EXTENSION FORCE

Adjustable to the weight of the display, allowing the quick release to activate with gentle force



Full-service quick release access



FOR MICRO-ADJUSTMENT

Simple, tool-less microadjustments

at 8 points seamlessly align the displays

Tool-less micro adjustments



Wall plate spacers (sold separately)



DS-VW765-LQR

SmartMount® Full Service Video Wall Mount with Quick Release - Landscape for 46" -65" Displays

Product Specifications


	DIMENSIONS (W x H x D)	PRODUCT WEIGHT	LOAD CAPACITY	FINISH	AVAILABLE COLORS
DS-VW765-LQR	35.59" x 21.37" x 3.08"-3.83" (904 x 543 x 78-97mm)	35lb (15.9kg)	125lb (56.8kg)	Textured	Black

Package Specifications

	PACKAGE SIZE (W x H x D)	PACKAGE SHIP WEIGHT	PACKAGE UPC CODE	PACKAGE CONTENTS	UNITS IN PACKAGE
DS-VW765-LQR	36.25" x 23.25" x 4.75" (921 x 591 x 121mm)	39lb (17.6kg)	735029300847	Wall mount assembly, mounting attachment rails, fasteners	1

Accessories

DS-VWS###: Wall Plate Alignment Spacers

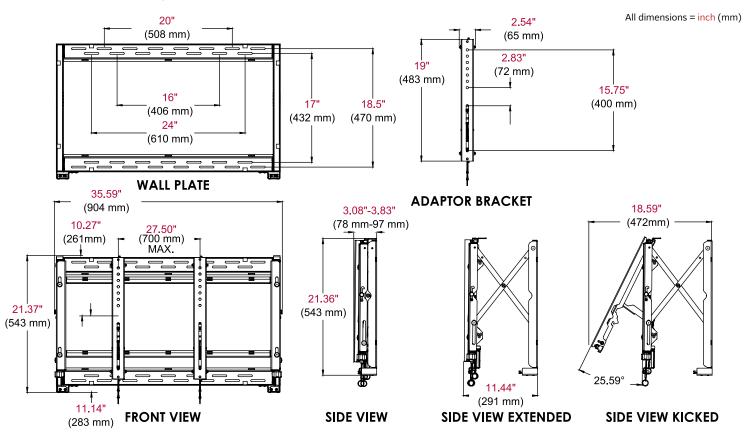

Architect Specifications

The Smartmount® Full-Service Video Wall Mount with Quick Release - Landscape shall be a Peerless-AV model DS-VW765-LQR and shall be located where indicated on the plans. Assembly and installation shall be done according to instructions provided by the manufacturer.

Visit peerless-av.com to see the complete line of AV solutions from Peerless-AV, including outdoor displays, wireless, kiosks, digital audio, display mounts, projector mounts, carts/stands, and a full assortment of accessories.

Peerless-AV

2300 White Oak Circle Aurora, IL 60502 USA

(800) 865-2112 (630) 375-5100 Fax: (800) 359-6500

Peerless-AV Europe

Unit 3 Watford Interchange Colonial Way, Watford Herts, WD24 4WP United Kingdom

+44 (0) 1923 200100 Fax: +44 (0) 1923 200101

Peerless-AV de México

Ave de las Industrias 413 Parque Industrial Escobedo Escobedo, N.L., Mexico 66050

+52 (81) 8384-8300 Fax: +52 (81) 8384-8360

