# HA746-STB



Display size **43"- 55"\*** 



Max load **80lb (36kg)** 

### **Additional Features**

- Easily installs on single and dual metal studs, wood or concrete (all fasteners included)
- ☑ Unique cable management system
- ☑ Covers can easily be removed for servicibility to STB/cable box without the need to remove arm or TV
- ☑ Compatible to many 43"-55" TVs, up to 400 x 400mm pattern\*
- ☑ Fits various STB/media boxes up to 13.5"W x 7.5"L x 1.6"D
- ☑ Compact enough to fit within a 24"W x 16"H wall opening (wall enclosure measures 23"W x 14.84" x 2.25")
- Open wall plate design for access to wall or junction box with 5" of lateral adjustment
- Front fastening covers for recessed areas
- ☑ Installs on wall, recessed in wall or on tech drop
- \* Display range noted is general. To see if a display size outside of this range will work, please consult with Peerless-AV Customer Care at 1-800-865-2112 about your specific TV model.

## © come RoHS


Please visit peerless-av.com/en-us/patents for patent information.

# Hospitality Wall Arm Mount with STB Enclosure

FOR 43" TO 55"\* TVS

The Hospitality Wall Arm Mount with Set Top Box (STB) Enclosure was designed with the Hospitality market in mind, offering installation flexibility and an aesthetically pleasing solution for cable management and electronic storage. This articulating wall mount can be installed easily on single and dual metal studs, wood or concrete and comes complete with attachment hardware. The enclosure provides a secure, vented storage area for electronics to avoid the mess of tangled cables and exposed cable boxes in guest rooms/public areas. For maintenance purposes, simply remove the tamper resistant screws and the enclosure covers can easily be removed, allowing for quick access to the STB without disturbing the TV or mount itself. Additionally, the mount's open wall plate design allows for easy access to the wall or junction box.

# The HA746-STB wall mount conceals the STB or cable box and provides a clean solution for cable management.

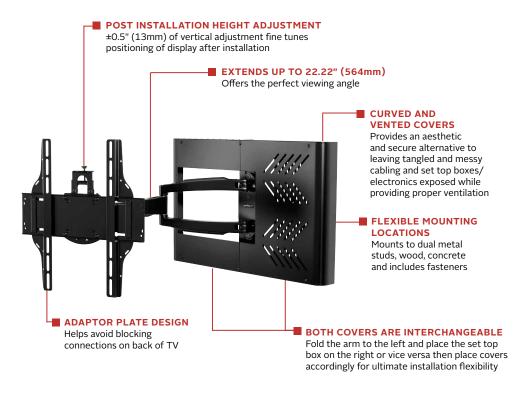



Slotted STB attachment plate allows a wide range of set top box models to zip tie into place.



Shown with vented STB cover removed. STB can be placed on either side of the mount.



Integrated cable management keeps cords and cables out of the way.



**HA746-STB** 

Hospitality Wall Arm Mount with STB Enclosure for 43" to 55"\* TVs

### **Product Specifications**


\* Display range noted is general. To see if a display size outside of this range will work, please consult with Peerless-AV Customer Care at 1-800-865-2112 about your specific TV model.

	DIMENSIONS (W x H x D)	PRODUCT WEIGHT	LOAD CAPACITY	FINISH	AVAILABLE COLORS
HA746-STB	23.00" x 16.75" x 3.97" (584 x 425 x 101mm)	21lb (9.5kg)	80lb (36kg)	Scratch Resistant Fused Epoxy	Semi-Gloss Black

### **Package Specifications**

	PACKAGE SIZE (W x H x D)	PACKAGE SHIP WEIGHT	PACKAGE UPC CODE	PACKAGE CONTENTS	UNITS IN PACKAGE
HA746-STB	28.50" x 19.80" x 5.00" (724 x 483 x 127mm)	25lb (11.3kg)	735029314226	Wall Mount, Wall Plate, Covers, Display Installation Hardware, Concrete, Wood and Metal Stud Attachment Hardware, Installation Instructions	1

All dimensions = inch (mm)

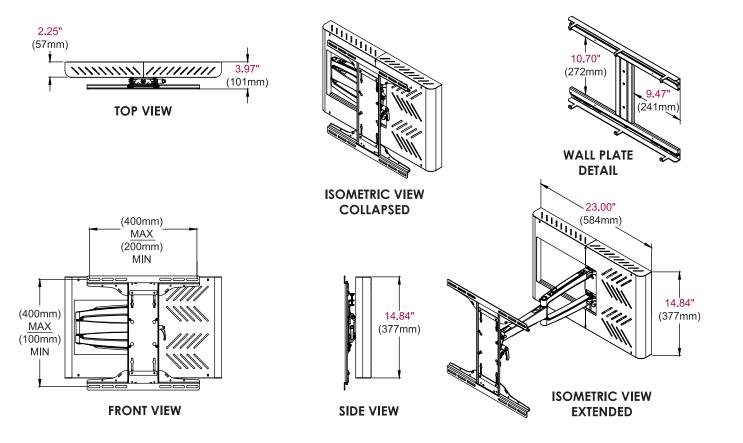

### **Architect Specifications**

The Hospitality Wall Arm Mount with STB Enclosure shall be a Peerless-AV model HA746-STB and shall be located where indicated on the plans. Assembly and installation shall be done according to instructions provided by the manufacturer.

Visit peerless-av.com to see the complete line of AV solutions from Peerless-AV, including outdoor displays, wireless, kiosks, digital audio, display mounts, projector mounts, carts/stands, and a full assortment of accessories.

### Peerless-AV

2300 White Oak Circle Aurora, IL 60502 USA

(800) 865-2112 (630) 375-5100 Fax: (800) 359-6500

### Peerless-AV Europe

Unit 3 Watford Interchange Colonial Way, Watford Herts, WD24 4WP United Kingdom

+44 (0) 1923 200100 Fax: +44 (0) 1923 200101

### Peerless-AV de México

Ave de las Industrias 413 Parque Industrial Escobedo Escobedo, N.L., Mexico 66050

+52 (81) 8384-8300 Fax: +52 (81) 8384-8360



LIT-1544 rev.1