

PLCK-UNL PLCK-1



Display size
up to 75"



Max load
125lb (57kg)

SMARTMOUNT.

Ceiling Mount with 1.5" NPS Coupler

FOR UP TO 75" DISPLAYS

Peerless-AV's PLCK flat panel ceiling mount products and components utilize a 1.5" NPT pipe for versatility, support and connection. The 1.5" NPT threaded pipe make it simple to customize each mount to your specific application. The PLCK-1 kit combines the PLCK-2 tilt box, fixed length 1.5" NPT column and 1.5" NPS coupler to easily retrofit existing installations. When combined with Peerless-AV's PLP-UNL universal or dedicated display adaptor, it provides the perfect combination for retrofitting flat panel ceiling mounts in sports facilities, airports, lobbies or retail environments.

For added convenience, the PLCK-UNL comes with Peerless-AV's PLP-UNL universal display adaptor, making it even easier to customize your mount and application.




Additional Features

- ✓ Includes a 1.5" NPS threaded coupling enabling retrofit to existing 1.5" NPT or NPS connections
- ✓ 0° to 20° adjustable tilt and 360° swivel
- ✓ Standard 1.5" NPT pipe included providing a 19.49" drop
- ✓ Simple hook-on display installation
- ✓ Universal models fit displays with mounting holes up to 730 x 405mm (28.75"W x 15.95"H)
- ✓ PLCK-1 requires universal or dedicated display adaptor plate to be purchased separately
- ✓ Mount display in landscape or portrait orientation with dedicated adaptor plates
- ✓ Integrated cable management protects, contains and conceals cables for a clean, professional installation



Dedicated model with 1.5" NPS Coupler, PLCK-1 (Display adaptor sold separately)



Dedicated Adaptor Plates. PLP-V models (For use with Dedicated models)



RoHS **MADE IN USA**

PLCK-1	SmartMount® Ceiling Mount for up to 75" Displays - Dedicated models with 1.5" NPS Coupler
PLCK-UNL	SmartMount® Ceiling Mount for up to 75" Displays - Universal models with 1.5" NPS Coupler

Product Specifications

	DIMENSIONS (W x H x D)	PRODUCT WEIGHT	LOAD CAPACITY	FINISH	AVAILABLE COLORS
PLCK-1	10.62" x 22.59" x 3.25" (270 x 574 x 83mm)	10.4lb (4.7kg)	125lb (57kg)	Powder Coat	Black
PLCK-UNL	30.75" x 30.35" x 4.33" (781 x 771 x 110mm)	17.5lb (8.0kg)			

Package Specifications


	PACKAGE SIZE (W x H x D)	PACKAGE SHIP WEIGHT	PACKAGE UPC CODE	PACKAGE CONTENTS	UNITS IN PACKAGE
PLCK-1	24.50" x 14.13" x 5.50" (622 x 358 x 140mm)	14.8lb (6.7kg)	735029248934	1.5" NPS coupler, extension column, tilt box, universal display adaptor, mounting hardware & instructions	1
PLCK-UNL	31.13" x 21.75" x 4.25" (791 x 552 x 108mm)	23.7lb (10.8kg)	735029248941	1.5" NPS coupler, extension column, tilt box, mounting hardware & instructions	

Accessories

- ACC, CMJ, DCS,**
- DCT Models:** Ceiling Plates
- AEC Models:** Adjustable Length Extension Columns
- EXT Models:** Fixed Length Extension Columns
- PLP-V models:** Dedicated Display Adaptor

- PLP-UNM(P)(-S):** Universal Display Adaptor for 22" to 46" Displays
- PLP-UNL(P)(-S):** Universal Display Adaptor for 32" to 75" Displays
- PLCM-2:** Tilt Box for up to 75" Displays
- PLCM-3:** Tilt Box for up to 29" Displays
- PLCM-4:** Stackable Tilt Box for up to 75" Displays

All dimensions = inch (mm)

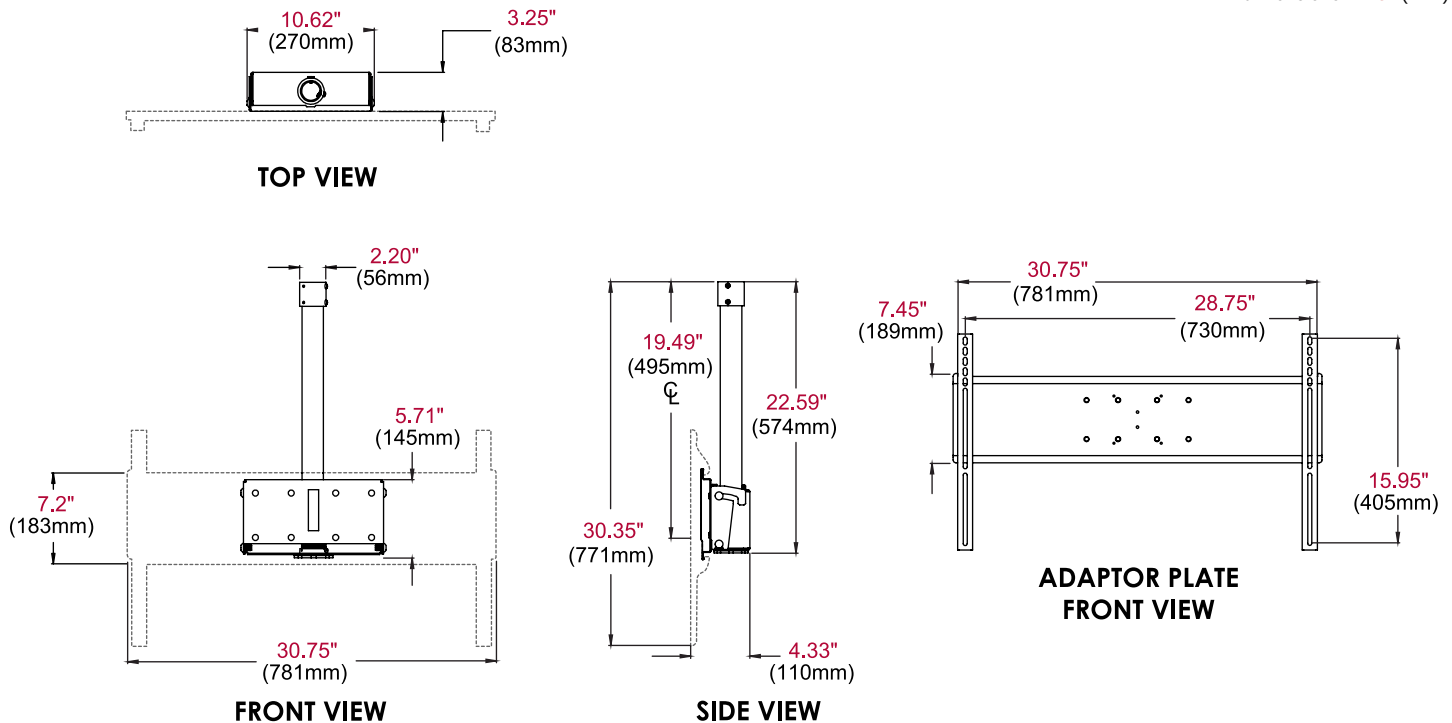

Architect Specifications

The Smartmount® Ceiling Mount shall be a Peerless-AV model PLCK-1 or PLCK-UNL and shall be located where indicated on the plans. Assembly and installation shall be done according to instructions provided by the manufacturer.

Visit peerless-av.com to see the complete line of AV solutions from Peerless-AV, including outdoor displays, wireless, kiosks, digital audio, display mounts, projector mounts, carts/stands, and a full assortment of accessories.

Peerless-AV
2300 White Oak Circle
Aurora, IL 60502 USA
(800) 865-2112
(630) 375-5100
Fax: (800) 359-6500

Peerless-AV Europe
Unit 3 Watford Interchange
Colonial Way, Watford
Herts, WD24 4WP
United Kingdom
+44 (0) 1923 200100
Fax: +44 (0) 1923 200101

Peerless-AV de México
Ave de las Industrias 413
Parque Industrial Escobedo
Escobedo, N.L.,
Mexico 66050
+52 (81) 8384-8300
Fax: +52 (81) 8384-8360

