


ESTIMATED WATER REMOVAL CAPACITY



FEATURES

	PROCD150	PROCD200
UPC	842149026912	842149026929
WATER REMOVAL CAPACITY (90°F, 90% RH)	150 pts./Day (19 gal./Day)	200 pts./Day (25 gal./Day)
WATER REMOVAL CAPACITY (80°F, 60% RH)	85 pts./Day (9.5 gal./Day)	95 pts./Day (12 gal./Day)
POWER SUPPLY	15AMP 115V	15AMP 115V
RATED POWER (W)	810	860
RATED CURRENT (A)	7.3	7.5
DEFROST TYPE	Hot Gas Bypass	Hot Gas Bypass
TIMER (hr.)	1-24	1-24
OPERATING TEMPERATURE	33°F – 100°F	33°F – 100°F
REFRIGERANT	R410A	R410A
WEIGHT (Net/Gross) (lbs.)	81/90	97/106
PRODUCT SIZE (WxHxD) (in.)	20 x 32 x 19	21 x 32½ x 20
PACKAGE SIZE (WxHxD) (in.)	22 x 34 x 21	23½ x 35 x 22
DRAIN HOSE LENGTH (ft.)	40	40
WASHABLE AIR FILTER	Yes	Yes

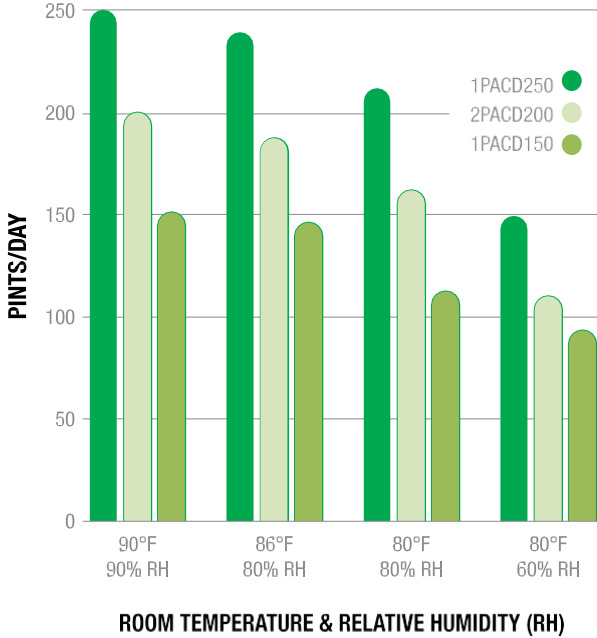

COMMERCIAL APPLICATIONS

- Manufacturing, printing, or packing/shipping facility
- Warehouses and records/media storage rooms
- Indoor pools, health clubs, and gymnasiums
- Hospitals & pharmaceutical labs
- Temporary office or school trailers
- Computer rooms
- Supermarkets, restaurants and bakery
- Large plants (water treatment, power, etc.)
- Museums, libraries, and art galleries
- Large basement or attic
- Any area affected by humidity from flooding, water leakage, or natural disasters
- Green houses