

PTZOptics 30X Move 4K

The PTZOptics Move 4K offers built-in auto-tracking at resolutions up to 4K at 60fps (1080p at 60fps over 3G-SDI) and features a built-in tally light. Available outputs include SDI, HDMI, USB, and NDI@HX 3 for unrivaled performance and versatility. Compatible with most video production software, including OBS, vMix, Wirecast and more.


<http://ptzoptics.com/move-4k>

Key Features:

- UltraHD 4K (3840x2160p) video resolutions up to 60 FPS
- Built-in auto-tracking capabilities
- 30X optical zoom lens with a 59.2° horizontal field of view
- Sony sensors offer high performance in low light scenarios with Wide Dynamic Range
- 3D noise reduction with our latest "low noise CMOS sensor"
- Serial (RS232 & RS485) & IP control (LAN/WAN)
- H.264, H.265, & MJPEG video compression when IP streaming
- Simultaneous USB 2.0, HDMI 2.0 / 3G-SDI, NDI@HX 3 / IP streaming (SRT, RTSP, RTMP) (HDMI & SDI are not simultaneous)
- PoE+ (Power over Ethernet) or 12VDC power supply
- Built in tally light
- Photobooth capable
- 5-year warranty

What's in the Box:

- Camera
- AC Power Supply
- USB A-A Cable
- RS232 Cable
- Quick Start Guide
- IR Remote
- 2 AA Batteries

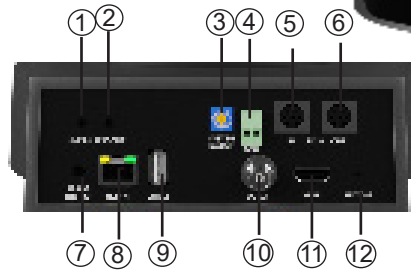








1. Line in
2. Line Out
3. Resolution Dial
4. RS485 Interface
5. RS232 IN Interface
6. RS232 OUT interface
7. DC 12V
8. LAN (PoE)
9. USB 2.0
10. 3G-SDI Interface
11. HDMI
12. Restore








Image Sensor & Lens	
Video Sensor	Sony, 1/1.8 inch, CMOS, Effective pixels: 8.42M
Resolution and Frame Rate	HDMI: 3840x2160p-60/59.94/50/30/29.97/25, 1920x1080p-60/59.94/50/30/29.97/25, 1920x1080i-60/59.94/50, 1280x720p-60/59.94 SDI: 1920x1080p-60/59.94/50/30/29.97/25, 1920x1080i-60/59.94/50, 1280x720p-60/59.94
Digital Zoom	Off (3840x2160), 2X (1920x1080), 3X (1280x720), 4X, (960x540), 8X (480x270), 16X (256x144)
Field of View	Horizontal: 2.5° (tele) ~ 59.2° (wide), Vertical: 1.4° (tele) ~ 34.6° (wide)
Min Lux	0.5 Lux @ (F1.8, AGC ON)
Shutter	1/30s ~ 1/10000s
Lens	f = 7.1mm ~ 210mm, F1.61 ~ F5.19
Pan / Tilt Movement	
Pan Movement	±170°
Pan Speed	1.7° ~ 100°/s
Tilt Movement	+90° to -30°
Tilt Speed	1.7° ~ 69.9°/s
Presets	255 Presets
Video Tracking	Supported
Image Flip, Mirror and Freeze	Supported
Power Options	
Power Supply	DC 12V / PoE+ (802.3at)
Input Power	18W (Max)

Physical Specifications	
Material	Aluminum, Plastic
Color	PT30X-4K-WH-G3 (White) PT30X-4K-GY-G3 (Gray)
Dimensions (W x D x H)	6.69" W x 7.12" D x 8.98" H., 170mm W X181mm D x 228mm H
Weight	4.41 lbs 2.0 kg
Working Environment	Indoor
Operating Temperature	14°F ~ 104°F (-10°C to 40°C)
Storage Temperature	-40°F ~ 140°F (-40°C to 60°C)
Rear Board Connectorstors	
Video Output	1x RJ45: 10/100/1000M Adaptive Ethernet Port 1x HDMI: version 2.0 1x USB 2.0: type A 1x 3G-SDI: BNC type, 800m VP-p, 75Ω, Along to SMPTE 424M standard
Audio Interface	1x 3.5mm Line level Input
Communication Interface	1x 8 pin Mini-din RS232 input, Max distance: 98.5ft / 30m, protocol: VISCA / Pelco-D / Pelco-P 1x 8 pin Mini-din RS232 output, Max distance 98.5ft / 30m, protocol: VISCA / Pelco-D / Pelco-P 1x 2 pin Phoenix port, RS485 input / output, Max distance 3,937ft / 1200m, protocol: VISCA / Pelco-D / Pelco-P
Network Interface	RJ45: 10/100/1000M Adaptive Ethernet Port, supports PoE
Power Jack	JEITA type (DC IN 12V)













Product Line

	PT12X-SE-GY-G3 PT20X-SE-GY-G3 PT30X-SE-GY-G3		PT12X-SE-WH-G3 PT20X-SE-WH-G3 PT30X-SE-WH-G3	1080p Image, 12X, 20X, or 30X optical zoom, HDMI, 3G-SDI, USB2-A, IP Streaming
	PT12X-4K-GY-G3 PT20X-4K-GY-G3 PT30X-4K-GY-G3		PT12X-4K-WH-G3 PT20X-4K-WH-G3 PT30X-4K-WH-G3	4K PTZ Camera, 12X, 20X, or 30X optical zoom, NDI® HX 3, HDMI, 3G-SDI, USB2-A, IP Streaming
	PT12X-LINK-4K-GY PT20X-LINK-4K-GY PT30X-LINK-4K-GY		PT12X-LINK-4K-WH PT20X-LINK-4K-WH PT30X-LINK-4K-WH	4K PTZ Camera, Dante™ AV-H ready, 12X, 20X, or 30X optical zoom, 3G-SDI, USB2-A, IP Streaming
	PT-STUDIOPRO			1080p Image, NDI® HX 3, 12X optical zoom & 16X digital zoom, Includes LED Panel Light

Accessories

	PT-WC-PP-G1	A wireless data transmission system that functions just like an Ethernet cable up to 400m
	HC-JOY-G3	Serial VISCA (RS232, RS485, Pelco-D, Pelco-P)
	PT-JOY-G4	VISCA over IP (PTZOptics & Sony) or Serial VISCA (RS232, RS485, Pelco-D, Pelco-P)
	PT-SUPERJOY-G1	VISCA over IP (PTZOptics & Sony), NDI®, Serial VISCA (RS232, RS485, Pelco-D, Pelco-P)
	IR Remote	Wirelessly control your camera with this included IR remote.
	Camera Management Platform	Control your PTZOptics cameras through one convenient, free desktop application
	PTZ Control Pro 2	The free PTZControl Pro 2 app offers easy control of PTZOptics cameras from any iOS device.

Mounts

	HCM-1-BK		HCM-1-WH	Small Universal Wall Mount, mounts directly to wall or box with supplied hardware
	HCM-2-BK		HCM-2-WH	Large Universal Wall Mount, mounts directly to wall or box with supplied hardware
	HCM-1C-WH			Small Open Base Ceiling Mount, mounts to 1" NPT Pipe
	HCM-2C-WH			Large Open Base Ceiling Mount, mounts to 1" NPT pipe
	PT-WM-3-BK		PT-WM-3-WH	Large Wall Mount for Move 4K 30X, mounts directly to wall or box with supplied accessories
	PT-CM-1-BK		PT-CM-1-WH	Small Surface Ceiling Mount, mounts directly to ceiling or box w / supplied accessories
	PT-CM-3-BK		PT-CM-3-WH	Large Surface Ceiling Mount for Move 4K 30X, mounts directly to ceiling or box with supplied accessories