



**SALAMANDER**  
DESIGNS

Furniture Shaped By Your Needs ®

**COLLABORATION FURNITURE**

**BUNDLE SOLUTIONS**



## 3 BAY, SINGLE MONITOR CREDENZA

**D2/337BM1/**

This robust, large-capacity cabinet system houses all electronics, including integrated support for AV and IT systems. Freestanding and fully-integrated, this credenza is perfect for retrofit installations, allowing for quick and efficient installation without involving additional tradespeople to install electrical wiring or reinforce walls.

Available in a variety of styles.



**DYO**  
DESIGN YOUR OWN

See our **full-line catalog** for more customizable credenzas or visit [SalamanderDesigns.com/Commercial](http://SalamanderDesigns.com/Commercial)






# 3 BAY, DUAL MONITOR CREDENZA

COLLABORATION FURNITURE

D2/337BM1/

BUNDLE SOLUTIONS


*\*Barcelona Models*  
86.5"W x 34.5"H x 22"D  
2197mm x 876mm x 559mm

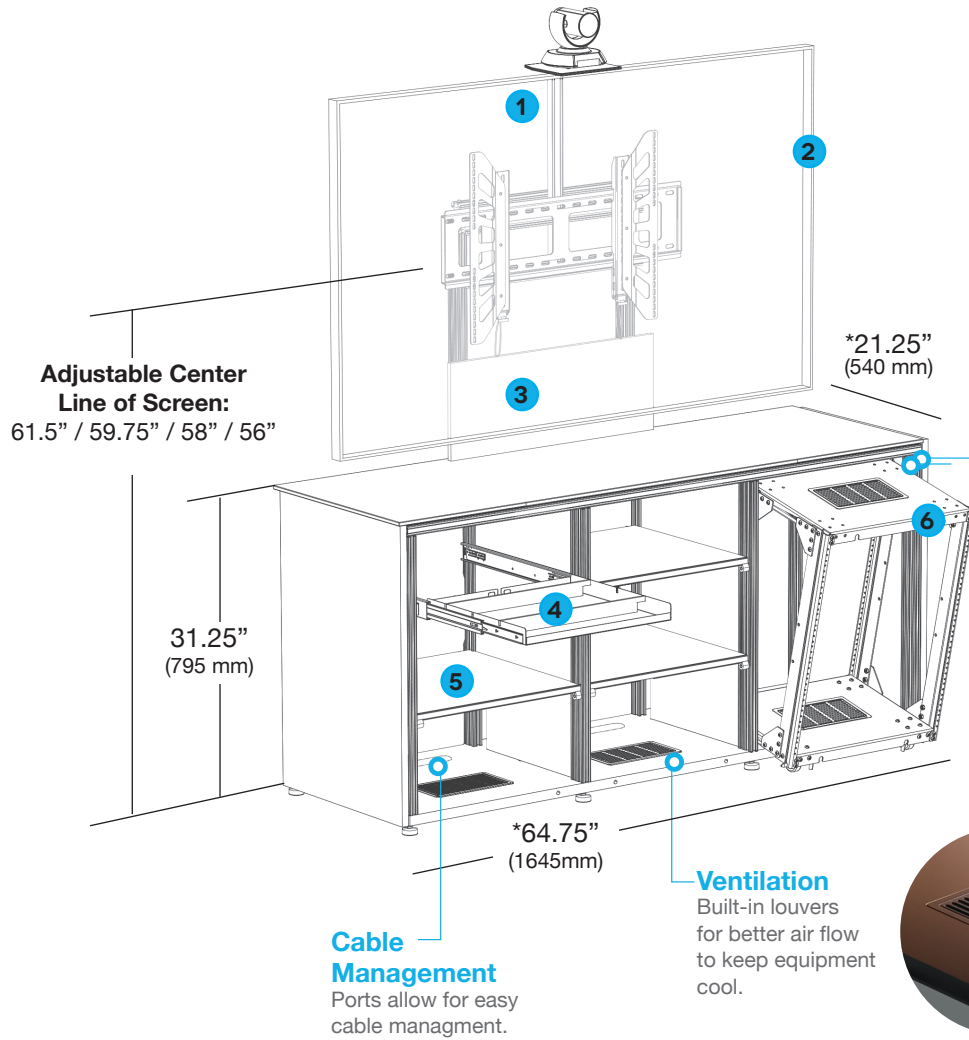

**Aluminum Frame**  
Durable and flexible support chassis.



**Leveler Feet**




**Ventilation**  
Built-in louvers for better air flow to keep equipment cool.

## \*CREDENZA INCLUDES:

1. (1) Camera Shelf
2. (1) Single Monitor Mount
3. (1) Black, Modesty Panel
4. (1) Pull-Out Storage Tray
5. (3) Adjustable Shelves
6. (1) 13-U Pull-Out Rack Cartridge
7. (1) Active Cooling Rear Panel
8. (2) Pinch-Out Rear Panels

## Typical interior bay dimensions:

19.75"W (502 mm) x 27.75"H (705 mm)  
x 19.5"D (495 mm)

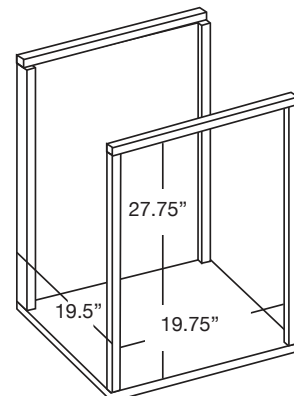




## VIDEO INTEGRATION

### Single Monitor Mount

- Holds 50-103", 175 lbs (80kg)
- Integrated mount with 11.75"H (298mm) black modesty panel
- Vesa Compliant: Horizontal 200 - 800 mm, Vertical 200 - 500 mm
- Adjustable mounting surface spaced at 5" min (127mm) distance from the wall. The width is adjustable to accommodate the screens listed. Overall height is 70" (1778mm) with wings and 65" (1651mm) to the top of the mount as shipped. all dimensions are subject to change based on style and feet.
- Adjustable Center Line of Screen:  
61.5" (1562mm) / 59.75" (1518mm) / 58"(1473mm) / 56" (1422mm)

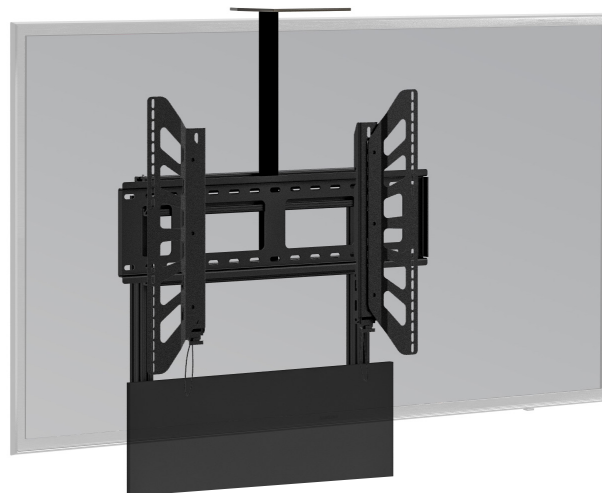

### Camera Shelf


- Shelf integrates camera above, below or between displays on this model.
- Fully adjustable height.
- Single Shelf: 10"W (254mm) x 6"D (152mm) x .25"Th (6mm)
- Dual Shelf: 10"W (254mm) x 6"D (152mm) x .5"Th (13mm)
- Maximum Weight Capacity of 5 lbs (2 kgs)

Dual Camera Shelf Available  
CA/CM/D

## INTERIOR STORAGE

### Pull-Out Storage Tray

- Storage tray with adjustable dividers (2), felt liner and integrated wire manager
- Utilizes heavy duty ball bearing slides, black steel body.
- Maximum Weight Capacity: 50 lbs (22.6 kgs)
- Measures: 17.25"W (438mm) x 16"D (406mm) x 1.625"H (42mm)

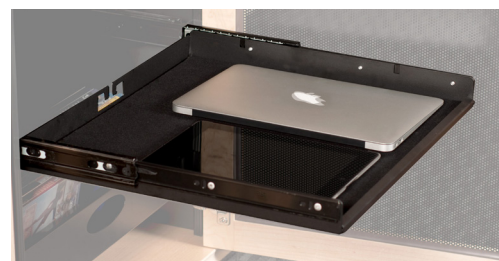

### Adjustable Shelves (7 included)


- Fully adjustable
- Matte black, powder-coated MDF
- Maximum Weight Capacity: 75 lbs (34 kgs)
- Measures: 19.75"W (502mm) x 17.5"D (445mm) x .625" TH (16mm)





## 13-U PULL-OUT RACK CARTRIDGE

- 13 rack unit storage
- Pull-out 19" standard rack with rails front and back of the rack
- Cabinet guide rails and in-line caster base provide simple use and transport
- Weight capacity of 200 lbs (90.7 kgs)
- Heavy duty bearing wheels for easy installation, removal, and maneuvering of full equipment racks during service
- Rugged 12-gauge powder coated steel construction
- Flexible wire management wire loom allows for removal of rack from cabinet with 360 degrees of access to components without disconnecting from cabinet. An absolute step up from slide out and rotational racks service constraints
- Tool-less removal / installation for service
- Does not require cabinet to be attached to the wall or floor as other solutions.

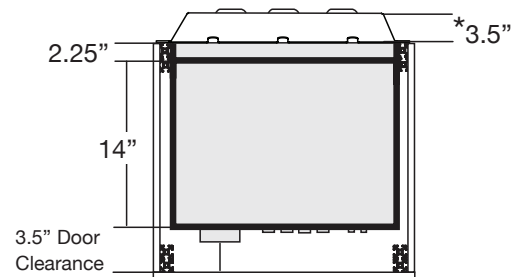

\* When using optional Extended Rear Panel (sold separately).

### Options Include:

- **Fan Kit** (# FI/CR/AC) active cooling insert that provides front exhausting of heat to protect components.
- **Wire Lacing Bars** (RM/LB2)
- **14"D Vented Rack Shelves** (RM/VS2U, RM/VS3U, RM/VS4U)
- **Face Plates** (RM/VFP/1U, RM/VFP/2U, RM/VFP/3U, RM/VFP/4U, )



## COOLING & ACCESS

### Active Cooling Rear Panel

- Thermostatically controlled cooling system turns On at approx 80° F, maximum speed is reached at 95° F
- Automatic, low-noise cooling system with 22 dBA, quad 80 mm exhaust fans
- Air Flow: 26 CFM
- Exhaust Direction: Rearward
- Power Consumption: 1W in standy mode; 4 W in mid speed 8-10 W in full speed
- Thermistor: Remote with 20" lead
- Input: 100-240V / 50Hz-60Hz. International power plug available (#400-230 and 400-235)



### Pinch-Out Rear Panels (2 included)

- Permit fast, easy access to components and wiring







## STYLES

We select the finest materials and finishes. Choose from sleek, hand-polished, high-gloss finishes to richly textured real wood fronts or a contemporary beveled edge style with a mix of materials.

*\*All styles come standard with leveler feet.*

**If you are looking for something different or special please contact us to discuss custom options.**

### TEXTURED



**BERLIN**  
Wenge, Wave-Texture  
Doors with 1/2" (12mm) Black,  
Solid Surface  
D2/337BM1/BL/WE



**CHICAGO**  
Black Oak, Grass-Textured  
Doors with 1/2" (12mm) Black,  
Solid Surface  
D2/337BM1/CH/BO

### BLACK & WHITE



**OSLO**  
Black Oak Sides, Black Glass  
Doors with 1/2" (12mm) Black,  
Solid Surface  
D2/337BM1/OS/BG

### BARCELONA



**BARCELONA - WHITE**  
Natural Walnut, Warm White  
Doors, Beveled-Edge Top  
D2/337BM1/BA/NW/GW



**DENVER - OAK**  
Natural Oak, Bark-Textured  
Doors with 1/2" (12mm) Black,  
Solid Surface  
D2/337BM1/DV/NO



**DENVER - WALNUT**  
Medium Walnut, Bark-Textured  
Doors with 1/2" (12mm) Black,  
Solid Surface  
D2/337BM1/DV/MW



**MIAMI - BLACK**  
Gloss Warm White  
Doors with 1/2" (12mm) Black,  
Solid Surface  
D2/337BM1/MM/GW/BK



**BARCELONA - GLASS**  
Natural Walnut, Black Glass  
Doors, Beveled-Edge Top  
D2/337BM1/BA/NW/BG



**ZURICH**  
Linear Texture - Opium Brown  
Doors with 1/2" (12mm) Black,  
Solid Surface  
D2/337BM1/ZU/OB



**MIAMI - WHITE**  
Gloss Warm White  
Doors with 1/2" (12mm) White  
Solid Surface  
D2/337BM1/MM/GW/WH