




SADDLE AIR CONDITIONER

Electronic Controls

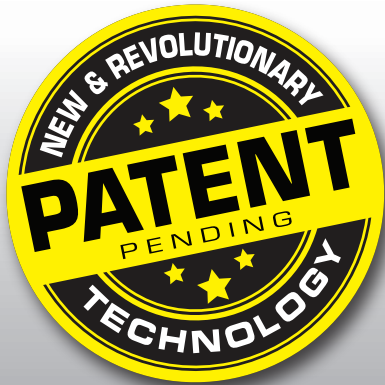

	Room Size	Area Sq.Ft.	Recommended BTU
SMALL	15'X18-1/3'	275	6,000
MEDIUM	20'X18-3/4'	375	8,000

SPECIFICATIONS for WS3-06E-201

Voltage: 115V (60Hz)
 Amps: 4.5
 Watts: 495
 Noise Level: (Indoor): 38dB(A)-49dB(A) (Outdoor): 51dB(A)- 63dB(A)
 Dehumidifying Capacity: 30 (Pints/Day)
 Airflow CFM: 170/230/270
 Cord Length: 72"
 Product Dimensions: 18.7"W x 15"H x 28.9"D
 Product Weight: 67.7 lbs.

SPECIFICATIONS for WS3-08E-201

Voltage: 115V (60Hz)
 Amps: 6.5
 Watts: 667
 Noise Level: (Indoor): 38dB(A)-49dB(A) (Outdoor): 51dB(A)- 63dB(A)
 Dehumidifying Capacity: 34 (Pints/Day)
 Airflow CFM: 165/223/264
 Cord Length: 72"
 Product Dimensions: 18.7"W x 15"H x 28.9"D
 Product Weight: 71.2 lbs.

Fits window openings 24" to 48" wide by 16" high
 Window kit included. Window opening dimensions include space needed for included side curtains. For use in window installations only - not for use in thru-the-wall sleeves.



MyTemp SENSOR
 keeps the unit operating until the desired temperature is reached at the remote control



DEHUMIDIFIER MODE
 removes moisture from the air



DIGITAL THERMOSTAT
 provides precise temperature control



SLEEP MODE
 gradually increases temperature and saves energy while you sleep



ENERGY SAVER MODE
 maintain optimum room temperature while saving the most energy



AUTO MODE
 keeps the room comfortable without overcooling



SAFE AND EASY INSTALLATION

minimizes the risk of falls and dangerous accidents



FULL WINDOW VIEW & USE

keep the view and maintain full window function after installation



30% QUIETER THAN AVERAGE WINDOW ACs



ULTRA QUIET OPERATION

cools the room and keeps the compressor noise outside



For more info go to www.soleusairwest.com