

C2-2855 / C2-2755 / C2-2655

Scaling with Speed and Agility



A new generation of Scalers

tvONE's evolutionary development of our renowned CORIO®2 scaler technology continues to provide commercial integrators with unsurpassed image quality in nearly any installation situation. Now, to further improve upon the core technology, we are introducing a new generation of scalers that are extremely intuitive & user-friendly and provide greater flexibility.

These new designs have more input/output flexibility than any other previous tvONE scaler. They can be set up and managed using a new, innovative front panel or via computer-based control panel that allows setup in less than 1/3 the time of the previous generation. The interface provides two distinct sections for unrivaled ease of use; one for system setup and another for live, real-time operations. The front panel helps with setup time through color modulated soft-buttons, intuitive categorized menus, and simple recall of up to 12 presets. Control software is available on several Windows platforms & interfaces directly with the unit. IP and RS-232 serial interfaces are also provided for use with 3rd party control systems.

These scalers provide high quality bi-directional conversion between a variety of analog and digital video formats. Inputs and Outputs include SD/HD/3G-SDI, HDMI, DVI, Composite Video, YC, YUV, YPbPr or RGB. Signal parameters of the incoming video may be adjusted. All settings are stored in non-volatile memory and are retained even when power is switched off. Twelve user-defined presets are available to customize settings for various applications. The high resolution RGB/YPbPr output is selectable at virtually any PC or HDTV resolution. NTSC, PAL, PAL-M, and PAL-N standards are supported. SECAM is supported for input.

tvONE's Calibrate feature automatically sizes and positions computer images to fit exactly on the video display, and the 10X Variable Zoom can enlarge and position any part of an input to fill the entire video output display. Variable Shrink with as much as 90% size reduction allows almost any image to fit on the tiniest screen. Both high sampling rate and the advanced Digital Flicker Elimination circuitry on CV & YC outputs ensure crisp, clear images, while full bandwidth chroma sampling ensures faithfully reproduced, high resolution colors. Motion compensation, diagonal interpolation and a 3:2 Pulldown feature for NTSC greatly improve the image quality. Temporal interpolation greatly improves frame-rate conversion by merging successive frames. Pixel Level Motion Adaptive Diagonal Interpolation ensures high quality de-interlacing of PAL & NTSC signals.

Advanced Features - Keying allows one input to be keyed over a second input. The keyed image may be faded in and out. Due to the 4:4:4 sampling format for RGB sources, precise keying at the pixel level can be achieved. Transitions permit Seamless Cut, Fade or Wipe transitions between input sources. The Picture-In-Picture (PIP) functionality allows an input to be inset in a window over a second input or vice versa. The PIP window may be placed anywhere on the screen. The Genlock feature ensures precise synchronization of the incoming signals by providing a wide subcarrier lock range with subcarrier phase adjust.

Basic Integral Stereo Audio switching is provided by an integral 4x1 audio routing switcher. The four impedance-independent unbalanced inputs follow the video input selection. A rear panel terminal block and a 3.5mm jack-socket provides access. Embedded Audio Support allows any audio input to be embedded on all outputs which support embedded audio data (HDMI/DVI-U/SDI).

Auto Switching

The Auto Switching function turns the C2-2x55 into a powerful standalone device. Allowing the user to connect their source and have it automatically displayed on screen without having to press any buttons. The incoming resolution is quickly detected and analysed meaning within a few seconds the user is up and running and ready to present. This is particularly useful in situations where there is little or no technical supervision such as in meeting rooms, medical environments, teaching spaces or live staging events.

CORIOcontrol

CORIOcontrol software encompasses the C2-2855 Universal Scaler, the C2-2755 Video Scaler and the C2-2655 Scan Converter. Adding even more flexibility, CORIOcontrol is a PC based application that gives you full remote access, offering remote management of system settings and control configurations before and during live presentations. The software consists of a number of mini applications that allow you to access separate elements of the C2-2x55's functionality. These combine to give you a full suite of control interfaces all in one convenient application. The mini apps allow you to: upload and manage internally stored Still images and Logos; store and recall Presets; edit resolutions; manage system configurations; update firmware; and backup and restore system settings. Connection can be via RS232 or Ethernet adding extra flexibility for local and remote access. The communications interface efficiently analyses both the network and the host PC and displays all available com ports and IP connected units regardless of their address, making it easy to manage network connectivity and hardware devices.



Pixel mode

NEW - Pixel mode allows for exact placement of window locations and sizes.



Picture-in-Picture capability - any size, any position

Up/Down/Cross Conversion

Up conversion enables scaling to higher resolutions ie PAL 625i analog to 720p digital



625i




525i

Down (Scan) conversion is the process of decreasing a video's resolution ie XGA 60Hz to NTSC 525i



720p



XGA

WXGA



1080p

Cross conversion enables scaling between different resolutions ie 720p to 1080p




Please note these are only examples of Up, Down & Cross Conversion. In usage only a single output resolution is possible at one time.

Video Layering with Keying



Audio Routing

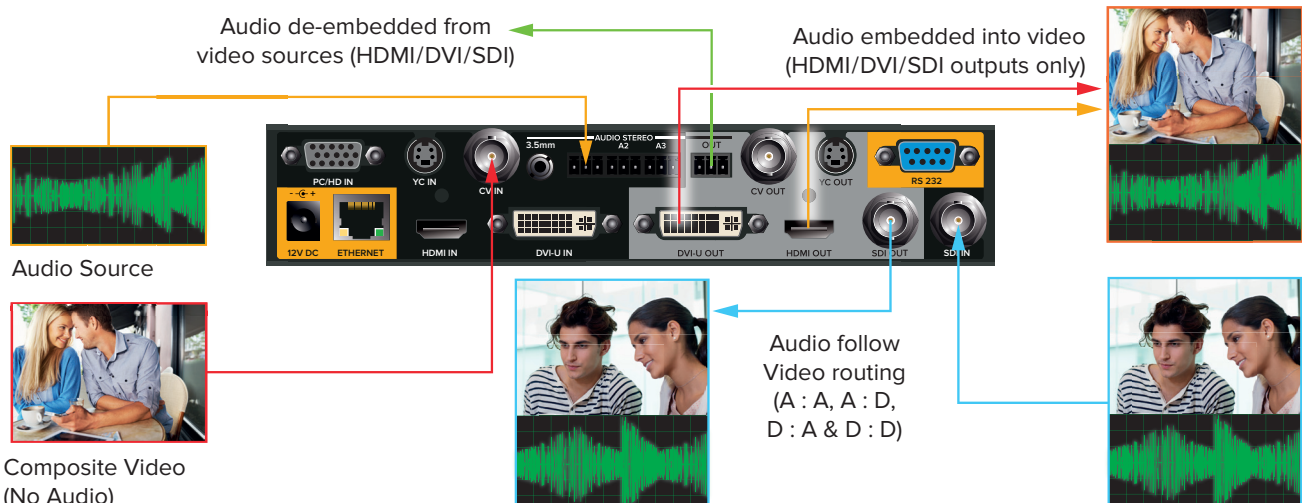

Video I/O Interfaces

Connector	C2-2855	C2-2755	C2-2655
HDMI In	•	•	•
Universal DVI In	•	•	•
YC In	•	•	•
CV In	•	•	•
SDI In	•	•	•
PC/HD In	•	•	•
HDMI Out	•	•	•
Universal DVI Out	•	DVI-I only	•
YC Out	•	•	•
CV Out	•	•	•
SDI Out	•	•	•

Video Resolutions

ALL models support ALL the resolutions below for input.

For output, different models support different resolutions as indicated by the model columns.

Resolution	C2-2855	C2-2755	C2-2655	Resolution	C2-2855	C2-2755	C2-2655	Resolution	C2-2855	C2-2755	C2-2655
NTSC 525i	•	•	•	1280x720 23.98Hz	•	•	•	1360x768 60Hz	•	•	•
PAL 625i	•	•	•	1280x720 24Hz	•	•	•	1365x1024 75Hz	•	•	•
640x480 60Hz	•	•	•	1280x720 25Hz	•	•	•	1400x900 60Hz	•	•	•
640x480 67Hz	•	•	•	1280x720 29.97Hz	•	•	•	1400x1050 60Hz Rb [#]	•	•	•
640x480 72Hz	•	•	•	1280x720 30Hz	•	•	•	1400x1050 60Hz	•	•	•
640x480 75Hz	•	•	•	1280x720 50Hz	•	•	•	1400x1050 75Hz	•	•	•
640x480 85Hz	•	•	•	1280x720 59.94Hz	•	•	•	1600x1200 60Hz	•	•	•
640x480 117Hz	•	•	•	1280x720 60Hz	•	•	•	1680x1050 60Hz	•	•	•
640x480 138Hz	•	•	•	1280x768 60Hz Rb [#]	•	•	•	1920x1080i 47.96Hz	•	•	•
720x480 59.94Hz	•	•	•	1280x768 60Hz	•	•	•	1920x1080i 48Hz	•	•	•
720x576 50Hz	•	•	•	1280x768 75Hz	•	•	•	1920x1080i 50Hz	•	•	•
800x600 56Hz	•	•	•	1280x768 85Hz	•	•	•	1920x1080i 59.94Hz	•	•	•
800x600 60Hz	•	•	•	1280x800 60Hz Rb [#]	•	•	•	1920x1080i 60Hz	•	•	•
800x600 72Hz	•	•	•	1280x800 60Hz	•	•	•	1920x1080 23.98Hz	•	•	•
800x600 75Hz	•	•	•	1280x800 75Hz	•	•	•	1920x1080 24Hz	•	•	•
800x600 85Hz	•	•	•	1280x800 85Hz	•	•	•	1920x1080 25Hz	•	•	•
800x600 95Hz	•	•	•	1280x960 60Hz	•	•	•	1920x1080 29.97Hz	•	•	•
800x600 112Hz	•	•	•	1280x960 72Hz	•	•	•	1920x1080 30Hz	•	•	•
1024x768 60Hz	•	•	•	1280x960 85Hz	•	•	•	1920x1080 50Hz	•	•	•
1024x768 70Hz	•	•	•	1280x1024 60Hz	•	•	•	1920x1080 59.94Hz	•	•	•
1024x768 75Hz	•	•	•	1280x1024 70Hz	•	•	•	1920x1080 60Hz	•	•	•
1024x768 85Hz	•	•	•	1280x1024 75Hz	•	•	•	1920x1200 50Hz Rb [#]	•	•	•
1024x768 89Hz	•	•	•	1280x1024 85Hz	•	•	•	1920x1200 60Hz Rb [#]	•	•	•

[#] Rb = reduced blanking

NEW - Resolution Editor as part of the CORIOcontrol software can be used to create new custom resolutions that can be used as input or output resolutions.



C2-2855 Specifications

Video Input	
Television Standards	NTSC, PAL
Composite Video	1x via BNC & 1x via DVI-U*
YC (S-Video)	1x via 4-Pin Mini-DIN & 1x via DVI-U*
HDTV	1x via HDMI (DVI 1.0, HDCP 1.4) & 1x via DVI-U*
SD/HD/3G-SDI	1x via BNC
Computer Inputs	
Signal Type	1x Analog via PC/HD HD15, 1x DVI-U*
Format	RGBHV, RGBS, RGsB, YPbPr, YUV
Sync	TTL Level, 10K, Pos or Neg
Termination	75 Ω
R-G-B Level Range	0.5-2.0 Vp-p
Scan Rate Detection	Automatic
Analog Signals	PC to 1920x1080, HD to 1080p/60
DVI & HDMI signals	PC to 1920x1200, HD to 1080p/60
Max Horiz Scan Rate	150kHz
Computer Compatibility	PC, Mac, Workstations
Video Outputs	
Television Standards	NTSC, PAL
Impedance	75 Ω
Composite Video	1x via BNC
YC (S-Video)	1x via 4-PIN Mini-DIN
YUV, YPbPr	1x via DVI-U*
HDTV	1x via HDMI CEC pass-through for HDMI In to Out
SD/HD/3G-SDI	1x via BNC
Maximum Latency	1-2 Frames
Computer Outputs	
Signal Type	1x DVI-U* & 1x HDMI
Format	RGBHV, RGBS, RGsB, YPbPr
R-G-B Level	0.7 Vp-p
Analog Signals	PC to 1920x1080, HD to 1080p/60
DVI & HDMI Signals	PC to 1920x1200, HD to 1080p/60
Image Processing features	
Size and Position	Automatic via AutoSet or Manual
Image Size	User-Definable Presets
Image Freeze	One Video Frame
Settings Memory	Non-Volatile
Zoom Range	Variable to 10X Zoom
Shrink Range	Variable to 10%
Image Mirroring	Horizontal and/or Vertical
Horizontal Filtering	Full Digital
Conversion Technology	Proprietary - CORIO®2
Framerate Conversion	Temporal
Color Resolution	24-bit (16.8 Million Colors)
Sampling Rate	162MHz
Digital Sampling	24-bit, 4:4:4 or 4:2:2 format subject to input source
Firmware Memory	Flash upgradeable via RS-232 or IP
Video Encoder & Decoder	8-bit Digital
De-Interlacing (NTSC-PAL)	Pixel-level Motion Adaptive, Diagonal Interpolation
Film Mode (NTSC)	3:2 Pulldown
Maximum Latency	1-2 frames
Video Adjustments	CV/YC: Contrast, Brightness, Saturation, Hue (NTSC)
Audio Input/Output	
Inputs	3x Unbalanced via Terminals, 1x Unbalanced via 3.5mm jack,
	1x HDMI, 1x DVI-U*, 1x SDI
Outputs	Unbalanced via Terminals, 1x HDMI, 1x DVI-U*, 1x SDI

Audio Input/Output continued	
I/O Impedance	Impedance-Independent
De-embedding support	1 stereo pair at 32 kHz, 44.1 kHz, 48kHz from HDMI, 48kHz SDI
Embedded support	1 stereo pair at 48kHz
Operational Modes	
Key	Chromakey or Lumakey
Mix	PC to/from Video and SIS
PIP	Variable Window Size & Position
SDI Jitter	
SMPTE259M-C (SD-SDI)	(270Mbps: 525/625Line) Jitter < 0.1 UI
SMPTE292M (HD-SDI)	(1.485/1.4835Gbps: 720p, 1035i, 1080i, 1080p) Jitter < 0.2 UI
SMPTE424M (3G-SDI)	(2.97/2.967Gbps: 1080p50/60) Jitter < 0.3 UI
SDI Input Cable Equalization (under optimal conditions)	
SMPTE259M-C (SD-SDI)	300m
SMPTE292M (HD-SDI)	166m
SMPTE424M (3G-SDI)	100m
I/O Vertical Rates - SMPTE259M-C (SD-SDI)	
525i (720x487)	59.94Hz
625i (720x576)	50Hz
I/O Vertical Rates - SMPTE292M (HD-SDI)	
720p (1280x720)	23.98, 24, 25, 29.97, 30, 50, 59.94, 60Hz
1080i (1920x1080)	50, 59.94, 60Hz
1080p (1920x1080)	23.98, 24, 25, 29.97, 30Hz
I/O Vertical Rates - SMPTE424M (3G-SDI)	
1080p (1920x1080)	50, 59.94, 60Hz
Control Methods	
Local	via Front Panel Buttons & OLED
RS-232 Interface	via D9 Female Connector
IP Interface	RJ45 Connector
Control Software included	
Warranty	
Limited Warranty	5 Years Parts and Labor
Regulatory Compliance	
Main Units	FCC Class B, CE, RoHS, UL, cUL
Power Supplies	UL, cUL, CE, PSE, GS, RoHS
Mechanical	
Size (H-W-D)	42 x 218 x 189mm (1.63" x 8.6" x 7.4")
Weight (Net)	1.26 Kg (2.78 lbs) excluding PSU
Environmental	
Operating Temperature	0° to +40°C (+32° to +104°F) Ambient
Operating Humidity	10% to 85%, Non-condensing
Storage Temperature	-10° to +70°C (+14° to +158°F)
Storage Humidity	10% to 85%, Non-condensing
Power Requirement	
External Power Supply	12V DC @ 1.5A
Accessories Included	
	1x Operations Manual on USB stick
	1x PC Control Software (Microsoft Vista and above)
	1x Quick Start Guide
	1x Universal Power Supply ('brick' type)
	1x Regional Power Cable
Product Item Number	
	C2-2855
Optional Accessories	
RM-220	Single/Dual Rackmount Kit

Specifications subject to change
The C2-2855 replaces the C2-2355A



C2-2755 Specifications

Video Input	
Television Standards	NTSC, PAL, PAL-M, PAL-N, SECAM
Composite Video	1x via BNC & 1x via Universal DVI*
YC (S-Video)	1x via 4-Pin Mini-DIN & 1x via Universal DVI*
HDTV	1x via HDMI (DVI 1.0, HDCP 1.4) & 1x via Universal DVI*
SD/HD/3G-SDI	1x via BNC
Computer Inputs	
Signal Type	1x Analog via PC/HD HD15, 1x Universal DVI*
Format	RGBHV, RGBS, RGsB, YPbPr, YUV
Sync	TTL Level, 10K, Pos or Neg
Termination	75 Ω
R-G-B Level Range	0.5-2.0 Vp-p
Scan Rate Detection	Automatic
Analog Signals	PC to 1920x1080, HD to 1080p/60
DVI & HDMI signals	PC to 1920x1200, HD to 1080p/60
Max Horiz Scan Rate	150kHz
Computer Compatibility	PC, Mac, Workstations
Video Outputs	
Television Standards	720p, 1080i, 1080p
YUV, YPbPr	1x via DVI-I**
HDTV	1x via HDMI CEC pass-through for HDMI In to Out
Maximum Latency	1-2 Frames
Computer Outputs	
Signal Type	1x DVI-I & 1 x HDMI
Format	RGBHV, RGBS, RGsB, YPbPr
R-G-B Level	0.7 Vp-p
Analog Signals	PC; 800x600/60 to 1920x1080, HD; 720p/24 to 1080p/60
DVI & HDMI Signals	PC; 800x600/60 to 1920x1200, HD; 720p/24 to 1080p/60
Image Processing features	
Size and Position	Automatic via Calibrate or Manual
Image Size	User-Definable Presets
Image Freeze	One Video Frame
Settings Memory	Non-Volatile
Zoom Range	Variable to 10X Zoom
Shrink Range	Variable to 10%
Image Mirroring	Horizontal and/or Vertical
Horizontal Filtering	Full Digital
Conversion Technology	Proprietary - CORIO®2
Framerate Conversion	Temporal
Color Resolution	24-bit (16.8 Million Colors)
Sampling Rate	162MHz
Digital Sampling	24-bit, 4:4:4 or 4:2:2 format subject to input source
Firmware Memory	Flash upgradeable via RS-232 or IP
Video Encoder & Decoder	8-bit Digital
De-Interlacing (NTSC-PAL)	Pixel-level Motion Adaptive, Diagonal Interpolation
Film Mode (NTSC)	3:2 Pulldown
Maximum Latency	1-2 frames
Video Adjustments	CV/YC: Contrast, Brightness, Saturation, Hue (NTSC), Analog RGB/YPbPr levels
Audio Input/Output	
Inputs	3x Unbalanced via Terminals, 1x Unbalanced via 3.5mm jack, 1x HDMI, 1x Universal DVI*, 1x SDI
Outputs	Unbalanced via Terminals, 1x HDMI, 1x DVI-I

Audio Input/Output continued	
I/O Impedance	Impedance-Independent
De-embedding support	1 stereo pair at 32 kHz, 44.1 kHz, 48kHz from HDMI, 48kHz SDI
Embedded support	1 stereo pair at 48kHz
Operational Modes	
Key	Chromakey or Lumakey
Mix	PC to/from Video and SIS
PIP	Variable Window Size & Position
SDI Input Cable Equalization (under optimal conditions)	
SMPTE259M-C (SD-SDI)	300m
SMPTE292M (HD-SDI)	166m
SMPTE424M (3G-SDI)	100m
Input Vertical Rates - SMPTE259M-C (SD-SDI)	
525i (720x487)	59.94Hz
625i (720x576)	50Hz
Input Vertical Rates - SMPTE292M (HD-SDI)	
720p (1280x720)	29.97, 30, 50, 59.94, 60Hz
1080i (1920x1080)	50, 59.94, 60Hz
1080p (1920x1080)	23.98, 24, 25, 29.97, 30Hz
Input Vertical Rates - SMPTE424M (3G-SDI)	
1080p (1920x1080)	50, 59.94, 60Hz
Control Methods	
Local	via Front Panel Buttons & OLED
RS-232 Interface	via D9 Female Connector
IP Interface	RJ45 Connector
Control Software included	
Warranty	
Limited Warranty	5 Years Parts and Labor
Regulatory Compliance	
Main Units	FCC Class B, CE, RoHS
Power Supplies	UL, cUL, CE, PSE, GS, RoHS
Mechanical	
Size (H-W-D)	42 x 218 x 189mm (1.63" x 8.6" x 7.4")
Weight (Net)	1.26 Kg (2.78 lbs) excluding PSU
Environmental	
Operating Temperature	0° to +40°C (+32° to +104°F) Ambient
Operating Humidity	10% to 85%, Non-condensing
Storage Temperature	-10° to +70°C (+14° to +158°F)
Storage Humidity	10% to 85%, Non-condensing
Power Requirement	
External Power Supply	12V DC @ 1.5A
Accessories Included	
	1x Operations Manual on USB stick
	1x PC Control Software (Microsoft Vista and above)
	1x Quick Start Guide
	1x Universal Power Supply ('brick' type)
	1x Regional Power Cable
Product Item Number	
	C2-2755
Optional Accessories	
RM-220	Single/Dual Rackmount Kit

Specifications subject to change
The C2-2755 replaces the C2-2255A



C2-2655 Specifications

Video Input	
Television Standards	NTSC, PAL, PAL-M, PAL-N, SECAM
Composite Video	1x via BNC & 1x via Universal DVI*
YC (S-Video)	1x via 4-Pin Mini-DIN & 1x via Universal DVI*
HDTV	1x via HDMI (DVI 1.0, HDCP 1.4) & 1x via Universal DVI*
Computer Inputs	
Signal Type	1x Analog via PC/HD HD15, 1x Universal DVI*
Format	RGBHV, RGBS, RGsB, YPbPr, YUV
Sync	TTL Level, 10K, Pos or Neg
Termination	75 Ω
R-G-B Level Range	0.5-2.0 Vp-p
Scan Rate Detection	Automatic
Analog Signals	PC to 1920x1080, HD to 1080p/60
DVI & HDMI signals	PC to 1920x1200, HD to 1080p/60
Max Horiz Scan Rate	150kHz
Computer Compatibility	PC, Mac, Workstations
Video Outputs	
Television Standards	NTSC, PAL, PAL-M, PAL-N
Impedance	75 Ω
Composite Video	1x via BNC
YC (S-Video)	1x via 4-PIN Mini-DIN
YUV, YPbPr	1x via Universal DVI*
HDTV	1x via HDMI CEC pass-through for HDMI In to Out
SD/HD/3G-SDI	1x via BNC
Maximum Latency	1-2 Frames
Computer Outputs	
Signal Type	1x Universal DVI* & 1 x HDMI
Format	RGBHV, RGBS, RGsB, YPbPr
R-G-B Level	0.7 Vp-p
Analog Signals	PC to 1024x768, HD to 1080p/60
DVI & HDMI Signals	PC to 1024x768, HD to 1080p/60
Image Processing features	
Size and Position	Automatic via Calibrate or Manual
Image Size	User-Definable Presets
Image Freeze	One Video Frame
Settings Memory	Non-Volatile
Zoom Range	Variable to 10X Zoom
Shrink Range	Variable to 10%
Image Mirroring	Horizontal and/or Vertical
Horizontal Filtering	Full Digital
Conversion Technology	Proprietary - CORIO®2
Framerate Conversion	Temporal
Color Resolution	24-bit (16.8 Million Colors)
Sampling Rate	162MHz
Digital Sampling	24-bit, 4:4:4 or 4:2:2 format subject to input source
Firmware Memory	Flash upgradeable via RS-232 or IP
Video Encoder & Decoder	8-bit Digital
De-Interlacing (NTSC-PAL)	Pixel-level Motion Adaptive, Diagonal Interpolation
Film Mode (NTSC)	3:2 Pulldown
Maximum Latency	1-2 frames
Video Adjustments	CV/YC: Contrast, Brightness, Saturation, Hue (NTSC), Analog RGB/YPbPr levels
Audio Input/Output	
Inputs	3x Unbalanced via Terminals, 1x Unbalanced via 3.5mm jack, 1x HDMI, 1x Universal DVI*, 1x SDI

Audio Input/Output Continued	
Outputs	Unbalanced via Terminals, 1x HDMI, 1x Universal DVI*, 1x SDI
I/O Impedance	Impedance-Independent
De-embedding support	1 stereo pair at 32 kHz, 44.1 kHz, 48kHz from HDMI
Embedded support	1 stereo pair at 48kHz
Operational Modes	
Key	Chromakey or Lumakey
Mix	PC to/from Video and SIS
PIP	Variable Window Size & Position
SDI Jitter	
SMPTTE259M-C (SD-SDI)	(270Mbps: 525/625Line) Jitter < 0.1 UI
SMPTTE292M (HD-SDI)	(1.485/1.4835Gbps: 720p, 1035i, 1080i, 1080p) Jitter < 0.2 UI
SMPTTE424M (3G-SDI)	(2.97/2.967Gbps: 1080p50/60) Jitter < 0.3 UI
Output Vertical Rates - SMPTTE259M-C (SD-SDI)	
525i (720x487)	59.94Hz
625i (720x576)	50Hz
Output Vertical Rates - SMPTTE292M (HD-SDI)	
720p (1280x720)	29.97, 30, 50, 59.94, 60Hz
1080i (1920x1080)	50, 59.94, 60Hz
1080p (1920x1080)	23.98, 24, 25, 29.97, 30Hz
Output Vertical Rates - SMPTTE424M (3G-SDI)	
1080p (1920x1080)	50, 59.94, 60Hz
Control Methods	
Local	via Front Panel Buttons & OLED
RS-232 Interface	via D9 Female Connector
IP Interface	RJ45 Connector
Control Software included	
Warranty	
Limited Warranty	5 Years Parts and Labor
Regulatory Compliance	
Main Units	FCC Class B, CE, RoHS
Power Supplies	UL, cUL, CE, PSE, GS, RoHS
Mechanical	
Size (H-W-D)	42 x 218 x 189mm (1.63" x 8.6" x 7.4")
Weight (Net)	1.26 Kg (2.78 lbs) excluding PSU
Environmental	
Operating Temperature	0° to +40°C (+32° to +104°F) Ambient
Operating Humidity	10% to 85%, Non-condensing
Storage Temperature	-10° to +70°C (+14° to +158°F)
Storage Humidity	10% to 85%, Non-condensing
Power Requirement	
External Power Supply	12V DC @ 1.5A
Accessories Included	
	1x Operations Manual on USB stick
	1x PC Control Software (Microsoft Vista SP2 & above)
	1x Quick Start Guide
	1x Universal Power Supply ('brick' type)
	1x Regional Power Cable
Product Item Number	
	C2-2655
Optional Accessories	
RM-220	Single/Dual Rackmount Kit

Specifications subject to change
The C2-2655 replaces the C2-2155A, C2-2100A and C2-2105A

The New CORIO®2 C2-2000 Series

C2-2855



The C2-2855 Universal Scaler Plus was the first in our new generation of high performance scalers that provides best-in-class video scaling and format conversion along with revolutionary, intuitive user interface tools. Living up to its designation as a “Universal Scaler” the C2-2855 supports SD/HD/3G-SDI, HDMI, DVI, Composite Video, YC, YUV, YPbPr or RGB, on both inputs and outputs.

- Up/Down/Cross Conversion
- Digital Inputs: SD/HD/3G-SDI, Universal DVI*, HDMI (DVI 1.0, HDCP 1.4)
- Analog Inputs: YUV/YPbPr, RGB/YPbPr, CV, YC
- Digital Outputs: SD/HD/3G-SDI, Universal DVI*, HDMI (DVI 1.0, HDCP 1.4)
- Analog Outputs: Universal DVI* (RGB/YPbPr/YUV), CV, YC
- Analog: PC to 1920x1080, HDTV to 1080p/60
- HDMI & DVI : PC to 1920x1200, HDTV to 1080p/60
- Supports: NTSC, PAL, PAL-M, PAL-N
- Motion Compensation & 3:2 Pulldown
- Temporal Interpolation & Diagonal Interpolation
- Automatic Incoming Resolution Detection
- Calibrate - Automatic picture sizing of PC inputs
- 4:4:4 Full bandwidth Chroma Sampling for RGB sources. 4:2:2 for SDI, YC and CV sources. HDMI YUV support for either 4:4:4 or 4:2:2 sampling
- Video signal parameter adjustments
- Integral 4x1 Stereo Analog Audio Routing Switcher, fully integrated with digital audio
- Stereo Audio Embedding on capable outputs (Universal DVI*, HDMI, SDI)
- RS-232 and IP Interface for Control Software
- Variable Image Zoom to 10X and Shrink to 10%
- Genlock
- Framelock
- PIP, Chromakey and Lumakey
- Optional Single/Dual Rackmount Kit

C2-2755



Living up to its designation as a “Video Scaler” the C2-2755 Video Scaler PLUS supports SD/HD/3G-SDI, HDMI, DVI, Composite Video, YC, YUV, YPbPr or RGB, on inputs and HDMI & DVI-I outputs, the signal parameters of the incoming video may be adjusted.

- Up/Down/Cross Conversion
- Digital Inputs: SD/HD/3G-SDI, Universal DVI*, HDMI (DVI 1.0, HDCP 1.4)
- Analog Inputs: YUV/YPbPr, RGB/YPbPr, CV, YC
- Digital Outputs: DVI-I, HDMI (DVI 1.0, HDCP 1.4)
- Analog Outputs: DVI-I (RGB/YPbPr/YUV)
- Analog I/O: PC to 1920x1080, HDTV to 1080p/60
- HDMI & DVI I/O: PC to 1920x1200, HDTV to 1080p/60
- Supports: NTSC, PAL, PAL-M, PAL-N
- Motion Compensation & 3:2 Pulldown
- Temporal Interpolation & Diagonal Interpolation
- Automatic Incoming Resolution Detection
- Calibrate - Automatic picture sizing of PC inputs
- 4:4:4 Full bandwidth Chroma Sampling for RGB sources. 4:2:2 for SDI, YC and CV sources. HDMI YUV support for either 4:4:4 or 4:2:2 sampling
- Video signal parameter adjustments
- Integral 4x1 Stereo Analog Audio Routing Switcher, fully integrated with digital audio
- Stereo Audio Embedding on capable outputs (DVI-I, HDMI)
- RS-232 and IP Interface for Control Software
- Variable Image Zoom to 10X and Shrink to 10%
- Genlock
- Framelock
- PIP, Chromakey and Lumakey
- Optional Single/Dual Rackmount Kit

C2-2655



The C2-2655 Scan Converter Plus lives up to its designation as a “Scan Converter”, it supports HDMI, DVI, Composite Video, YC, YUV, YPbPr or RGB, on both inputs and outputs, and SD/HD/3G-SDI on output only and the signal parameters of the incoming video may be adjusted.

- Up/Down/Cross Conversion PC to Video
- Digital Inputs: Universal DVI*, HDMI (DVI 1.0, HDCP 1.4)
- Analog Inputs: YUV/YPbPr, RGB/YPbPr, CV, YC
- Digital Outputs: SD/HD/3G-SDI, Universal DVI*, HDMI (DVI 1.0, HDCP 1.4)
- Analog Outputs: Universal DVI* (RGB/YPbPr/YUV), CV, YC
- Analog Input: PC to 1920x1080, HDTV to 1080p/60
- Analog Output: PC to 1024x768, HDTV to 1080p/60
- HDMI & DVI Input : PC to 1920x1080, HDTV to 1080p/60
- HDMI & DVI Output : PC to 1024x768, HDTV to 1080p/60
- Supports: NTSC, PAL, PAL-M, PAL-N
- Motion Compensation & 3:2 Pulldown
- Temporal Interpolation & Diagonal Interpolation
- Automatic Incoming Resolution Detection
- Calibrate- Automatic picture sizing of PC inputs
- 4:4:4 Full bandwidth Chroma Sampling for RGB sources. 4:2:2 for YC and CV sources. HDMI YUV support for either 4:4:4 or 4:2:2 sampling
- Video signal parameter adjustments
- Integral 4x1 Stereo Analog Audio Routing Switcher, fully integrated with digital audio
- Stereo Audio Embedding on capable outputs (Universal DVI*, HDMI, SDI)
- RS-232 and IP Interface for Control Software
- Variable Image Zoom to 10X and Shrink to 10%
- Genlock
- Framelock
- PIP, Chromakey and Lumakey
- Optional Single/Dual Rackmount Kit

