Key Features


- 231" seamless large screen with high brightness and powerful speakers
- All-in-One integration for effortless installation
- Anti-collision, dustproof, and moisture-proof with GOB surface treatment
- Detachable system control box for a minimalist appearance and easy access
- Premium aesthetics with an ultra-slim and bezel-free design



Product **Description**

The ViewSonic LDM231-251 is a cutting-edge 231" All-in-One LED display designed to elevate visual and auditory experiences in high-end corporate and educational environments. Boasting an impressive 600-nit brightness, a high 6,500:1 contrast ratio, and a 3,840Hz refresh rate, complemented by dual 30W speakers, it ensures exceptional clarity and immersive audio for every video, presentation, or lecture. The All-in-One design seamlessly streamlines installation, allowing 2 people to set it up within 2 hours, thereby minimizing labor costs and downtime. This display utilizes the Glue-on-Board (GOB) surface treatment technology, achieving an IP54 rating for enhanced protection from collisions, dust, and moisture. Featuring a 31mm ultra-slim design and 6mm thin bezels, the display offers a premium aesthetic and ensures an engaging viewing experience. Additionally, the detachable control box enables it to achieve a nearly 99% screen-to-body ratio, seamlessly integrating into any space while providing easy accessibility. Moreover, it supports PIP/PBP display and wireless casting capabilities, offering more flexibility for collaboration. Adding to its convenience, compatibility with AV control systems enables IT staff to remotely configure the display.



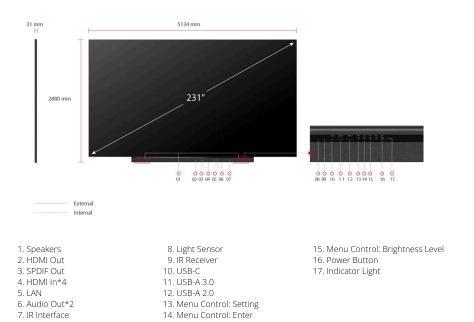

Visit Us www.viewsonic.com



| CD | EC | 16 | $\Gamma \Lambda \Gamma$ | ΓΙΟΝ |
|----|----|----|-------------------------|------|
| 31 | EL | ır | ILAI | IUN |

| SPEC | IFICATION | | (| |
|--------------------------|---------------------|--|---|--|
| Scre | en Size: | 231" | | |
| Display Area (mm): | | 5120 (H) x 2880 (V) | | |
| Native Resolution: | | 2048x1152 | | |
| Pane | el Technology: | Direct view LED | | |
| LED | Package Type: | SMD 3 in 1 | | |
| Bono | ling Wire: | Copper | | |
| Pixel | Pitch (mm): | 2.5 | | |
| Refre | esh Rate: | 3840Hz | | |
| Brigh | ntness (max.): | 600 nits (100 levels adjustable) | | |
| Contrast Ratio (typ.): | | 6500:1 | | |
| Orientation: | | Landscape | | |
| Viewing Angles (typ.): | | H = 170, V = 170 | ì | |
| LED | Lifetime (typ.): | 100,000 Hours | | |
| Loca | l Storage: | Total 32GB (26GB available storage) | | |
| Emb | edded OS: | Android 9.0 | | |
| Resc | olution Support: | VGA(640 x 480) to 4k(3840 * 2160@60hz) | | |
| HDT | V Compatibility: | 480p, 576p, 720p, 1080p, 2160p | | |
| Horiz | zontal Frequency: | 31K-94kHz | • | |
| Verti | cal Scan Rate: | 56-85Hz | | |
| INPU | JT | | | |
| HDM | II: | x4 (HDMI 2.0, HDCP 2.2) (internal x3 + external x1) | | |
| USB | Type A: | x2 (USB3.0 x1, USB2.0 x1) | | |
| RJ45 | 5 Input (Internet): | x3 (internet x2, control x1) | | |
| IR in | : | x1 | | |
| Wi-F | i Input: | 2.4G/5G Hz | | |
| USB | Type C: | x1 (data only) | | |
| OUT | PUT | | | |
| HDM | Il out: | x1 (HDMI 1.4, HDCP 1.4) (internal x1) | | |
| Spea | aker: | 30Wx2 | | |
| Audi | o out (3.5mm): | x2 | | |
| USB Type A (Power): | | Shared with USB input (5V/0.9A x1, 5V/0.5A x1, USB-C 5V/1A x1) | | |
| CONTROL | | | | |
| RJ45 (LAN control): | | x1(shared with internet) | | |
| USB | Type A (Services): | x1(shared with USB A input) | | |
| RS232 (DB 9-pin female): | | x1 | | |
| | | | | |

OTHERS

| Power Supply Voltage: | 100-120V/40A ~ 50/60Hz or 220-240V/25A ~ 50Hz (vary by country) | | |
|--|---|--|--|
| Power Consumption: | 1443W (typ), 4124W (max) < 0.7W (Off) | | |
| Operating Temperature: | 0~40°C | | |
| LED Module Quantity: | 288 | | |
| Ingress Protection Rating: | IP54(Front) | | |
| Net Weight: | 833.34 lbs (378kg) | | |
| Gross Weight: | 1600.56 lbs (726kg) | | |
| Screen Dimensions (WxHxD): | 202.1x113.4x1.2 inches (5134 x 2880 x 31mm) (TBD) | | |
| Screen Dimensions (WxHxD) with wall mount: | 202.047 x 113.86 x 2.1 inches (5132 x 2892 x 53mm) | | |
| Packing Dimensions (WxHxD): | 64.96 x 37.4 x 19.68 inches x4 (1650 x 950 x 500 mm x4) 59.05 x 43.3 x 41.33 inch (1500 x 1100 x 1050 mm) 77.95 x 14.96 x 18.5 inch (1980 x 380 x 470mm) | | |
| STANDARD ACCESSORIES | | | |

STANDARD ACCESSORIES

| Power Cord: | x1 | | |
|----------------------|-------------------------|--|--|
| LAN Cable (Cat 5A): | x1 | | |
| IR Extender Cable: | x1 | | |
| Remote Control: | x1 | | |
| QSG: | x1 (Installation guide) | | |
| Wall Mount: | x1 | | |
| Spare Parts: | LED PCB Unit x20 | | |
| Maintenance Tool: | LD-MK-004 x1 | | |
| ODTIONAL ACCECCODIEC | | | |

OPTIONAL ACCESSORIES

| Maintenance Tool: | LD-MK-004 |
|------------------------------------|------------|
| ViewBoard Cast Button(USB-C): | VB-WPS-001 |
| ViewBoard Cast Button(USB-A+HDMI): | VB-WPS-003 |

x1

IR Receiver:

 $\label{lem:copyright} \ @\ ViewSonic\ Corporation\ 2000-2024.\ All\ rights\ reserved.$

