



DIRECT VIEW LED

LDP216-251


Key Features

- Impressively large, bezel-free visual experiences
- All-in-One design without complicated setup
- Real-to-life colors and high brightness
- Immersive audio from built-in Harman Kardon speakers
- Adaptable and flexible to suit any display scenario



Product Description

Gaze upon astoundingly lifelike imagery on the minimalistic 2nd Gen 135" ViewSonic® LDP135-151 All-in-One Direct View LED display. The All-in-One modular design offers an effortless installation and maintenance process. This next-generation display is upgraded with advanced features to deliver a spectacular audiovisual experience and user-forward design. Delivering 120% Rec. 709 wide color gamut, lightning-fast 4,440Hz refresh rate, and a peak brightness of 600 nits, every video, presentation, or lecture will be an immersion of real-to-life color and extraordinary detail. The display is also equipped with Harman Kardon speakers, 4K/HDR/HLG support and Frame Interpolation technology for unsurpassable, immersive content delivery. At 25mm slim and lined with a 5mm frameless edge, the sleek display exudes sophistication and elegance in any modern setting. It offers flexibility and adaptability in design – with portrait and landscape installations to complement any space and scenario. The screens can be easily fused together to form an ultra-wide 32:9 video wall to deliver a seamless visual experience in epic proportions. The system control box can also be easily detached to blend into every design.

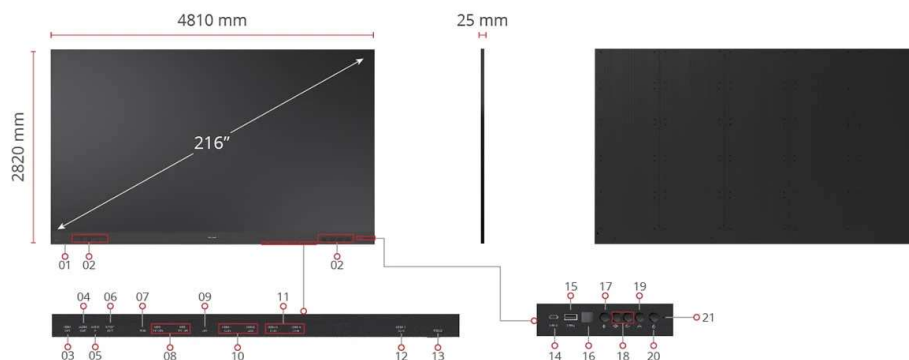

- | | | |
|---------------------------|--------------------------|------------------------------------|
| 1. Power Switch | 8. USB 2.0 (5V/1.5A) x 2 | 15. USB 2.0 (5V/1.5A) |
| 2. Harman Kardon Speakers | 9. LAN & Control | 16. IR Receiver |
| 3. HDMI Out | 10. HDMI 2.0 x 2 | 17. Menu Control: Brightness Level |
| 4. Audio Out | 11. HDMI 1.4 x 2 | 18. Menu Control: Volume |
| 5. Audio In | 12. HDMI 2.1 | 19. Menu Control: Input Source |
| 6. S/PDIF Out | 13. RS232 | 20. Power Button |
| 7. IR In | 14. USB-C (5V/2A) | 21. Indicator Light |
-

Visit Us www.viewsonic.com

SPECIFICATION

Screen Size:	216"
Display Area (mm):	4800 (H) x 2700(V)
Native Resolution:	1920x1080
Panel Technology:	Direct view LED
LED Package Type:	SMD 3 in 1
Bonding Wire:	Gold
Pixel Pitch (mm):	2.50
Refresh Rate:	4440Hz
Brightness (max.):	600 nits (8 levels adjustable)
Contrast Ratio (typ.):	6000:1
Orientation:	Landscape / Portrait
Viewing Angles (typ.):	H = 160, V = 160
LED Lifetime (typ.):	100,000 Hours
Local Storage:	Total 64GB (56GB available storage)
Embedded OS:	Android 9.0
Resolution Support:	VGA(640 x 480) to 1080p(1920 x 1080)
HDTV Compatibility:	480i, 480p, 576i, 576p, 720p, 1080i, 1080p, 2160P/60Hz
Horizontal Frequency:	23-120 kHz
Vertical Scan Rate:	15-135 Hz

INPUT

HDMI:	x6(HDMI 2.1 x 1, HDMI 2.0 x 2, HDMI 1.4 x 2, HDMI 2.0 internal x1)
USB Type A:	x3(USB2.0 x3)
RJ45 Input (Internet):	x1
IR in:	x1
Wi-Fi Input:	2.4G/5G Hz
USB Type C:	x1(Video input, Power output (5V/2A))
Audio-in (3.5mm):	x1
HDBaseT:	x1(1080P@100m, 4K30Hz@70m)

OUTPUT

HDMI out:	x2(HDMI 2.0 external x1, internal x1)
Speaker:	20W x2 (harman kardon)
Audio out (3.5mm):	x1
USB Type A (Power):	Shared with USB input(5V/1.5A x3)

CONTROL

RJ45 (LAN control):	x1(shared with internet)
USB Type A (Services):	x1(shared with USB A input)
RS232 (DB 9-pin female):	x1
IR Receiver:	x1

OTHERS

Power Supply Voltage:	100-120V/30A~ 50/60Hz or 220-240V/15A~ 50Hz(vary by country)
Power Consumption:	3430W (typ), 4900W (max)< 0.5W (Sleep), < 0W (Off)
Operating Temperature:	0~40°C
LED Module Quantity:	128
Ingress Protection Rating:	IP30
Net Weight:	640 lbs(290 kg)
Gross Weight:	883 lbs(400 kg)
Screen Dimensions (WxHxD):	189.4x111x1 inches(4810 x 2820 x 25 mm)
Screen Dimensions (WxHxD) with wall mount:	189.4x111x2.2 inches(4810 x 2820 x 57 mm)
Packing Dimensions:	109.4x27.95x37 inches(2780 x 710 x 940 mm)

STANDARD ACCESSORIES

Power Cord:	x2
LAN Cable (Cat 5A):	x1 (5m)
IR Extender Cable:	x1(3m)
Remote Control:	x1
QSG:	x1
Wall Mount:	x1
Spare Parts:	LED PCB Unit x7
Maintenance Tool:	LD-MK-001 x1

OPTIONAL ACCESSORIES

Maintenance Tool:	LD-MK-001
ViewBoard Cast Button(USB-C):	VB-WPS-001
ViewBoard Cast Button(USB-A+HDMI):	VB-WPS-003