


## Key **Features**

- Touch function for wet hands and multiple types of glove
- Pen clicks & Palm rejection technology
- 4-sides frameless design and optional stand for flexibility
- Friendly touch mode setting
- Intuitive touch OSD with ViewSonic Touch
  Controller



## Product **Description**

The ViewSonic's TD2465 is the ideal solution for commercial and industrial spaces. Designed for wet hands touch, glove touch, and for any conductive stylus' tip touch including pencil. The TD2465 delivers an intuitive 10-point PCAP touch technology for maximum interactivity. Featuring ViewSonic Touch Controller software, allowing you to control the device intuitively. Connection options include HDMI and DisplayPort inputs for effortless sharing capabilities. Equipped with VESA mounting design for any surface and Kiosk, the touch screen is the perfect display for various.

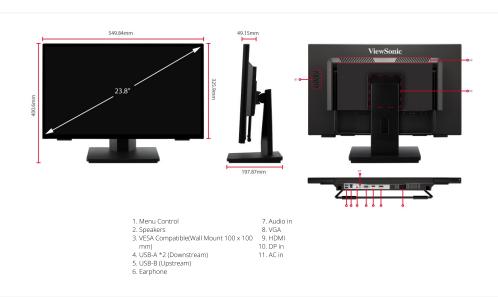

**Visit Us** 

www.viewsonic.com

DISPLAY		CONTROLS	
Display Size (in.):	24	Physical Controls:	1, 2, Up, Down, Power
Viewable Area (in.):	23.8		Auto Image Adjust,
Panel Type:	VA Technology	On Screen Display:	Contrast/Brightness, Input Select, Audio Adjust, Color Adjust,
Resolution:	1920 x 1080		Information, Manual Image Adjust, Setup Menu, Memory Recall
Resolution Type:	FHD (Full HD)	OPERATING CONDITIONS	
Static Contrast Ratio:	3,000:1 (typ)	Temperature:	32°F to 104°F (0°C to 40°C)
Dynamic Contrast Ratio:	20M:1	Humidity (non-condensing):	20% to 90%
Light Source:	LED	WALL MOUNT	
Brightness:	250 cd/m² (typ)	VESA Compatible:	100 x 100 mm
Colors:	16.7M	INPUT SIGNAL	
Color Space Support:	8 bit (6 bit + Hi-FRC)	Frequency Horizontal:	24 ~ 82KHz
Aspect Ratio:	16:9	Frequency Vertical:	50 ~ 75Hz
Response Time (Typical GTG):	7ms	VIDEO INPUT	
Response Time (GTG w/OD):	6.969ms	Digital Sync:	TMDS - HDMI (v1.4), PCI-E -
Response Time (Typical Tr+Tf):	16ms	Digital Cyrio.	DisplayPort (v1.2)
Viewing Angles:	178° horizontal, 178° vertical	Analog Sync:	Separate/Composite/SOG - RGB Analog
Backlight Life (Hours):	30000 Hrs (Min)	ERGONOMICS	
Curvature:	, ,	Tilt (Forward/Back):	-5° / 20°
-	Flat	WEIGHT (IMPERIAL)	
Refresh Rate (Hz):	60	Net (lbs):	12.5
Blue Light Filter:	Yes	Net Without Stand (lbs):	10.4
Flicker-Free:	Yes	Gross (lbs):	15.8
Color Gamut:	NTSC: 72% size (Typ) sRGB: 102% size (Typ)	WEIGHT (METRIC)	
Pixel Size:	0.275 mm (H) x 0.275 mm (V)	Net (kg):	5.7
Touch Screen:	Projected Capacitive, 10-point multi-	Net Without Stand (kg):	4.7
	touch	Gross (kg):	7.2
Surface Treatment:	Glossy, Hard Coating (7H)	DIMENSIONS (IMPERIAL) (W	XHXD)
Cover Glass Thickness:	1.2mm	Packaging (in.):	25.5 x 16.8 x 5.4
COMPATIBILITY		Physical (in.):	21.6 x 15.8 x 7.8
PC Resolution (max):	1920x1080	Physical Without Stand (in.):	21.6 x 12.8 x 1.9
Mac® Resolution (max):	1920x1080	DIMENSIONS (METRIC) (WXI	HXD)
PC Operating System:	Windows 10/11 certified; macOS tested	Packaging (mm):	647 x 426 x 138
Mac® Resolution (min):	1920x1080	Physical (mm):	550 x 401 x 198
CONNECTOR		Physical Without Stand (mm):	550 x 326 x 49
VGA:	1	GENERAL	
USB 3.2 Type A Down Stream:	2		cTUVus, FCC-B, ICES003, Energy
USB 3.2 Type B Up Stream:	1	Regulations:	Star, EPEAT, CEC, NOM, Mexico Energy, CE, CE EMC, CB, RoHS,
3.5mm Audio In:	1		ErP, REACH, WEEE, EAC, UkrSEPRO, UKCA, RCM
3.5mm Audio Out:	1		TD2465 x1, 3-pin Plug (IEC C13 /
HDMI 1.4:	1	PACKAGE CONTENTS:	CEE22) x1, HDMI Cable (v1.4; Male- Male) x1, USB A/B Cable (v3.2; Male- Male) x1, Quick Start Guide x1
DisplayPort:	1		
Power in:	3-pin Socket (IEC C14 / CEE22)	Recycle/Disposal:	Please dispose of in accordance with local, state or federal laws.
AUDIO	5 pill Gooket (IEO G14 / GEEZZ)		*Warranty offered may differ from
Internal Speakers:	2Watts x2	Warranty:	market to market
POWER	2.1.0100 AZ	Power Management:	Energy Star standards, EPEAT
Eco Mode (Conserve):	20W		
Eco Mode (optimized):	22W		
Consumption (typical):	24W		
Consumption (max):	26W		
Voltage:	AC 100-240V		
	0.5W		
Stand-by:		1	
Power Supply:	Internal Power Supply		
ADDITIONAL HARDWARE	1		
Kensington Lock Slot:	1	l .	

Cable Organization:

Yes